

Warning  • Daikin Industries, Ltd.'s products are manufactured for export to numerous countries throughout the world. Daikin Industries, Ltd. does not have control over which products are exported to and used in a particular country. Prior to purchase, please therefore confirm with your local authorised importer, distributor and/or retailer whether this product conforms to the applicable standards, and is suitable for use, in the region where the product will be used. This statement does not purport to exclude, restrict or modify the application of any local legislation.

- Ask a qualified installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Use only those parts and accessories supplied or specified by Daikin. Ask a qualified installer or contractor to install those parts and accessories. Use of unauthorised parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Read the User's Manual carefully before using this product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

If you have any enquiries, please contact your local importer, distributor and/or retailer.

Cautions on product corrosion

1. Air conditioners should not be installed in areas where corrosive gases, such as acid gas or alkaline gas, are produced.
2. If the outdoor unit is to be installed close to the sea shore, direct exposure to the sea breeze should be avoided. If you need to install the outdoor unit close to the sea shore, contact your local distributor.



JMI-0107



JQA-1452

About ISO 9001
ISO 9001 is a plant certification system defined by the International Organization for Standardization (ISO) relating to quality assurance. ISO 9001 certification covers quality assurance aspects related to the "design, development, manufacture, installation, and supplementary service" of products manufactured at the plant.



EC99J2044

About ISO 14001
ISO 14001 is the standard defined by the International Organization for Standardization (ISO) relating to environmental management systems. Our group has been acknowledged by an internationally accredited compliance organisation as having an appropriate programme of environmental protection procedures and activities to meet the requirements of ISO 14001.

Dealer

DAIKIN INDUSTRIES, LTD.

Head Office:
Umeda Center Bldg., 2-4-12, Nakazaki-Nishi,
Kita-ku, Osaka, 530-8323 Japan

Tokyo Office:
JR Shinagawa East Bldg., 2-18-1, Konan,
Minato-ku, Tokyo, 108-0075 Japan
http://www.daikin.com/global_ac/

©All rights reserved
Printed in Japan 05/08/005 SW-HP-SS

• Specifications, designs and other content appearing in this brochure are current as of May 2008 but subject to change without notice.





AIR CONDITIONING SYSTEM

- COOLING ONLY [50 Hz]
- HEAT PUMP [50 Hz]

**Creation of
Comfort**

A breath of Elegance

*Stores often feature the latest in designed décor.
This refined beauty attracts people.
Meanwhile, offices have a functional beauty.
This encourages those within to work hard and apply intelligence and passion to their tasks.
In either situation, a certain elegance should fill the space because thinking minds require high quality air conditioning. SkyAir by Daikin realise a comfortable indoor environment. All over the world, stores, offices, and homes prefer the low operating sound, attractive design, comfort control, and other benefits brought by SkyAir.*

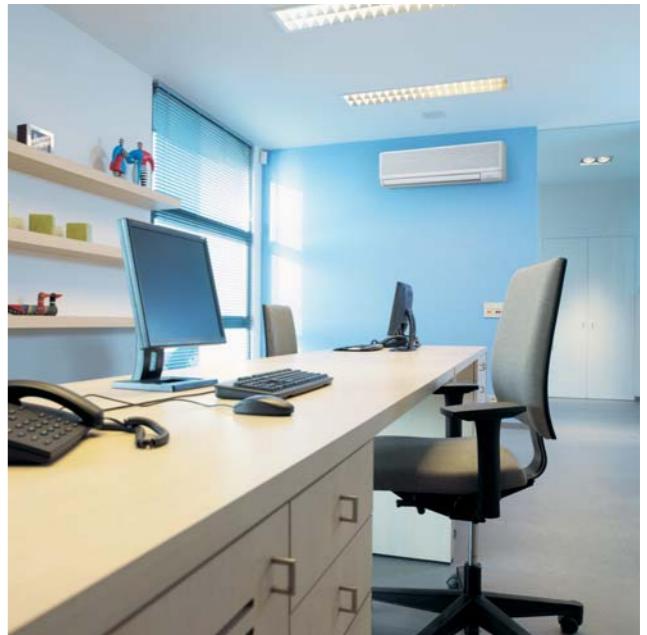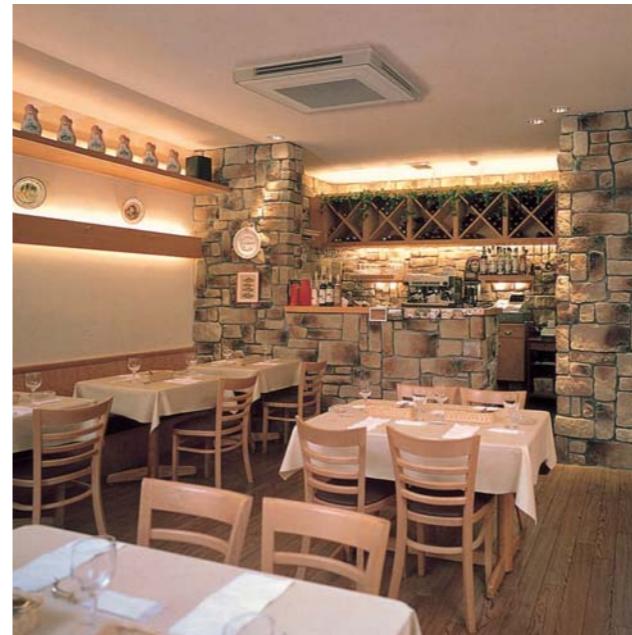

Product Line-up

Cooling only

SkyAir

Capacity

	HP	1	1.5	2	2.5	3	4		5	6	7	8	10	15	20
kW	2.6	3.5	5.3	6.4	7.7	10.5			12.8	14.2	16.8	24.0	29.2	47.9	58.4
Btu/h	8,900	11,900	18,100	21,800	26,200	35,700			43,600	48,400	57,500	81,800	99,600	163,500	199,400
kcal/h	2,250	3,010	4,560	5,500	6,600	9,000			11,000	12,200	14,400	20,600	25,100	41,200	50,200

CEILING MOUNTED CASSETTE TYPE

(Page 11-14)

Specifications Page 39
Dimensions Page 60

Indoor unit
Outdoor unit



FHC35KVE

FHC50KVE

FHC60KVE

FHYC71KVE

FHYC100KVE

FHYC125KVE

FHYC140KVE

R35GV1

R50GV1

R60GV1

R71LUV1 / Y1

R100LUV1 / Y1

R125LUV1

R140LUV1





CEILING SUSPENDED TYPE

(Page 15-16)

Specifications Page 39
Dimensions Page 60

Indoor unit
Outdoor unit



FH35BVE

FH50BVE

FH60BVE

FHY71BVE

FHY100BVE

FHY125BVE

R35GV1

R50GV1

R60GV1

R71LUV1 / Y1

R100LUV1 / Y1

R125LUV1

CEILING SUSPENDED CASSETTE TYPE

(Page 17-18)

Specifications Page 40
Dimensions Page 61

Indoor unit
Outdoor unit



FHK35FV1

FHK45FV1

FHK60FV1

FHYK71FJV1

R35GV1

R50GV1

R60GV1

R71LUV1 / Y1

CEILING MOUNTED BUILT-IN TYPE

(Page 21-22)

Specifications Page 41
Dimensions Page 62

Indoor unit
Outdoor unit



R35GV1

R50GV1

R60GV1

R71LUV1 / Y1

R100LUV1 / Y1



R125LUV1

WALL MOUNTED TYPE

(Page 23-24)

Specifications Page 41
Dimensions Page 63

Indoor unit
Outdoor unit



R71LUV1 / Y1



R100LUV1 / Y1

FLOOR STANDING TYPE

(Page 25-26)

Specifications Page 42
Dimensions Page 63

Indoor unit
Outdoor unit



R71LUV1 / Y1

R100LUV1 / Y1

R125LUV1

PACKAGED AIR CONDITIONERS

DUCT CONNECTION

(Page 27-30)

LOW STATIC PRESSURE TYPE

Specifications Page 42

Dimensions Page 64

Indoor unit
Outdoor unit



R25JV1

R35JV1

R50GV1

R60GV1

R71FUV1 / Y1

(Type without factory charged refrigerant)




(Type without factory charged refrigerant)

MIDDLE STATIC PRESSURE TYPE

Specifications Page 43

Dimensions Page 64,65

Indoor unit
Outdoor unit



RG71AV1 / Y1


R100FUV1 / Y1

R125FUV1

RG140AY1

RG180AY1

Indoor unit
Outdoor unit




R71LUV1 / Y1

R100LUV1 / Y1

R125LUV1

R140LUV1

Indoor unit
Outdoor unit



R71FUV1

Product Line-up

Cooling only

SkyAir

Simultaneous operation system

TWIN MULTI OPERATION

(Page 31-32)
Specifications Page 46-48

Capacity

The values given on the right are for the FHYC type.

HP	3	4	5	6		8	10
kW	7.7	10.5	12.8	14.2		22.2	26.6
Btu/h	26,200	35,700	43,600	48,400		75,800	90,800
kcal/h	6,600	9,000	11,000	12,200		19,100	22,900

CEILING MOUNTED CASSETTE TYPE



Indoor unit
Outdoor unit

FHYC35KVE x 2 FHYC50KVE x 2 FHYC60KVE x 2 FHYC71KVE x 2 FHYC100KVE x 2 FHYC125KVE x 2
R71LUV1 / Y1 R100LUV1 / Y1 R125LUV1 R140LUV1 R200KUY1 R250KUY1

CEILING SUSPENDED TYPE



Indoor unit
Outdoor unit

FHY35BVE x 2 FHY50BVE x 2 FHY60BVE x 2 FHY71BVE x 2 FHY100BVE x 2 FHY125BVE x 2
R71LUV1 / Y1 R100LUV1 / Y1 R125LUV1 R140LUV1 R200KUY1 R250KUY1

DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE



Indoor unit
Outdoor unit

FDYM04FAV1 x 2 FDYM05FAV1 x 2
R200KUY1 R250KUY1

OUTDOOR UNIT

(Page 33-34)



Simultaneous operation system

DOUBLE TWIN MULTI OPERATION


(Page 31-32)
Specifications Page 46-48

Capacity

The values given on the right are for the FHYC type.


HP	6	8		8	10
kW	14.2	22.2		22.2	26.6
Btu/h	48,400	75,800		75,800	90,800
kcal/h	12,200	19,100		19,100	22,900

CEILING MOUNTED CASSETTE TYPE



Indoor unit
Outdoor unit

FHYC50KVE x 3 FHYC71KVE x 3 R140LUV1 R200KUY1



Simultaneous operation system

TRIPLE MULTI OPERATION


(Page 31-32)
Specifications Page 46-48

CEILING SUSPENDED TYPE



Indoor unit
Outdoor unit

FHY50BVE x 3 FHY71BVE x 3 R140LUV1 R200KUY1

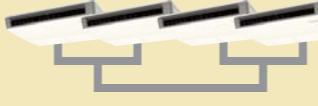

R200KUY1

FHY50BVE x 4 FHY60BVE x 4
R250KUY1

DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE



Indoor unit
Outdoor unit

FDYM03FAV1 x 3 R200KUY1

OUTDOOR UNIT


(Page 33-34)




R200KUY1

R250KUY1


Simultaneously running 2 to 4 units distributes comfort across wide spaces.

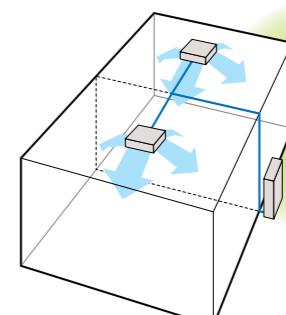

Simultaneous control with 2 units in spacious space

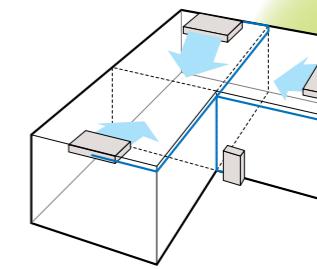

Simultaneous control with 3 units for irregularly shaped space

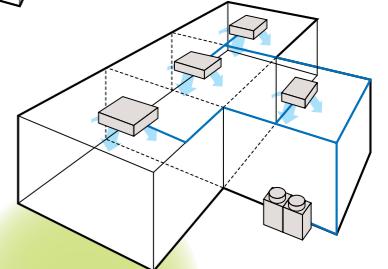

Simultaneous control with 4 units for large space

Product Line-up

Heat pump

SkyAir

Capacity	HP	1.5	2	2.5	3		4	5	6	8	10	15	20	
	Cooling	kW	3.75	5.2	6.15	7.7		10.4	12.8	14.2	22.2	27.1	43.5	53.0
		Btu/h	12,800	17,800	21,000	26,200		35,300	43,600	48,400	75,700	92,500	148,000	181,000
		kcal/h	3,230	4,470	5,290	6,600		8,900	11,000	12,220	19,100	23,300	37,400	45,600
	Heating	kW	4.22	5.8	7.0	7.9		11.2	14.2	16.3	23.2	29.5	44.8	56.8
		Btu/h	14,400	19,800	23,900	27,000		38,100	48,400	56,000	79,200	100,700	153,000	194,000
		kcal/h	3,630	4,990	6,020	6,800		9,600	12,200	14,000	20,000	25,400	38,500	48,800

PACKAGED AIR CONDITIONERS		Outdoor unit	RY17LUV1 / Y1	RY100LUV1 / Y1	RY125LUV1	RY125LUV1 x 2	RY250LUV1	RY250LUV1 x 2	RY250LUV1 x 2	RY250LUV1 x 2		
DUCT CONNECTION	LOW STATIC PRESSURE TYPE Specifications Page 52 Dimensions Page 64											
	Indoor unit	FDYB35KAVE	FDYB50KAVE	FDYB60KAVE	FDYB71KAVE							
	Outdoor unit	RY35FV1A	RY50GAV1A	RY60GAV1A	RY71LUV1 / Y1							
Page 27-30	MIDDLE STATIC PRESSURE TYPE Specifications Page 53 Dimensions Page 64,65											
	Indoor unit		FDYM03FAV1		FDYM04FAV1	FDYM05FAV1	FDYM06FAV1					
	Outdoor unit		RY71LUV1 / Y1		RY100LUV1 / Y1	RY125LUY1	RY140LUY1					
Page 27-30	HIGH STATIC PRESSURE TYPE Specifications Page 54 Dimensions Page 65-67											
	Indoor unit				FDY06KAY1	FDY08KAY1	FDY10KAY1	FDY15KAY1	FDY20KAY1			
	Outdoor unit				RY140LUY1	RY200KUY1	RY250KUY1	RY200KUY1 x 2	RY250KUY1 x 2			
OUTDOOR UNIT												
Dimensions Page 68-74		RY35FV1A	RY50GAV1A	RY60GAV1A	RY71LUV1 RY71LUY1	RY100LUV1 RY100LUY1	RY125LUY1	RY140LUY1	RY200KUY1	RY250KUY1	RY200KUY1 x 2	RY250KUY1 x 2


Product Line-up

Heat pump


SkyAir

Simultaneous operation system		TWIN MULTI OPERATION						(Page 31-32) Specifications Page 54-56			
Capacity Cooling / Heating The values given on the right are for the FHYC type.	HP	3	4	5	6		8	10			
	kW	7.7/7.9	10.4/11.2	12.8/14.2	14.2/16.3		22.2/22.7	26.6/28.4			
	Btu/h	26,200/27,000	35,300/38,100	43,600/48,400	48,400/56,000		75,800/77,500	90,800/97,000			
	kcal/h	6,600/6,800	8,900/9,600	11,000/12,200	12,200/14,000		19,100/19,500	22,900/24,400			
CEILING MOUNTED CASSETTE TYPE											
Indoor unit	FHYC35KVE x 2	FHYC50KVE x 2	FHYC60KVE x 2	FHYC71KVE x 2		FHYC100KVE x 2	FHYC125KVE x 2				
Outdoor unit	RY71LUV1 / Y1	RY100LUV1 / Y1	RY125LUY1	RY140LUY1		RY200KUY1	RY250KUY1				
CEILING SUSPENDED TYPE											
Indoor unit	FHY35BVE x 2	FHY50BVE x 2	FHY60BVE x 2	FHY71BVE x 2		FHY100BVE x 2	FHY125BVE x 2				
Outdoor unit	RY71LUV1 / Y1	RY100LUV1 / Y1	RY125LUY1	RY140LUY1		RY200KUY1	RY250KUY1				
DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE											
Indoor unit						FDYM04FAV1 x 2	FDYM05FAV1 x 2				
Outdoor unit						RY200KUY1	RY250KUY1				
OUTDOOR UNIT											
											
Simultaneous operation system		TRIPLE MULTI OPERATION				(Page 31-32) Specifications Page 54-56					
Capacity Cooling / Heating The values given on the right are for the FHYC type.	HP	6		8		Simultaneous operation system					
	kW	14.2/16.3		22.2/22.7		DOUBLE TWIN MULTI OPERATION					
	Btu/h	48,400/56,000		75,800/77,500		8	10				
	kcal/h	12,200/14,000		19,100/19,500		22.2/22.7	26.6/28.4				
CEILING MOUNTED CASSETTE TYPE											
Indoor unit	FHYC50KVE x 3		FHYC71KVE x 3			FHYC50KVE x 4		FHYC60KVE x 4			
Outdoor unit	RY140LUY1		RY200KUY1			RY200KUY1		RY250KUY1			
CEILING SUSPENDED TYPE											
Indoor unit	FHY50BVE x 3		FHY71BVE x 3			FHY50BVE x 4		FHY60BVE x 4			
Outdoor unit	RY140LUY1		RY200KUY1			RY200KUY1		RY250KUY1			
DUCT CONNECTION LOW STATIC PRESSURE TYPE											
Indoor unit			FDYB71KAVE x 3			FDYB50KAVE x 4		FDYB60KAVE x 4			
Outdoor unit			RY200KUY1			RY200KUY1		RY250KUY1			
DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE											
Indoor unit			FDYM03FAV1 x 3								
Outdoor unit			RY200KUY1								
OUTDOOR UNIT											
											


**Simultaneously running
2 to 4 units distributes
comfort across wide spaces.**

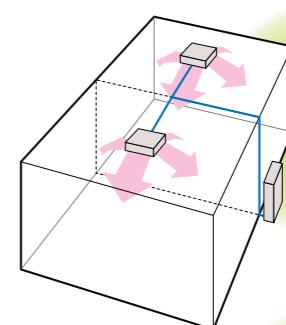

Simultaneous control with
2 units in spacious space

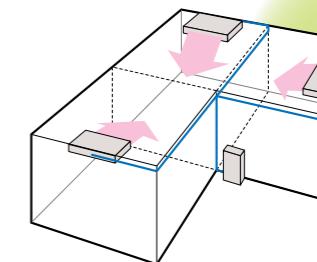

Simultaneous control with
3 units for irregularly
shaped space

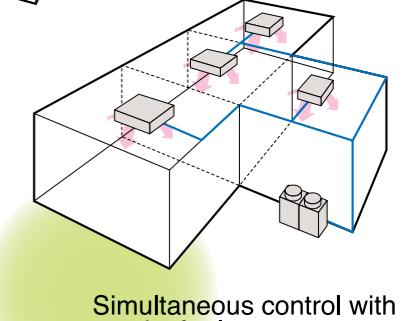

Simultaneous control with
4 units for large space

CEILING MOUNTED CASSETTE TYPE FH(Y)C

Cooling only FH(Y)C35KVE-140KVE
Heat pump FHYC35KVE-140KVE

**Quiet, decor-blending form
and easy installation in
new or old buildings.**



Sound level
35/30 dB(A)
High Low
FHYC71K

SUPER CASSETTE



Accessory required for indoor unit (option)

Wired LCD remote controller



BRC1C61

Note: Remote controller cable not included. Cables must be procured locally.

Wireless LCD remote controller




Cooling only
BRC7C613W
Heat pump
BRC7C612W

A signal receiver must be added to the indoor unit.

Signal receiver unit (Installed type)
Wireless remote controller and signal receiver unit are sold as a set.

Unified square panels

All models from the 35K to 140K use the same size panel. Multiple unit installations maintain a physical uniformity that is aesthetically pleasing and make it easier to plan ceiling lighting systems and to design interiors.

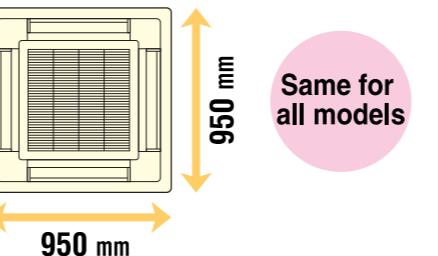

Compact body and quiet operation

Indoor units use an aerodynamically designed Diffuser Turbo Fan




Draft resistance has been reduced by incorporating, into a single unit, an impeller and a diffuser to control air flow inside the unit. The Diffuser Turbo Fan is both quiet during operation and compact.

Indoor unit	High	Low
35K	33	29
50K	33	29
60K	35	30
71K	35	30
100K	39	34
125K	42	36
140K	44	37

Note: Anechoic chamber conversion value, measured according to JIS parameters and criteria.

Air direction can be selected according to installation.

Note: Operation sound increases when using 2-way or 3-way flow.

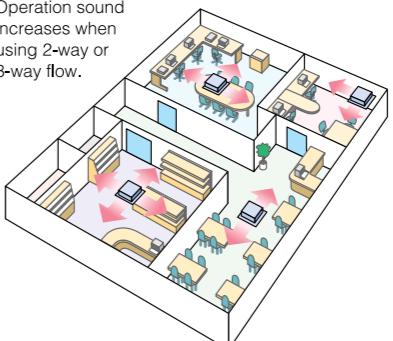

Two selectable temperature-sensors

Both indoor unit and wired remote controller (option) contain temperature-sensors. Temperature sensing can be set at the unit or, to further improve comfort level, closer to the target area at the wired remote control.

*Temperature-sensor on indoor unit must be used when the air conditioner is controlled from another room.

**Wireless remote controller does not have a temperature-sensor.


Optimal comfort and convenience assured by 3 air discharge modes

Air direction	Draft prevention setting	Standard setting	Setting to prevent soiling of ceiling
Desired situation	When drafts are unwanted	For gentle drafts (Ceiling is soiled.)	When ceilings must be kept spotless
Auto-swing	Auto-swing between 10° and 40°	Auto-swing between 10° and 65°	Auto-swing between 30° and 65°
5-levels air direction setting	Settable to 5 different levels between 10° and 40°	Settable to 5 different levels between 10° and 65°	Settable to 5 different levels between 30° and 65°
Draft prevention (In heating mode)	At heating startup and thermo OFF*, air direction is automatically set to a near horizontal 10° to prevent direct exposure to cool air drafts.	At heating startup and thermo OFF*, air discharge is automatically set to 30° to prevent both direct exposure to cool air drafts and contact with ceilings.	At heating startup and thermo OFF*, air discharge is automatically set to 30° to prevent both direct exposure to cool air drafts and contact with ceilings.
Auto air direction control	The air direction is set automatically to the memorised position of the previous air direction. (Initial setting is 65° for heating and 30° for cooling.)		

Note: Air direction is set to the standard position when the unit is shipped from the factory. The position can be changed from the remote controller.

*When the thermostat turns off.

Multi-Flow System



4-way flow	
3-way flow	
2-way flow	

"■" denotes piping direction. "■" denotes sealing member for air discharge outlet (option).

Note: For 3-way or 2-way flow installation, the sealing member for air discharge outlet (option) must be used to close off the unused outlet(s).

Wide air distribution

A newly shaped air discharge opening increases flow without increasing wind speed, hence discharged air reaches farther than before.

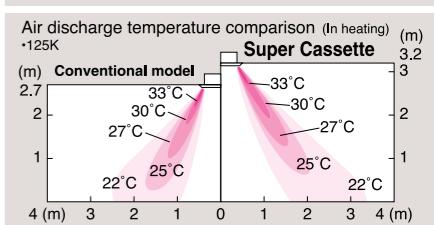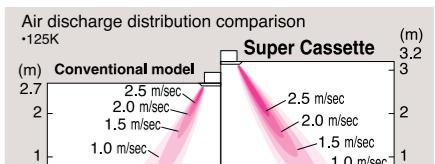

Suitable for high ceilings

■ Criteria for ceiling height and number of air discharge outlets

	Number of air discharge outlets used			
	35K-71K	100K-140K	4-way flow	3-way flow
Ceiling height	2.7 m	3.0 m	3.5 m	3.6 m
High ceiling ①	3.0 m	3.3 m	3.8 m	4.0 m
High ceiling ②	3.5 m	3.5 m	—	4.2 m

Note: Initial settings are for standard ceiling height and 4-way flow. High ceiling settings ① and ② are set from the remote controller.


Programme "Dry"

Dehumidification is microprocessor controlled to prevent abrupt and uncomfortable changes in air temperature.

Switchable fan speed: High/Low

Quick and easy to install

**Just 240 mm high.
Installable in tight ceiling
spaces (35K-71K)**

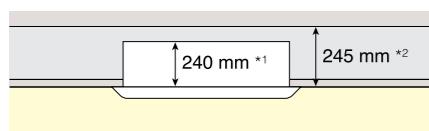


*1 298 mm high with 100K-140K
*2 303 mm high with 100K-140K

Easy height adjustment

Each corner of the unit has an Adjuster Pocket that lets you easily adjust the unit's suspended height.




Note: If the wireless remote control option is installed, a light receptor unit is housed in one of the adjuster pockets.

**All models suspended
without lift****Installable in any direction**

Since the orientation of the intake grill can be adjusted after installing, the direction of the intake grill lines can be unified when multiple units are installed.

**Easy installation for options**


The high-performance filter and other options are easily clipped into place. There is no need for a screwdriver.

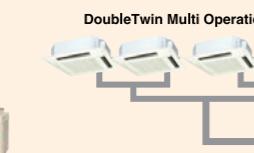**Supports simultaneous running of the twin,
triple, and double twin multi operation.**

See pages 31-32 for details of the Multi Series.

Easier to maintain**Stepping motor controls flaps
to prevent soiled ceilings**

Dust can be kept from blowing onto ceilings by directly setting flaps by hand or by remote control.

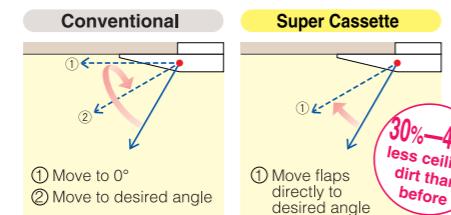**Heat exchanger cleaning
required only once every 3 years**

The new long-life filter is 20% more efficient than the previous one. This has enabled further reductions in running costs by extending the heat-exchanger cleaning interval by once every two years to once every three years.

**Less cleaning work
thanks to "Non-dew Flaps"
with non-flocking**


The use of non-flocking flaps minimises adhering dust, so less cleaning work is needed.

**Self-diagnosis function****Low gas pressure detection**

Insufficient gas charging is normally hard to detect. During post-installation trials and regular inspection procedures, the refrigerant level is monitored by microprocessor to maintain proper gas pressure.

Options required for specific operating environments**Ultra long-life filter**

Even in smoky environments where the air conditioning is on most of the time, the ultra long-life filter only has to be changed once a year.

**Smoky atmosphere: annual filter change**


*For dust concentration of 0.3 mg/m³ (Requires separately sold Air Cleaner.)
1 year (Approx. 5,000 hr) \div 15 hr/day \times 28 day/month \times 12 monthly/year

Ordinary store or office: filter change every 4 years

*For dust concentration of 0.15 mg/m³
4 years (Approx. 10,000 hr) \div 8 hr/day \times 25 day/month \times 4 years

High-efficiency filter


Available in two types: 65% and 90% colorimetry.

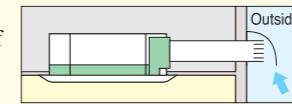**Fresh air intake kit**

Using this kit, a duct can be fitted to increase the intake of outdoor air.

Panel spacer

Use when only minimal space is available between drop ceilings and ceiling slabs.

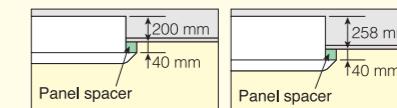

Note: Some ceiling constructions may hinder installation. Contact your Daikin Dealer before installing your unit.

Sealing member for air discharge outlet

Sealing members block air discharge openings not used in 2-way or 3-way blow.

Branch duct chamber

This chamber lets you connect a round flexible duct to the air discharge opening at any time after the original installation.


Note: *Connecting ducts, insect nets, fire dampers, air filters, and other parts should, as required, be procured locally.

**Outside Air fan interlocked with air conditioning unit is necessary. Optional PCB(KRP1C63) is required for interlocking.


***It is recommended that the volume of outdoor air introduced through the kit is limited to 10% of the maximum airflow rate of the indoor unit. Introducing higher quantities will increase the operating noise and may also influence temperature sending.

The units can be installed in the following different ways.


Chamber type (without T-joint pipe and fan)
Kit name: **KDDP55D160**

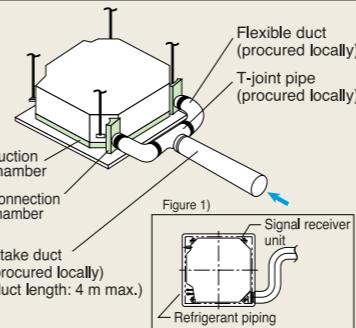

Chamber type (with T-joint pipe and without fan)
Kit name: **KDDP55D160K**

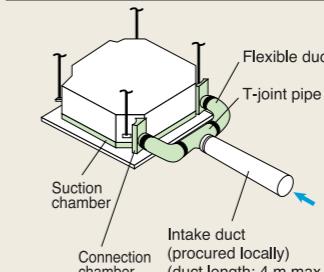

Direct installation type
Kit name: **KDDJ55X160**

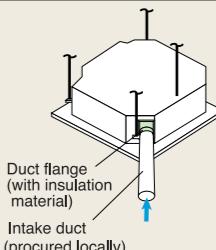

Notes: Requires an inspection port for maintenance access.
If intake ducts cannot be connected to both connection chambers due, for example, to an obstruction, single intake duct installation is possible.
Figure 1 shows what the installation will look like when the signal receiver unit for the wireless remote controller is installed.

Note: Use of options will increase operating sound.

Features (Features are explained on P. 37-38.)

Feature	Comfort								Mould prevention	Work & Servicing				Control features	Option	Others											
	Auto swing	Swing pattern selection	Draft prevention function	Switchable fan speed	Programme "Dry"	High ceiling application	Two selectable temperature-sensors	Hot start		Timer selector	Mould resistant treatment for filter	Drain pump mechanism	Pre charged for up to 30 m	Longlife filter	Filter sign	Ceiling sealing prevention	Low gas pressure detection	Emergency operation	Self-diagnosis function	Auto-restart	Auto-cooling/heating change-over	Control by 2 remote controllers	Control by 1 remote controller	External command control	Central remote control	Interlock control	
Model																											
Cooling only	●	●	—	●	●	●	●	*1	—	*2	●	●	●	*4	●	●	●	●	●	●	●	●	●	●	●	●	
Heat pump	●	●	●	●	●	●	●	*1	●	*3	●	●	●	*4	●	●	●	●	●	●	●	●	●	●	●	●	●

*Applicable when wired remote controller is used.

**Applicable to R71LU-R140LU outdoor units (for temp. down to -15°C) (An option is required.)

***Applicable to RY71LU-RY140LU outdoor units (for temp. down to -5°C) and RY200LU-RY250LU outdoor units (for temp. down to 0°C)

****Applicable to R(Y)71LU-140LU outdoor units

CEILING SUSPENDED TYPE FH(Y)

Cooling only FH(Y)35BVE-125BVE
Heat pump FHY35BVE-125BVE

Upgrade to a quiet and compact system.



Sound level
39/35dB(A)
High Low
FHY71B




Accessory required for indoor unit (option)	
Wired LCD remote controller	Wireless LCD remote controller
BRG1C61 Note: Remote controller cable not included. Cables must be procured locally.	<p>A signal receiver must be added to the indoor unit.</p> <p>Signal receiver unit (Installed type)</p> <p>Cooling only BRC7EA66 Heat pump BRC7E63W</p> <p>Wireless remote controller and signal receiver unit are sold as a set.</p>

Spreads comfortable air throughout the room

Auto-swing for comfort in all directions

Wide air discharge openings produce a spreading 100° airflow

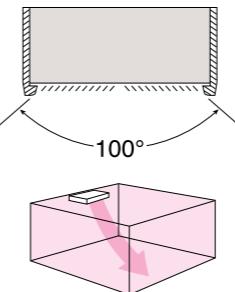

Installable on ceilings 3.5 m high

Installation flexibility for freedom of design

Uniform height and depth. Compact design for small-capacity models to meet tighter dimensional constraints.


	Indoor unit	35B/50B	60B/71B	100B	125B
Height			195		
Width		960	1,160	1,400	1,590
Depth				680	

Weight of all models reduced (down 10% compared with previous models). Transfer and installation work is less arduous.

Reduced edge space, more flexible installation

The unit fits more snugly into tight spaces.

For 71B indoor unit
Dimensions in brackets are for previous model.

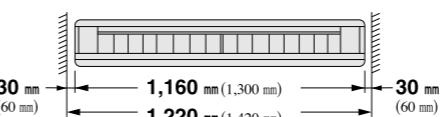

*Water used in the test-run can now be drained from the air discharge opening rather than from the side as was formerly the case.

Low gas pressure detection

Supports simultaneous running of the twin, triple and double twin multi operation.



Features (Features are explained on P. 37-38.)

Feature	Comfort						Mould prevention	Work & Servicing			Control features	Others							
	Auto swing	Draft prevention function	Switchable fan speed	Programme "Dry"	High ceiling application*	Two selectable temperature-sensors applicable		Hot start	Year-round cooling applicable	Timer selector	Mould-resistant treatment for filter	Mould-proofing drain pan	Drain pump mechanism	Pre charged for up to 30 m	Long-life filter	Filter sign	Low gas pressure detection	Emergency operation	Self-diagnosis function
Model	●	—	●	●	●	●	—	—	—	●	●	●	—	●	●	●	●	●	●
Cooling only	●	—	●	●	●	●	—	—	—	●	●	●	—	●	●	●	●	●	●
Heat pump	●	●	●	●	●	●	—	—	—	●	●	●	—	●	●	●	●	●	●

*Installable on max. 3.5 m high ceiling

*Applicable when wired remote controller is used

*³Applicable to R71LU-R140LU outdoor units (for temp. down to -15°C)

(An option is required.)

*⁴Applicable to RY71LU-RY140LU outdoor units (for temp. down to -5°C) and RY200LU-RY250LU outdoor units (for temp. down to -0°C)

*⁵Optional available

*⁶Applicable to R(Y)71LU-140LU outdoor units

Quiet operation


Sound operation has been reduced on the exposed ceiling suspended type unit.

(dB(A))

Indoor unit	High	Low
35B	37	32
50B	38	33
60B	38	33
71B	39	35
100B	42	37
125B	44	39

Note : Anechoic chamber conversion value, measured according to JIS parameters and criteria.

Uses quiet stream fan and other quiet technologies.

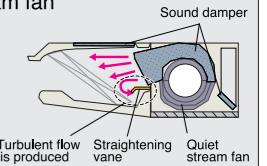

Easier to maintain

Long-life filter lasts about 1 year * Maintenance not required

* For dust concentration of 0.15 mg/m³

■ Two time settings (2500 hrs and 1250 hrs) are available to match the installation environment. Maintenance time warning is displayed on the remote controller (filter sign).

Non-dew flap without bristles

Absence of bristles minimises clinging dirt and simplifies cleaning.



Easy-clean, flat surfaces

It is easy to wipe dirt off the flat side and lower surfaces of the unit.

For all maintenance tasks, access is from bottom surface.

Improved-oil resistant grille

Oil-resistant plastic is used for the air discharge grille. This improves durability in restaurants and other similar environments.

Note: Intended for use in salons, dining rooms, and ordinary sales floors, this specification is not suitable for kitchens or other harsh environments.

CEILING SUSPENDED CASSETTE TYPE FUY

Cooling only FUY71FJV1–125FJV1
Heat pump FUY71FJV1–125FJV1

Flexibility in installation location.
Installation is also simple.






Sound level
40/35 dB(A)
High Low
FUY71FJ



Accessory required for indoor unit (option)	
Wired LCD remote controller	Wireless LCD remote controller
 BRC1C61 Note: Remote controller cable not included. Cables must be procured locally.	 A signal receiver must be added to the indoor unit.  Signal receiver unit (Installed type)  Cooling only BRC7C529W Heat pump BRC7C528W Wireless remote controller and signal receiver unit are sold as a set.

The auto-swing function increases comfort level


Auto-swing	5-levels air direction setting	Auto-air direction control
 Auto-swing between 0° and 60°	 Settable to 5 different levels between 0° and 60°	 The air direction is set automatically to the memorised position of the previous air direction. (Initial setting is 60° for heating and 30° for cooling.)
Draft prevention (in heating)		At heating startup and thermo OFF*, air direction is automatically set to horizontal to prevent direct exposure to cool air drafts.

*When the thermostat turns off.

Air direction can be selected according to installation

■ Selection patterns for air direction and fan speed ratio

Note: Applicable only to the flow configurations shown below.

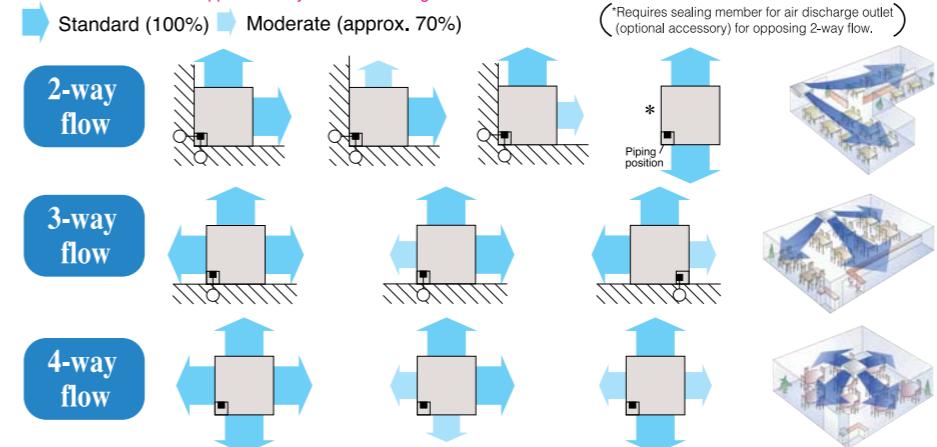

Through use of a high-static-pressure vane and a thorough reduction in flow loss in the path between internal fan suction and air output, we have achieved a thinner fan unit and quiet operation while maintaining airflow.

Indoor unit	High	Low
71FJ	40	35
100FJ	43	38
125FJ	44	39


Note: Anechoic chamber conversion value, measured according to JIS parameters and criteria.

Quick and easy to install


Simple installation procedure

Simply lock the body in place with suspension bolts to install.

Adjustment is smooth and simple,




Drain pump is equipped as standard accessory with 500 mm lift.



Installable in any direction

Since the orientation of the intake grill can be adjusted after installing, the direction of the intake grill lines can be unified when multiple units are installed.

Note: The panel cannot be turned when the wireless remote controller is in use.



Suitable for high ceilings

■ Criteria for ceiling height and number of air discharge outlets

Ceiling height	Standard	Number of air discharge outlets used		
		2-way flow	3-way flow	4-way flow
High ceiling ①	3.5 m	3.0 m	2.7 m	
High ceiling ②	3.8 m	3.3 m	3.0 m	
	—	3.5 m	3.5 m	

Note: Initial settings are for standard ceiling height and 4-way flow. High ceiling settings ① and ② are set from the remote controller.

Programme "Dry"

Dehumidification is microprocessor controlled to prevent abrupt and uncomfortable changes in air temperature.

Two selectable temperature-sensors

Both indoor unit and wired remote controller (option) contain temperature-sensors. Temperature sensing can be set at the unit or, to further improve comfort level, closer to the target area at the wired remote control.

*Temperature-sensor on indoor unit must be used when the air conditioner is controlled from another room.

**Wireless remote controller does not have a temperature-sensor.

Switchable fan speed: High/Low

Easier to maintain

Long-life filter lasts about 1 year* Maintenance not required

*For dust concentration of 0.15 mg/m³

Accessible from below for easy maintenance

Low gas pressure detection

Features (Features are explained on P. 37–38.)

Feature	Auto-swing	Swing pattern selection	Draft prevention function	Switchable fan speed	Programme "Dry"	High ceiling application	Two selectable temperature-sensors	Year-round cooling applicable	Hot start	Timer selector	Mould resistant treatment	Mould-proofing drain pan	Drain pump mechanism	Pre charged for up to 30 m	Long-life filter	Filter sign	Low gas pressure detection	Emergency operation	Self-diagnosis function	Control features	Others
Model																					
Cooling only	●	●	—	●	●	●	*1	—	*2	●	●	●	●	*4	●	●	*4	●	●	●	
Heat pump	●	●	●	●	●	●	*1	●	*3	●	●	●	●	*4	●	●	*4	●	●	●	

*1Applicable when wired remote controller is used

*2Applicable to R71LU–125LU outdoor units (for temp. down to -15°C)

(An option is required.)

*3Applicable to RY71LU–125LU outdoor units (for temp. down to -5°C)

*4Applicable to R(Y)71LU–125LU outdoor units

CEILING MOUNTED CASSETTE CORNER TYPE FH(Y)K

Cooling only FH(Y)K35FV1-71F(J)V1
Heat pump FH(Y)K35FJV1-71FJV1

Sound level
41/36dB(A)
High Low
HYK71FJ



**Fits in ceiling corners.
Equipped for versatile
airflow control.**

Accessory required for indoor unit
(option)

Wired LCD remote controller



Note: Remote controller cable not included.
Cables must be procured locally.



Multiple airflow variations for stepped or 3.8 m high ceilings


Airflow variation	① Downward flow	② Downward flow + Forward flow	③ Forward flow
Auto-swing	○	○	—
High ceiling installation	○	○	—
Required options	—	—	Air discharge grille, flexible duct

■ Panel spacers (option) can be installed with all three airflow variations.


■ Decoration panels (option) to hide the downward air discharge opening can be installed with variation ③ above.

Example installations


In the corner of a room
(downward flow)




■ Wind speed profile
● Heating (65° downward flow ... Standard installation)

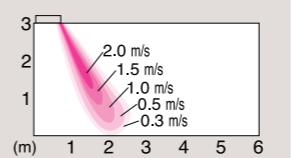


Comfortable cooling from
ceiling to floor
(downward flow)




■ Wind speed profile
● Heating (65° downward flow from high ceiling)

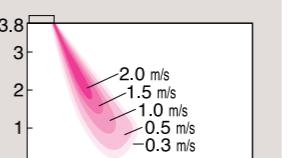

On stepped ceiling
(outward +
downward flow)



On stepped ceilings, downward flow
can be blocked and outward flow alone
can be used to cool or heat the space.

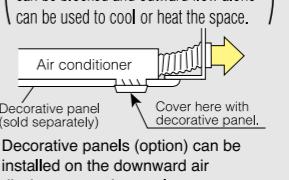

Optimal comfort and convenience assured by three air discharge modes

Air direction	Draft prevention setting	Standard setting	Setting to prevent soiling of ceiling
Desired situation	When drafts are unwanted	For gentle drafts (Ceiling is soiled.)	When ceilings must be kept spotless
Auto-swing	Auto-swing between 0° and 65°	Auto-swing between 0° and 65°	Auto-swing between 0° and 65°
5-levels air direction setting	Settable to 5 different levels between 0° and 65°	Settable to 5 different levels between 30° and 65°	Settable to 5 different levels between 40° and 65°
Draft prevention (In heating) model	At heating startup and thermo OFF*, air discharge is automatically set to a near horizontal 10° to prevent direct exposure to cool air drafts.	—	—
Auto air direction control	—	The air direction is set automatically to the memorised position of the previous air direction. (Initial setting is 65° for heating and 30° for cooling.)	—

Note: Air direction is set to the standard position when the unit is shipped from the factory.

The position can be changed from the remote controller.

*When the thermostat turns off.

Programme "Dry"

Dehumidification is microprocessor controlled to prevent
abrupt and uncomfortable changes in air temperature.

Features (Features are explained on P. 37-38.)

Feature	Comfort							Mould prevention	Work & Servicing				Control features			Others	
	Auto swing	Swing pattern selection	Draft prevention function	Switchable fan speed	Programme "Dry"	High ceiling application	Hot start		Mould resistant treatment for filter	Drain pump mechanism	Pre charged for up to 30 m	Long-life filter	Filter sign	Ceiling soiling prevention	Low gas pressure detection	Emergency operation	
Model	●	●	—	●	●	●	—	*1	●	●	●	*3	●	●	*3	●	●
Cooling only	●	●	—	●	●	●	—	*1	●	●	●	*3	●	●	*3	●	●
Heat pump	●	●	●	●	●	●	●	*2	●	●	●	*3	●	●	*3	●	●

*1Applicable to R71LU outdoor units (for temp. down to -15°C) (An option is required.)

*2Applicable to RY71LU outdoor units (for temp. down to -5°C)

*3Applicable to R(Y)71LU outdoor units


Quiet operation

Indoor unit	High	Low
35F(J)	39	33
45F(J)	39	34
60F(J)	41	36
71F(J)	41	36

Note : Anechoic chamber conversion value, measured according to JIS parameters and criteria.

Easier to install and service

Drain pump is equipped as standard accessory with 500 mm lift.

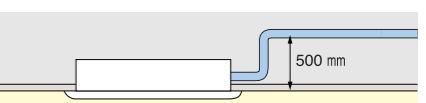


Long-life filter lasts about 1 year *
Maintenance not required

* For dust concentration of 0.15 mg/m³

Low gas pressure detection

Fresh air intake possible
(Site installation required)


A duct can be connected to the rear of the indoor unit to draw in outdoor air.

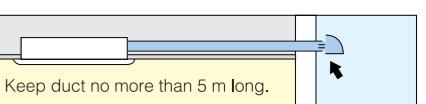

Note: The maximum duct length for connection to the fresh air intake kit is 5 m. Connecting ducts, insect nets, fire dampers, air filters, and other parts should, as required, be procured locally.

Panel spacer (option)

Use when only minimal space is available between drop ceilings and ceiling slabs.

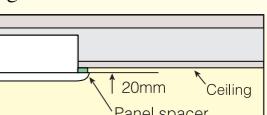

Upgrade options for easy installation on stepped ceilings



For outward blow, detach the punch-out panel from the duct-connection port on the front of the unit.

CEILING MOUNTED BUILT-IN TYPE

FH(Y)B

Cooling only FH(Y)B35FV1–125FV1
Heat pump FHYB35FV1–125FV1

Clever and compact
mini ducted unit provides
comfort and flexibility.



Sound level
41/35 dB(A)
High Low
FHYB71F



Accessory required for indoor unit
(option)

Wired LCD remote controller




Note: Remote controller cable not included.
Cables must be procured locally.

BRC1C61

Flexibly adapts to shop interiors

To cope with the challenges of L-shaped or U-shaped spaces, it is possible to install the air discharge unit away from the main unit. At the same time, different types of architectural space can be kept

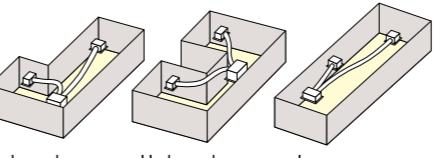

Programme "Dry"

Dehumidification is microprocessor controlled to prevent abrupt and uncomfortable changes in air

Switchable fan speed: High/Low

Quiet operation

Indoor unit	High	Low
35F	38	32
45F	39	34
60F	41	35
71F	41	35
100F	41	35
125F	44	38

Note: Anechoic chamber conversion value, measured according to JIS parameters and criteria.

Easier to maintain

Long-life filter lasts about 1 year *

Maintenance not required

* For dust concentration of 0.15 mg/m³

Low gas pressure detection

Insufficient gas charging is normally hard to detect. During post-installation trials and regular inspection procedures, the refrigerant level is monitored by microprocessor to maintain proper gas pressure.

Features (Features are explained on P. 37–38.)

Feature	Comfort				Mould prevention	Work & Servicing				Control features				Option	Others						
	Switchable fan speed	Programme "Dry"	Hot start	Year-round cooling applicable		Mould resistant treatment for filter	Drain pump mechanism	Pre charged for up to 30 m	Long-life filter	Filter sign	Low gas pressure detection	Emergency operation	Self-diagnosis function	Auto-restart	Auto-cooling/heating change-over	Control by 2 remote controllers	Control by 1 remote controller	External command control	Central remote control	Interlock control	High-efficiency filter
Cooling only	●	●	—	* ¹	●	●	●	●	* ³	●	●	* ³	●	●	●	—	●	●	●	●	●
Heat pump	●	●	●	* ²	●	●	●	●	* ³	●	●	* ³	●	●	●	●	●	●	●	●	●

*¹Applicable to R71LU-R125LU outdoor units (for temp. down to -15°C) (An option is required.)

*²Applicable to RY71LU-RY125LU outdoor units (for temp. down to -5°C)


*³Applicable to R(Y)71LU-125LU outdoor units

Meets diverse of installation needs


The indoor unit can be installed in rooms with as little as 350 mm between the drop ceiling and ceiling slab. It also works with both flexible and ordinary ducts.

Standard installation examples


In crawl space

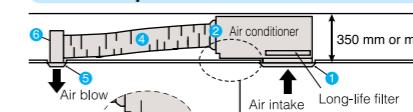


With canvas bellows and air intake panel (sold separately)

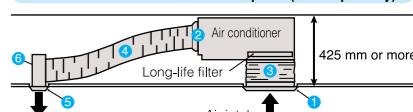


With high-efficiency filter

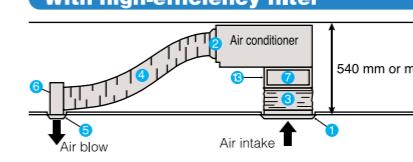


Ceiling return

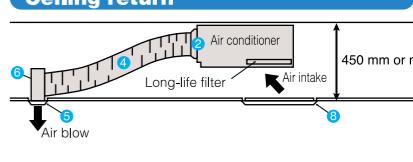

Ceiling return with high-efficiency filter

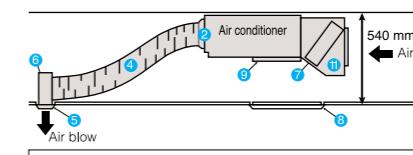

With ordinary ducts

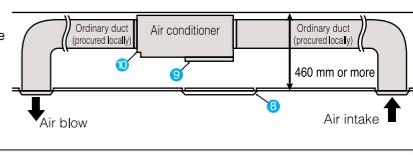


Options

- ① Decorative panel
- ② Air discharge opening adapter
- ③ Canvas bellows and air intake panel

- ④ Flexible duct
- ⑤ Air discharge grille
- ⑥ Air discharge chamber
- ⑦ High-performance filter
- ⑧ Inspection panel
- ⑨ Rear intake blocking pad
- ⑩ Air discharge opening flange
- ⑪ Rear intake filter chamber
- ⑫ Branch duct
- ⑬ Low-draft filter chamber

Drain pump is equipped as standard accessory with 250 mm lift.

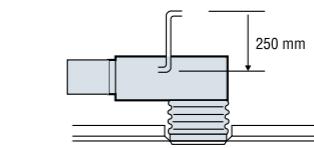

External static pressure can be set depending on duct length, presence of high-efficiency filter, and other installation conditions.

External static pressure pattern (Pa)

Indoor unit	High	Standard	Low
35F–71F	78	39	20
100F and 125F	98	39	—


External static pressure is set to standard when the unit is shipped from the factory.

A duct can be connected to the rear of the indoor unit to draw in outdoor air.
Note: The maximum duct length for connection to the fresh air intake kit is 5 m. Connecting ducts, insect nets, fire dampers, air filters, and other parts should, as required, be procured locally.

High-efficiency filter (option)

Available in two types: 65% and 90% colorimetry. This filter easily meets dust collection efficiency regulations specified in building codes.

Options have also been upgraded to make installation even easier.

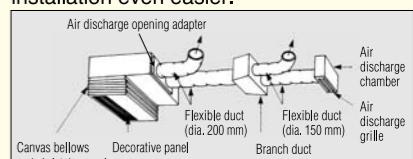

WALL MOUNTED TYPE

FAY

Cooling only FAY71LVE / FAY100FAVE
Heat pump FAY71LVE / FAY100FAVE

Made more compact,
stylish, and quieter



Sound level
43/37 dB(A)
High Low
FAY71L

Sound level
45/41 dB(A)
High Low
FAY100FA



FAY100FAVE


Accessory required for indoor unit (option)

Wired LCD remote controller



Note: Remote controller cable not included. Cables must be procured locally.

Wireless LCD remote controller

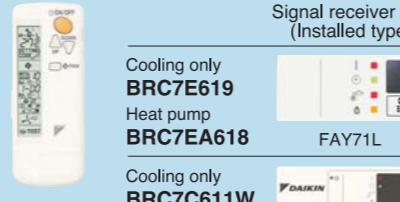

A signal receiver must be added to the indoor unit.
Signal receiver unit (Installed type)

Cooling only
BRC7E619
Heat pump
BRC7EA618
FAY71L


Cooling only
BRC7C611W
Heat pump
BRC7C610W
FAY100F

Wireless remote controller and signal receiver unit are sold as a set.

Below features only apply to FAY71L.

Drastic size reduction


Reduced size (by 22% in volume, 32% in installation area) makes installation possible in a very limited space.

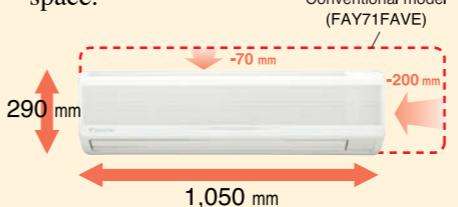

Conventional model (FAY71FAVE)


Improved airflow modes realise comfortable air distribution across the entire room

Auto-swing




Auto-swing from 10° to 70°

5-level air direction setting

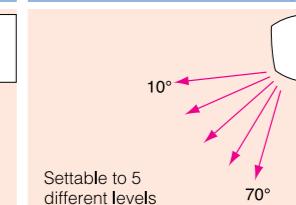


Settable to 5 different levels between 10° to 70°

Auto-air direction control

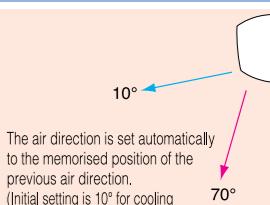

The air direction is set automatically to the memorised position of the previous air direction. (Initial setting is 10° for cooling and 70° for heating.)

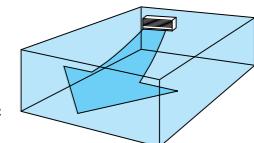

Comfort even on the far side of the room

To carry air to the far side of long rooms, extra-high airflow adds 10% more fan speed the "high" setting. Air discharge strength is selected from the remote controller.

Sophisticated extension design

Compact and stylish design that does not detract from the decor of the room.

Flap is closed when not operating



Easier to install and service

Light weight

Reduced weight by 8kg greatly facilitates installation.

Conventional (FAY71FAVE)	New model (FAY71LVE)
21 Kg	13 Kg

Drain pump kit is available as option.

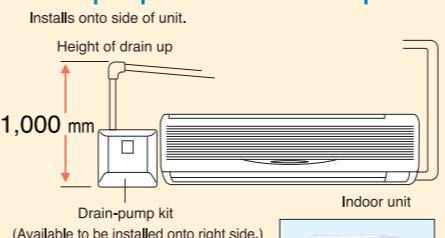

Drain pan and air filter can be kept clean by mould-proof polystyrene

Removable and washable grille

DIII-NET connection is standard specification. Adapter is not required.



Features (Features are explained on P. 37-38.)

Feature	Comfort							Mould prevention	Work & Servicing			Control features			Others		
	Auto swing	Draft prevention function	Switchable fan speed	Programme "Dry"	High fan speed mode	Two selectable temperature-sensors	Upward		Hot start	Year-round cooling applicable	Timer selector	Drain pump mechanism	Pre charged for up to 30 m	Filter sign	Low gas pressure detection	Emergency operation	Self-diagnosis function
Model																	
Cooling only	●	—	●	●	●	●	●	●	—	●	●	●	●	●	●	●	●
Heat pump	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

*1Applicable when wired remote controller is used

*2Applicable to R71LU/R100LU outdoor units (for temp. down to -15°C) (An option is required.)

*3Applicable to RY71LU/RY100LU outdoor units (for temp. down to -5°C)

*4Applicable to R(Y)71LU/100LU outdoor units

FLOOR STANDING TYPE FVY

Cooling only FVY71LAVE–125LAVE
Heat pump FVY71LAVE–125LAVE

The floor-standing configuration means the FVY is easy to install and maintain. It can also be installed under high ceilings.



LCD control panel is standard



Note: This remote controller has a temperature-sensor.

Sound level
41/35 dB(A)
High Low
FVY71LA



Quiet operation


Indoor unit	High	Low
71LA	41	35
100LA	46	40
125LA	49	43

Note : Anechoic chamber conversion value, measured according to JIS parameters and criteria.


Auto-swing delivers comfort to every corner of the room

FVY units have swinging louver spreads comfortable airflow. Any uncomfortable sensation of sudden change is avoided by a slow cycle of 2 to 3 full swings per minute.

Auto-swing

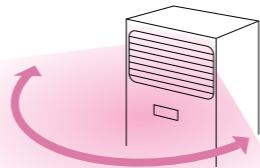

Manual setting of vertical airflow louvers

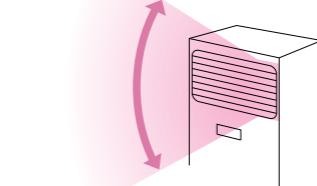

Manual setting of vertical airflow louvers

Vertical airflow adjustment is possible when (changing between cooling and heating or) to match interior spaces and partitions.

A good choice for spaces with ceilings so high that heating by ceiling-mounted units is inefficient.

Note: For optimal installation, space factors should be accurately calculated.

Programme "Dry"

Dehumidification is microprocessor controlled to prevent abrupt and uncomfortable changes in air

Switchable fan speed: High/Low

Easy-to-operate, handy LCD control panel

The LCD displays text, numbers and graphics to indicate the temperature setting, timer setting, auto-swing, fan speed, and more. Furthermore, the LCD panel can be detached and used as a remote controller, so air conditioning can be controlled from another room or from the cash register.

(Remote controller cable not included. Cables must be procured locally.)

Two selectable temperature-sensors

Temperature-sensors on both indoor unit and wired remote controller.

Temperature sensing can be set closer to the target area to further improve comfort level.

*Temperature-sensor on indoor unit must be used when the air conditioner is controlled from another room.

**Wireless remote controller does not have a temperature-sensor.

Features (Features are explained on P. 37–38.)

Feature	Comfort					Mould prevention	Work & Servicing			Control features			Others								
	Auto swing	Switchable fan speed	Programme "Dry"	Hot start	Two selectable temperature-sensors applicable		Mould resistant treatment for filter	Pre charged for up to 30 m	Long-life filter	Filter sign	Low gas pressure detection	Emergency operation	Self-diagnosis function	Auto-restart	Auto-cooling/heating change-over	Control by 2 remote controllers	Control by 1 remote controller	External command control	Central remote control	Interlock control	PE fin
Model																					
Cooling only	●	●	●	—	●	*1	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Heat pump	●	●	●	●	●	*2	●	●	●	●	●	●	●	●	●	●	●	●	●	●	

*Applicable to R71LU–R125LU outdoor units (for temp. down to -15°C) (An option is required.)

**Applicable to RY71LU–RY125LU outdoor units (for temp. down to -5°C)

***Applicable to R(Y)71LU–125LU outdoor units

Easier to install and service

Lightweight

The unit can be easily transported and installed.

Indoor unit	Weight	
	Conventional FVY-F	New model
71 class	45 kg	39 kg
100 class	63 kg	46 kg
125 class	67 kg	47 kg

Long-life filter lasts about 1 year *

Maintenance not required

*For dust concentration of 0.15 mg/m^3

Filter exchange interval



Low gas pressure detection

Insufficient gas charging is normally hard to detect. During post-installation trials and regular inspection procedures, the refrigerant level is monitored by microprocessor to maintain proper gas pressure.

DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE

FDMG/FDYM

Cooling only FDMG71AV1–180AV1
FDYM03FAV1–06FAV1
Heat pump FDYM03FAV1–06FAV1

**Unit can be mounted
in the ceiling and air can be
delivered freely by duct.**



Sound level
39 dB(A)
High
FDYM03FA
(220V)



Accessory required for indoor unit (option)

For FDYM

Wired LCD remote controller



Note: Remote controller cable not included. Cables must be procured locally.

Wireless LCD remote controller



Signal receiver unit (Separate type)
Cooling only BRC4C64
Heat pump BRC4C62
Wireless remote controller and signal receiver unit are sold as a set.

For FDMG

Digital remote controller



KRC47-2A
KRC47-4A

Remote controller




Freedom of layout

The duct system allows the efficient location of discharge outlets in accordance with the room layout

Middle static pressure type is available in a larger than standard space

Duct connection is simpler with standard rear intake chambers

Compact, 295 mm high design makes installation possible where the ceiling space is limited (For FDYM)

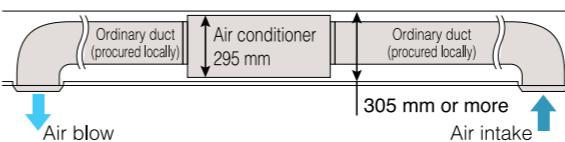

Quiet operation

dB(A) (220V)

Indoor unit	High	Low
FDMG71A	42	38
FDMG100A	44	36
FDMG125A	45	37
FDMG140A	46	36
FDMG180A	47	37
FDYM03FA	39	
FDYM04FA	39	
FDYM05FA	44	
FDYM06FA	46	

Note : Anechoic chamber conversion value, measured according to JIS parameters and criteria.

Switchable fan speed: High/Low

Programme "Dry"

Dehumidification is microprocessor controlled to prevent abrupt and uncomfortable changes in air temperature.

Low gas pressure detection

Insufficient gas charging is normally hard to detect. During post-installation trials and regular inspection procedures, the refrigerant level is monitored by microprocessor to maintain proper gas pressure.


Supports simultaneous running of the twin and triple multi operations.



See pages 31–32 for details of the Multi Series.

Simultaneous air conditioning of two rooms and ventilation grille (ventilation opening)

When air conditioning two rooms simultaneously, the air discharged into each room must be circulated back to the air conditioner. To achieve this, a ventilation duct should be installed for each room or one of the indicated ventilation grilles should be installed on the partitioning wall or under the door between the rooms.

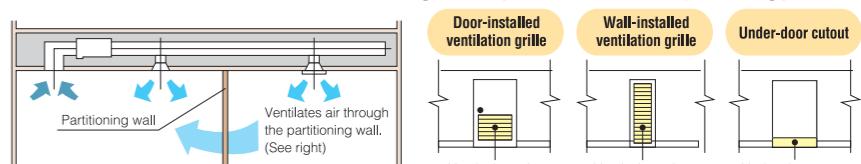

Note: The under-door cutout method should be used only when there is a small volume of airflow.

Features (Features are explained on P. 37–38.)

Feature	Model	Comfort					Work & Servicing			Control features			Others							
		Switchable fan speed	Programme "Dry"	Hot start	Automatic cool/heat change-over	Year-round cooling applicable	Timer selector	Pre charged for up to 30 m	Low gas pressure detection	Emergency operation	Self-diagnosis function	Auto-restart	Control by 2 remote controllers	Group control by 1 remote controller	External command control	Central remote control	Interlock control	Twin and triple multi operation	PE fin	Adjustable external static pressure
Cooling only	FDMG	●	—	—	—	—	—	—	—	—	●	—	—	—	—	—	—	●	—	
	FDYM	●	●	—	—	*1	●	*3	*3	●	●	●	●	●	●	●	●	●	●	●
Heat pump		●	●	●	●	*2	●	*3	*3	●	●	●	●	●	●	●	●	●	●	●

*1Applicable to R71LU–R140LU outdoor units (for temp. down to -15°C) (An option is required.)

*2Applicable to RY71LU–RY140LU outdoor units (for temp. down to -5°C) and RY200LU–RY250LU outdoor units (for temp. down to -0°C)

*3Applicable to R(Y)71LU–140LU outdoor units

DUCT CONNECTION LOW STATIC PRESSURE TYPE **FDBG/FDYB**

Cooling only **FDBG25AVE-71AVE**
Heat pump **FDYB35KAVE-71KAVE**



- Ideal for quiet, beautiful living spaces
- Suitable for condominiums and apartments, houses and hotels

Quiet operation


Indoor unit	High	Low
FDBG60AVE	42	39

Note : Anechoic chamber conversion value, measured according to JIS parameters and criteria.

Durable

To achieve increased durability by improved resistance to salt corrosion and atmospheric pollution, coated PE fins (with special acryl pretreatment) are used for the heat exchanger of the outdoor unit.

Supports simultaneous running of the triple and double twin multi operations.

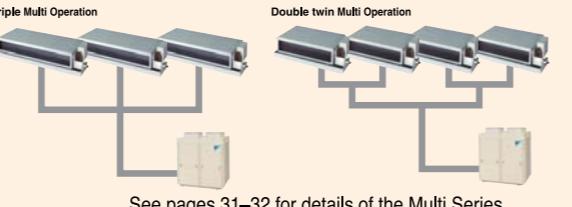

Features (Features are explained on P. 37-38.)

Feature	Comfort			Work & Servicing	Control features		Others
	Switchable fan speed	Programme "Dry"	Hot start		Automatic cool/heat change-over	Year-round cooling applicable	
Model	●	—	—	—	—	—	—
Cooling only	●	—	—	—	—	—	—
Heat pump	●	●	●	●	*1	●	*2

*1Applicable to RY71LU outdoor units (for temp. down to -5°C) and RY200LU-RY250LU outdoor units (for temp. down to 0°C)
*2Applicable to RY71LU outdoor units

Sound level
38 dB(A)
LOW
FDYB50KA
(220V)



Accessory required for indoor unit (option)

Cooling only
Digital remote controller



KRC47-2A
KRC47-4A

Remote controller



Heat pump
Wired LCD remote controller



BRC1C61

Note: Remote controller cable not included. Cables must be procured locally.

Wireless LCD remote controller



BRC4C62

Signal receiver unit (Separate type)
Wireless remote controller and signal receiver unit are sold as a set.

DUCT CONNECTION HIGH STATIC PRESSURE TYPE **FD(Y)**

Cooling only **FD03KY1-20KY1**
Heat pump **FDY06KAY1-20KAY1**



Sound level
51 dB(A)
High
FDY06KA



Accessory required for indoor unit (option)

Cooling only

Remote controller



Heat pump

Wired LCD remote controller



BRC1C61

Note: Remote controller cable not included. Cables must be procured locally.

Wireless LCD remote controller



BRC4C62

Signal receiver unit (Separate type)
Wireless remote controller and signal receiver unit are sold as a set.

- Recommended for spacious and large-volume areas because of its flexible installation
- Suitable for large stores, factories, and other large areas, and for use with housing ducts in homes

Quiet operation

Durable

Highly durable outdoor unit has PE fins for improved resistance to salt corrosion and atmospheric pollution.

Features (Features are explained on P. 37-38.)

Model	Feature		Comfort		Work & Servicing		Control features		Others	
	Hot start	Automatic cool/heat change-over	Year-round cooling applicable	Timer selector	Pre-charged for up to 30 m	Low gas pressure detection	Emergency operation	Self-diagnosis function	Auto-restart	Control by 2 remote controllers
Cooling only	—	—	—	—	—	—	—	—	●	—
Heat pump	●	*4	*1	●	*2	*2	●	●	●	*4

*1Applicable to RY140LU outdoor units (for temp. down to -5°C) and RY200LU-RY250LU outdoor units (for temp. down to 0°C)

*2Applicable to R(Y)140LU outdoor units

*3Required to change the pulley

*4FDY06-10 only


Central control

Many options are available for use with large-scale and advanced-function centrally controlled systems

Guide
Line up P. 3-4, 7-8
Outdoor units P. 33-34
Remote controllers P. 35-36
Standard specifications P. 44, 45, 53
Options P. 59
Outer dimension drawings P. 65-67

Simultaneous air conditioning of two rooms and ventilation grille (ventilation opening)

When air conditioning two rooms simultaneously, the air discharged into each room must be circulated back to the air conditioner. To achieve this, a ventilation duct should be installed for each room or one of the indicate ventilation grilles should be installed on the partitioning wall or under the door between the rooms.

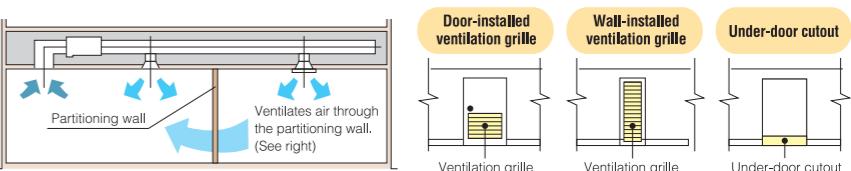


Note: The under-door cutout method should be used only when there is a small volume of airflow.

Simultaneous operation system
MULTI SERIES

Twin, Triple, and Double Twin Multi-Operation

**Simultaneously operates
2 to 4 indoor units using
a single outdoor unit.**

In large interior spaces a single indoor unit may not be able to provide uniform comfort. Installation of 2 to 4 units, can provide an effective solution.

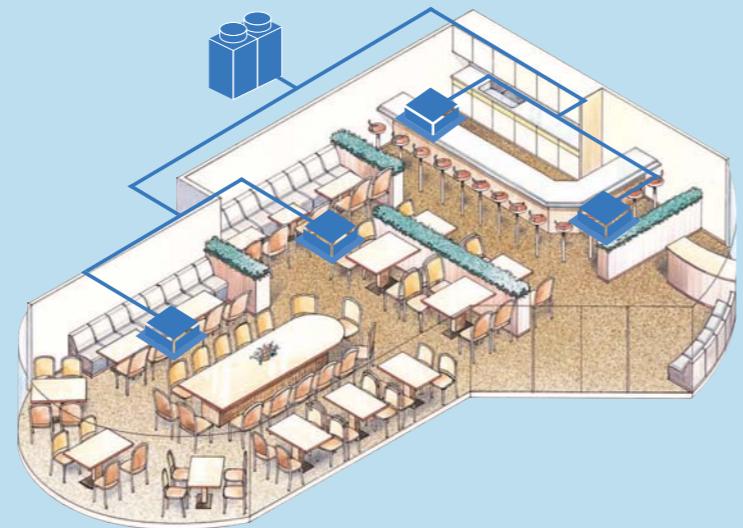

In a single-floor restaurant, for example, positioning 4 units at strategic locations realises comfortable airflow that reaches every inch of the room.

Note: This type of system does not allow individual control or independent operation of indoor units. It is not the best choice for large rooms with partitions.


Installing multiple units is economical and realises comfort

- Lower cost of installation than for individual pair type
- Reduced installation space for outdoor units
- Enhanced comfort from distributed indoor units

Indoor units include ceiling mounted cassette type, ceiling suspended type, and duct connection middle and low static pressure type.


Double Twin Multi operation

**4 indoor units can be run simultaneously
with a single outdoor unit.**

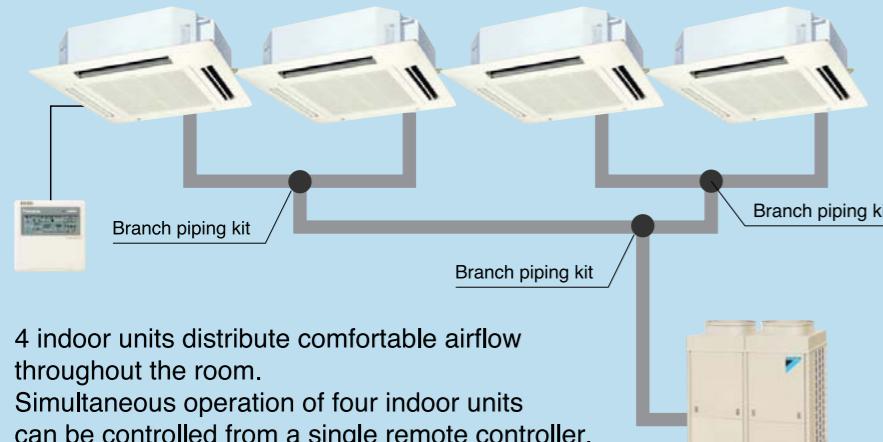


4 indoor units distribute comfortable airflow throughout the room. Simultaneous operation of four indoor units can be controlled from a single remote controller. Requires a single refrigerant piping system.


**Improved comfort level and space-saving
for outdoor unit installation**

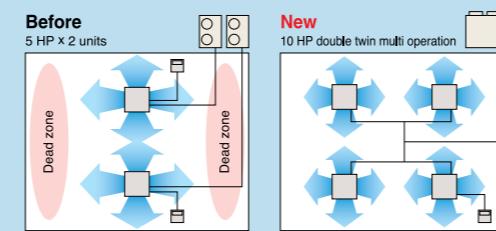


**Required about 40% less installation space
for outdoor unit**

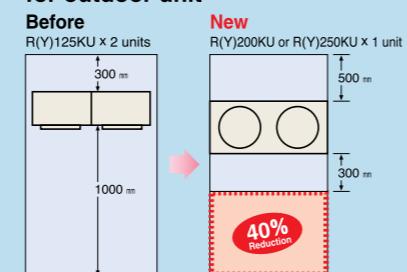

Triple Multi operation

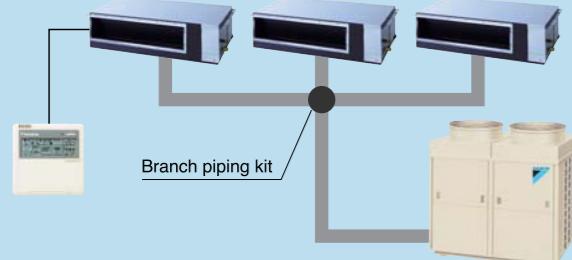

Twin Multi operation

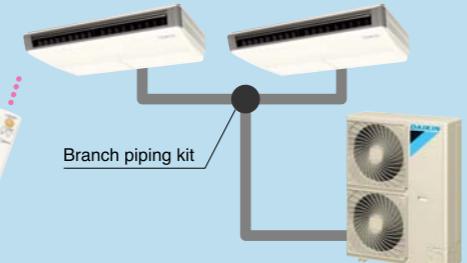


Remote controllers for the Multi Series

INDOOR UNIT	Wired LCD remote controller (Option)	Wireless LCD remote controller (Option)
CEILING MOUNTED CASSETTE TYPE	BRC1C61	Cooling only BRC7C613W Heat pump BRC7C612W
CEILING SUSPENDED TYPE		Cooling only BRC7EA66 Heat pump BRC7E63W
DUCT CONNECTION LOW STATIC PRESSURE TYPE		Heat pump BRC4C62
DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE		Cooling only BRC4C64 Heat pump BRC4C62

A single remote controller controls simultaneous operation of multiple indoor units.	Connect the wired remote controller to turn an indoor unit into the master unit.	Install the signal receiver unit (part of the optional wireless remote controller) to turn an indoor unit into the master unit.
Supports Two selectable temperature-sensor functions. Note: Selectable temperature sensing is available with ceiling-mounted cassette and ceiling-suspended models, but not with middle static-pressure models.	Wired remote controller has a temperature-sensor. Depending on the installation conditions, select and set the temperature-sensor of a selected indoor unit or the temperature-sensor of the remote controller. Note: An indoor unit's temperature-sensor must be used when the air conditioners are controlled from another room.	Because the wireless remote controller does not have a temperature-sensor, select the temperature-sensor of the indoor master unit.

Piping Guideline

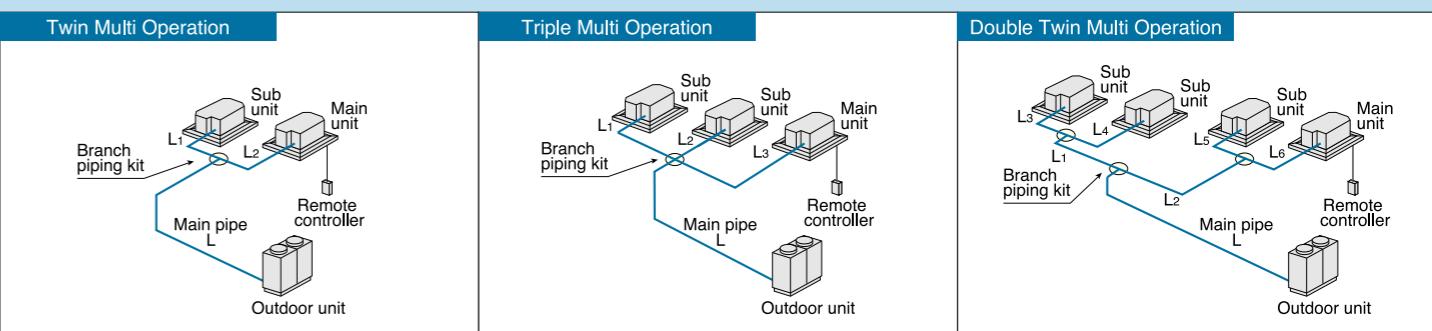

Simultaneous operation system	Twin Multi Operation	Triple Multi Operation	Double Twin Multi Operation
Max. piping length	$L + \text{Max.}(L_1, L_2) \leq 50 \text{ m}$	$L + \text{Max.}(L_1, L_2, L_3) \leq 50 \text{ m}$	$L + \text{Max.}(L_1, L_2) + \text{Max.}(L_3, L_4, L_5, L_6) \leq 50 \text{ m}$
Max. branch piping length	$\text{Max.}(L_1, L_2)^{*1} \leq 20 \text{ m}$	$\text{Max.}(L_1, L_2, L_3) \leq 20 \text{ m}$	$\text{Max.}(L_1, L_2) + \text{Max.}(L_3, L_4, L_5, L_6) \leq 20 \text{ m}$
Max. branch pipe length difference	$\text{Max.}(L_1, L_2) - \text{Min.}(L_1, L_2)^{*2} \leq 10 \text{ m}$	$\text{Max.}(L_1, L_2, L_3) - \text{Min.}(L_1, L_2, L_3) \leq 10 \text{ m}$	$(L_2 L_6) - (L_1 L_3) \leq 10 \text{ m}$ $L_2 - L_1 \leq 10 \text{ m}$ $L_4 - L_3 \leq 10 \text{ m}$ $L_6 - L_5 \leq 10 \text{ m}$ In case of $L_1 \leq L_2, L_3 \leq L_4, L_5 \leq L_6$
Max. level difference between outdoor unit and indoor units	$\leq 30 \text{ m}$	$\leq 30 \text{ m}$	$\leq 30 \text{ m}$
Max. level difference between indoor units	$\leq 0.5 \text{ m}$	$\leq 0.5 \text{ m}$	$\leq 0.5 \text{ m}$

*1 Max. (L_1, L_2) means maximum length out of L_1 and L_2 .

*2 Min. (L_1, L_2) means minimum length out of L_1 and L_2 .

Refrigerant piping uses terminal branching to facilitate installation.

(Branch piping kits are sold separately. Please use the model indicated on page 59)



(For Twin Multi)

(For Triple Multi)

(For Double Twin Multi)

OUTDOOR UNIT

Compact unit provides quiet operation.



R(Y)71LU

R(Y)100LU

R(Y)125LU

R(Y)140LU

Quiet Operation

Fitted with wide inlet fan (Applies to R(Y)71LU-140LU)

Fully shaped aerodynamic propellers are designed to push air with a large wing surface, providing both high blow volume and quiet operation with turbulence.

Wide inlet fan
(Applies to R(Y)71LU-140LU)

Fitted with Super Aero Grille (Applies to R(Y)71LU-140LU)

To suppress turbulence and achieve quiet operation, the curved ribs of the grille are optimised to meet the outflow of air.




Compact

Slim and low-profile design outdoor units (Applies to R(Y)71LU-140LU)

Compactly designed outdoor unit with interior layout optimised for the smooth airflow.

The design curved Super Aero Grille restricts the spread of exhaust gas and fits in the same space as conventional outdoor units.

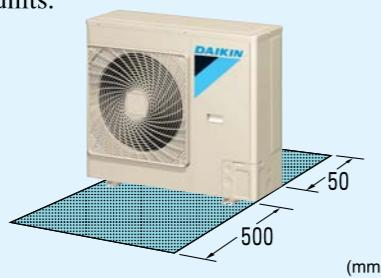

Reduced weight (Applies to R(Y)71LU-125LU)


The light weight makes delivery and installation easier.

conventional
108 kg
RY100KUV1

New
89 kg
RY100LUV1

Equipped with scroll compressor for quiet operation (Applies to R(Y)125LU and 140LU)

Smooth running, minimal vibration, low operating sound.

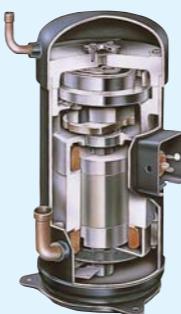

Operation sound dB(A)

Heat pump Outdoor unit	Sound level (cool/heating)
RY71LU	48/49
RY100LU	49/52
RY125LU	49/52
RY140LU	54/56
Cooling only Outdoor unit	Sound level
R71LU	48
R100LU	49
R125LU	49
R140LU	54

Note : Anechoic chamber conversion value, measured according to JIS parameters and criteria.

Powerful


Uses "Receiver" to enhance refrigerant control (Applies to R(Y)71LU-140LU)

Instead of using an accumulator to absorb excess refrigerant, Daikin outdoor units have a receiver in the piping located away from the compressor. By preventing the return of liquid to the compressor, the receiver enhances reliability.

Defrost control delivers powerful heating in extremely cold climates (Applies to R(Y)71LU-140LU) (Heat pump only)

To optimise heating performance, by monitoring the difference in air temperature in the indoor/outdoor heat exchanger and the intake air temperature, the system accurately adjusts to provide the best operating parameters. This enables defrost mode to be initiated and so minimise indoor declines in temperature caused by frost. For example, if the outdoor air temperature falls to -1.5°C , the integrated heating capacity is raised about 20%.

Integral heating capacity and temperature difference (actual measurement when outdoor temperature is -1.5°C)

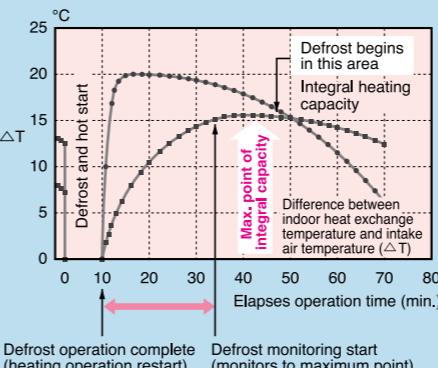

Suited for year-round cooling applications

Cooling is efficient even in winter when indoor temperatures are higher than those outside, such as in underground public spaces or offices with many computers.

- Heat pump/RY71-140LU: possible up to -5°C
- Cooling only/R71-140LU: possible up to -15°C
- The year-round cooling kit is required as option.

Durability

Heat exchange fins provided with anti-corrosion treatment (Applies to all outdoor units)

Construction

Non-treated fin	Aluminium
PE fin	Hydrophilic film Aluminium Corrosion resistant acrylic resin

Installation and maintenance

Pre charged for up to 30 metres

If refrigerant piping length does not exceed 30 m, there is no need for on-site gas charging.

(Applies to R(Y)71LU-140LU)

■ Allowed refrigerant pipe length and level difference

	Pre charged *1	Max. length	Max. level difference
R25J	10 m	25 m	15 m
RY35F	10 m	20 m	15 m
R35J	10 m	25 m	15 m
RY60GA R50G	10 m	30 m	15 m
RY60GA R60G	5 m	30 m	15 m
RY71LU R71LU	30 m (Equivalent length 70 m)	50 m (Equivalent length 70 m)	30 m
RY100LU R100LU	30 m (Equivalent length 70 m)	50 m (Equivalent length 70 m)	30 m
RY125LU R125LU	30 m (Equivalent length 70 m)	50 m (Equivalent length 70 m)	30 m
RY140LU R140LU	30 m (Equivalent length 70 m)	50 m (Equivalent length 70 m)	30 m
RG71A RA140A RG180A	5 m (Equivalent length 70 m)	50 m (Equivalent length 70 m)	30 m
R100FU R125FU	5 m (Equivalent length 70 m)	50 m (Equivalent length 70 m)	30 m

Note: *Additional refrigerant charging is required if the refrigerant pipe is longer than the length.


Flexible design for large room or multi-use



● Piping can be drawn out from three directions - front, left side, or below.

200 and 250 class models can be combined for centralised, horizontal-series installation

Common width and depth make series installation easy.

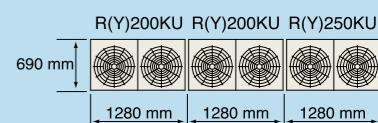

■ Allowed refrigerant pipe length and level difference

	Pre charged *1	Max. length	Max. level difference
R(Y)200KU	5 m (Equivalent length 70 m)	50 m	30 m
R(Y)250KU	5 m (Equivalent length 70 m)	50 m	30 m

Note: *Additional refrigerant charging is required if the refrigerant pipe is longer than the length.

Also adapts to year-round cooling

RY200KU and 250KU can adapt up to 0°C . (Heat pump only)

RU08/10K models are available in two type depending on installation conditions

RU08/10KU models are factory shipped with refrigerant charged for 5 m of piping.

RU08/10K models are factory shipped with no refrigerant charged.

LCD REMOTE CONTROLLERS

Necessary optional accessory



BRC1C61

Wired LCD remote controller

Easier to read because LCD screen is larger.

- For easier operation, louver switches, which are frequently used, have been made larger.
- Oil-resistant plastic casing.
- Only 17 mm thick. Can be installed either recessed or exposed.

Indoor units applicable for the remote controller

CEILING MOUNTED CASSETTE TYPE	BRC1C61
CEILING SUSPENDED TYPE	
CEILING SUSPENDED CASSETTE TYPE	
CEILING MOUNTED CASSETTE CORNER TYPE	
WALL MOUNTED TYPE	
CEILING MOUNTED BUILT-IN TYPE-1	
DUCT CONNECTION LOW STATIC PRESSURE TYPE *2	
DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE	
DUCT CONNECTION HIGH STATIC PRESSURE TYPE *2	

*1. When the auto-swing function is not available, the message, THIS FUNCTION IS NOT AVAILABLE is displayed when the wind direction adjustment button is pressed.
*2. Applicable to only heat pump type.

Wired LCD remote controller with weekly schedule timer

Remote control is equipped with weekly timer function.

- 24-hour clock function (1-hour backup for power failures)
- Programming function for each day of week.
- Scheduling possible of start/stop and temperature limit (5 settings/day)
- Programming can be enabled or disabled.
- Copy function for programmed schedules.

Indoor units applicable for the remote controller

CEILING MOUNTED CASSETTE TYPE	BRC1D61
CEILING SUSPENDED TYPE	
CEILING SUSPENDED CASSETTE TYPE	
CEILING MOUNTED CASSETTE CORNER TYPE	
WALL MOUNTED TYPE	
CEILING MOUNTED BUILT-IN TYPE-1	
DUCT CONNECTION LOW STATIC PRESSURE TYPE *2	
DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE	
DUCT CONNECTION HIGH STATIC PRESSURE TYPE *2	

*1. When the auto-swing function is not available, the message, THIS FUNCTION IS NOT AVAILABLE is displayed when the wind direction adjustment button is pressed.
*2. Applicable to only heat pump type.
*Standard remote controller (BRC1C61) is not required.
*If the BRC1D61 is connected to the centralised remote controller, the schedule function is not available.

Wireless LCD remote controller

signal receiver mounted type

- The wireless remote controller is supplied in a set with a signal receiver.
- Shape of signal receiver unit differs according to the indoor unit.

Note: The signal receiver unit shown in the photograph is for mounting inside the decoration panel of the ceiling mounted cassette type.

Indoor units applicable for the remote controller

Signal receiver unit is contained inside decoration panel or indoor unit		
	Heat pump	Cooling only
CEILING MOUNTED CASSETTE TYPE	BRC7C612W	BRC7C613W
CEILING SUSPENDED TYPE	BRC7E63W	BRC7EA66
CEILING SUSPENDED CASSETTE TYPE	BRC7C528W	BRC7C529W
WALL MOUNTED TYPE	BRC7E61L	BRC7E618
	BRC7E619	
DUCT CONNECTION LOW STATIC PRESSURE TYPE	BRC7C610W	BRC7C611W
DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE	BRC4C62	—
DUCT CONNECTION HIGH STATIC PRESSURE TYPE	BRC4C62	—

Wireless remote controller



Easy-to-read LCD remote controller allows various system control configurations and can control multiple indoor units.

* Remote controller options are shown on the page introducing each indoor unit model.

LCD panel shows operating status in letters, numbers, and motion.

- Airflow / swing display** Displays auto-swing operating status and setting position of air discharge angle.
(Not available for ceiling mounted built-in type and duct connection type)
- Preset temperature / operation mode display** Displays preset room temperature and operating status (fan, dry, cool).
- Programming time display** Operation start and stop time can be set for individual timers up to 72 hours. The liquid crystal display also shows when it is time to clean the filter, when changeover is under centralised control, and ventilation/cleaning.
- Self-diagnosis function** Monitors operating status within the system covering 40 items, and displays a message to indicate as soon as a malfunction occurs.

Simple system provides a diverse assortment of control modes.

	Control pattern	Wired remote controller	Wireless remote controller
Control by 1 remote controller	(Basic system)	 ● Non-polar, double-core (max. wiring length 500 m)	 ● Signal receiver unit installed on indoor unit
Control by 2 remote controllers	For control from 2 locations such as in room and control room, exits, etc.	 ● Connects 2 wired remote controllers	 ● Control by 1 wireless remote controller and 1 wired remote controller (See note 1) ● Signal receiver unit installed on indoor unit
Group control	For simultaneous control of up to 16 indoor units.	 ● Automatic address setting function	 ● Automatic address setting function ● Signal receiver unit installed on 1 indoor unit
Control by external command	Operation and surveillance is carried out using the contact signal from the operation control box in the building surveillance (security) room.	 ● (Command from outside) ● Optional wiring adaptor for electrical appendices is necessary	 ● (Command from outside) ● Optional wiring adaptor for electrical appendices is necessary
Centralised remote control	Centralised control of up to 64 indoor groups from remote location up to 1 kilometer away.	 ● Optional SkyAir series interface adaptor required. *1	 ● Optional SkyAir series interface adaptor required. *1
Interlock control with HRV	<p>Link by remote controller group control.</p> <p>Zone link control by centralised control.</p>	 ● Can be operated simultaneously or independently by remote controller (set by ventilation mode)	 ● Can be operated simultaneously by remote controller (set by ventilation mode)
		 ● HRV for indoor units within a zone are operated by interlocking Can also be operated independently by remote controller. ● Optional interface adaptor for SkyAir series is necessary *1	 ● HRV for indoor units within a zone are operated by interlocking ● Optional interface adaptor for SkyAir series is necessary *1

Note: When a wireless remote controller is used, remote control by two remote controllers is not possible.

*1. DIII-net adaptor function is standard equipment for the FAY71L.

Easily adaptable to large-scale, high-function, centralised remote control system.

Central remote controller

DCS302CA61 (Option)



Centralised control, with setting as simple as it is with a standard remote controller, of up to 64 groups (1,024 indoor units) is possible.

Interface adaptor for SkyAir series

DTA102A52 (Option)

Enables centralised control via connection to a high-speed, DIII-NET communication system, adopted for the Daikin VRV system. Necessary for interface adaptor for SkyAir series with the central remote control units shown at above.

Unified on/off controller

DCS301BA61 (Option)



Centralised control of on/off by group or all at once for up to 256 indoor units.

Schedule timer

DST301BA61 (Option)



Unified control of weekly schedule for up to 1,024 indoor units. Schedule timer sets on/off time in 1 minute units to be executed twice a day for a week at a time.

Intelligent Controller

DCS601C51 (Option)



With its high functionality, the full color "all-in-one" graphic controller facilitates management of SkyAir System in a variety of ways.

*Please refer to the page 59 for the details.

Central control adaptor kit

DTA107A55 (Option) (for FD series)

*2. The central control adaptor kit for FDB series can be made to order.


Abundance of functions that provide comfortable air-conditioning in stores and offices.

Note: Some features only available on selected models. See model pages for full list of features applicable to each unit.

Comfort

Auto-swing

Delivers comfortable air-conditioning to all areas, near to and far from the air-conditioner.

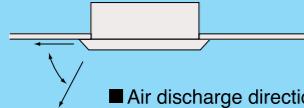

Swing pattern selection

(draft prevention, standard, ceiling soiling prevention)


You can freely set 3 air discharge positions by remote controller.

•Applicable for ceiling mounted cassette type and ceiling mounted cassette corner type.

(1) Air direction in standard position



(2) Air direction in draft prevention position




(3) Air direction in ceiling soiling prevention position



Draft prevention function (heating)

To prevent cold air drafts, automatically adjusts airflow to horizontal vector when heating initially starts or when the thermostat turns off.



Switchable fan speed

High setting provides maximum reach while low setting minimises drafts.

Programme "Dry"

Dehumidification is microprocessor controlled to prevent uncomfortable changes in air temperature. Useful for reducing uncomfortable humidity without uncomfortable cooling.

Mould prevention

Mould-resistant treatment for filter

Sanitary filter has mould-resistant treatment.

Mould-proofing drain pan

Mould-proofing maintains hygiene by preventing growth in highly humid conditions.

Others

Twin / triple / double twin multi operation

Simultaneously operates 2-4 indoor units with a single outdoor unit.


PE fin

To achieve increased durability by improved resistance to salt corrosion and atmospheric pollution, coated PE fins (with special acrylic pretreatment) are used for the heat exchanger of the outdoor unit. In high corrosive areas, regular maintenance needs to be carried out.

Work and Servicing

Drain pump mechanism

Steeper gradient realises more efficient condensate drainage. High-lift is especially useful for long lengths of drain piping.



Pre charged for up to 30 metres

If refrigerant piping length does not exceed 30 m, there is no need for on-site gas charging.

(Applies to R(Y)71LU-140LU)

Long-life filter

Maintenance is not required for one year (two years when a ceiling mounted cassette type is used).

Ceiling soiling prevention function

Daikin's innovative air discharge mechanism keeps airflow away from the ceiling. Ceiling cleaning is less frequently required.

Filter sign

The filter sign warns you when it is time to clean the filter.

*When using a wired remote controller the sign is displayed in the LCD. When using a wireless remote controller the filter sign lamp illuminates on the signal receiver unit.

Control features

Auto-restart

If there is a power outage while the equipment is operating, operations will restart in the same mode as before the power cut when electricity is restored.

Auto cool/heat change-over (Heat pump only)

Detects difference in preset temperature and actual room temperature and automatically switches to cooling or heating accordingly.

Control by 2 remote controllers

Using 2 remote controllers you can operate the equipment locally or from a remote location.

Note: When a wireless remote controller is used, remote control by two remote controllers is not possible.

Control by 1 remote controller

You can turn up to 16 indoor units on/off with a single remote controller. (When using connected indoor units, the settings must all be the same and on/off will be simultaneous.)

External command control

Operation and surveillance is carried out using the contact signal from the operation control box in the building surveillance (security) room.

Central remote control

Optional central remote controller enables centralised control of up to 1024 indoor units (64 groups) from up to 1 kilometer away.

Interlock control

Enables interlocking control with external equipment such as heat reclaim ventilation (HRV).

Options

High-efficiency filter unit

Two types are available: 65% and 90% colorimetry.

Ultra long-life filter

Requires no maintenance for about 4 years* (10,000 h) in stores and offices. * For dust concentration of 0.15 mg/m³

Fresh-air intake kit

You can provide air-conditioning with fresh air from outside. Convenient for places where a ventilation fan cannot be installed.

Note: *Connecting ducts, insect nets, fire dampers, air filters, and other parts should, as required, be procured locally.

**Outside Air fan interlocked with air conditioning unit is necessary. Optional PCB(KRP1C63) is required for interlocking.

***It is recommended that the volume of outdoor air introduced through the kit is limited to 10% of the maximum airflow rate of the indoor unit. Introducing higher quantities will increase the operating noise and may also influence temperature sending.

SPECIFICATIONS

CEILING MOUNTED CASSETTE TYPE

Model Name	Indoor unit		35	50	60	71	100	125	140						
	Outdoor unit		FHC35KVE	FHC50KVE	FHC60KVE	FHYC71KVE	FHYC100KVE	FHYC125KVE	FHYC140KVE						
Power supply															
Cooling capacity ^{1a/1b}		kW	3.54/3.5	5.34/5.3	6.44/6.4	7.8/7.7	10.6/10.5	13.0/12.8	14.5/14.2						
Btu/h			12,100/11,900	18,200/18,100	22,000/21,800	26,600/26,200	36,100/35,700	44,500/43,600	49,400/48,400						
kcal/h			3,040/3,010	4,590/4,560	5,540/5,500	6,700/6,600	9,100/9,000	11,200/11,000	12,500/12,200						
Power consumption ^{1a/1b}		kW	1.20/1.20	2.02/2.01	2.45/2.44	3.07/3.07 (V1) 3.05/3.05 (Y1)	4.01/4.01 (V1) 3.96/3.96 (Y1)	4.96/4.96	5.02/5.02						
Indoor unit	Colour	Unit	White												
	Decoration panel														
	Airflow rate (H)		m³/min	14	15	19	28	33	35						
	cfm			494	529	670	988	1,164	1,235						
	Sound level (H/L) ²		dB(A)	33/29	33/29	35/30	35/30	42/36	44/37						
	Dimensions (H×W×D)	Unit	mm	230×840×840	230×840×840	230×840×840	230×840×840	288×840×840	288×840×840						
	Decoration panel		mm	40×950×950	40×950×950	40×950×950	40×950×950	40×950×950	40×950×950						
	Machine weight	kg		24	24	24	28	28	28						
Outdoor unit	Unit	kg		5	5	5	5	5	5						
	Certified operation range		iCWB	14 to 23			14 to 25								
	Colour		Ivory white												
	Compressor	Type	Hermetically sealed rotary type												
	Motor output		kW	1.1	1.7	2.2	2.24	3.00	3.75						
	Refrigerant charge (R-22)		kg	1.10 (Charged for 10 m)	1.20 (Charged for 10 m)	1.50 (Charged for 5 m)	2.8 (Charged for 30 m)	3.7 (Charged for 30 m)	4.1 (Charged for 30 m)						
	Sound level ²		dB(A)	48	49	54	48	49	49						
	Dimensions (H×W×D)		mm	540×750×270	540×750×270	685×800×300	770×900×320	1,170×900×320	1,345×900×320						
Piping connections	Machine weight	kg		37	42	61	72 (V1), 71 (Y1)	87 (V1), 84 (Y1)	98						
	Certified operation range		iCDB	19.4 to 46	19.4 to 54	19.4 to 46	21 to 46, -15 to 46 ³ (Option installed)	19.4 to 54	19.4 to 46						
	Liquid (Flare)		mm	ø6.4	ø6.4	ø6.4	ø9.5	ø9.5	ø9.5						
	Gas (Flare)		mm	ø12.7	ø15.9	ø15.9	ø19.1	ø19.1	ø19.1						
	Drain	Indoor unit	mm	I.Dø25×O.Dø32	I.Dø25×O.Dø32	I.Dø25×O.Dø32	I.Dø25×O.Dø32	I.Dø25×O.Dø32	I.Dø25×O.Dø32						
		Outdoor unit	mm	ø18.0 (Hole)	ø18.0 (Hole)	ø18.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)						
Max. interunit piping length		m	25	30		50 (equivalent length 70 m)									
Max. installation level difference		m	15	30		30									
Heat insulation															

CEILING SUSPENDED TYPE

Model Name	Indoor unit		35	50	60	71	100	125						
	Outdoor unit		R35GV1	R50GV1	R60GV1	R71LUV1	R100LUV1	R125LUY1						
Power supply														
Cooling capacity ^{1a/1b}		kW	3.54/3.4	5.19/5.1	6.6/6.5	7.8/7.7								
Btu/h			12,100/11,600	17,700/17,500	22,760/22,200	26,600/26,200								
kcal/h			3,040/2,930	4,460/4,400	5,690/5,600	6,700/6,600								
Power consumption ^{1a/1b}		kW	1.51/1.50	2.16/2.15	2.80/2.78	3.10/3.10 (V1) 3.08/3.08 (Y1)	3.90/3.90 (V1) 3.85/3.85 (Y1)	4.92/4.92						
Indoor unit	Colour	White												
	Airflow rate (H)		m³/min	13	13	16	17	24						
	cfm			458	458	564	600	847						
	Sound level (H/L) ²		dB(A)	37/32	38/33	38/33	39/35	42/37						
	Dimensions (H×W×D)		mm	195×960×680	195×960×680	195×1,160×680	195×1,160×680	195×1,400×680						
	Machine weight	kg		23	24	26	27	32						
	Certified operation range		iCWB	14 to 23			14 to 25							
	Colour		Ivory white											
Outdoor unit	Compressor	Type	Hermetically sealed rotary type											
	Motor output		kW	1.1	1.7	2.2	2.24	3.00	3.75					
	Refrigerant charge (R-22)		kg	1.10 (Charged for 10 m)	1.20 (Charged for 10 m)	1.50 (Charged for 5 m)	2.8 (Charged for 30 m)	3.7 (Charged for 30 m)	4.1 (Charged for 30 m)					
	Sound level ²		dB(A)	48	49	54	48	49	49					
	Dimensions (H×W×D)		mm	540×750×270	540×750×270	685×800×300	770×900×320	1,170×900×320	1,345×900×320					
	Machine weight	kg		37	42	61	72 (V1), 71 (Y1)	87 (V1), 84 (Y1)	98					
	Certified operation range		iCDB	19.4 to 46	19.4 to 54	19.4 to 46	21 to 46, -15 to 46 ³ (Option installed)	19.4 to 54	19.4 to 46					
	Liquid (Flare)		mm	ø6.4	ø6.4	ø6.4	ø9.5	ø9.5	ø9.5					
Piping connections	Gas (Flare)		mm	ø12.7	ø15.9	ø15.9	ø19.1	ø19.1	ø19.1					
	Drain	Indoor unit	mm	I.Dø20×O.Dø32	I.Dø20×O.Dø32	I.Dø20×O.Dø32	I.Dø20×O.Dø32	I.Dø20×O.Dø32	I.Dø20×O.Dø32					
		Outdoor unit	mm	ø18.0 (Hole)	ø18.0 (Hole)	ø18.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)					
Max. interunit piping length		m	25	30		50 (equivalent length 70 m)								
Max. installation level difference		m	15	30		30								
Heat insulation														

Note :
¹Rated cooling capacities are based on the following conditions:
^{1a}Indoor temp., 27°CDB, 19.5°CWB; outdoor temp. 35°CDB. Equiv. refrigeration piping, 5 m (horizontal).
^{1b}Indoor temp., 27°CDB, 19.0°CWB; outdoor

SPECIFICATIONS

CEILING MOUNTED BUILT-IN TYPE

Model	Indoor unit	35	45	60	71	100	125	
Name	Outdoor unit	FHB35FV1	FHB45FV1	FHB60FV1	FHYB71FV1	FHYB100FV1	FHYB125FV1	
Power supply								
V1: 1 Phase, 220–240 V, 50 Hz Y1: 3 Phase, 380–415 V, 50 Hz								
Cooling capacity ^{1a/1b}		kW	3.54/3.4	5.19/5.1	6.6/6.5	7.8/7.7	10.6/10.5	
Btu/h			12,100/11,600	17,700/17,500	22,760/22,200	26,600/26,200	36,100/35,700	
kcal/h			3,040/2,930	4,460/4,400	5,690/5,600	6,700/6,600	9,100/9,000	
Power consumption ^{1a/1b}		kW	1.47/1.46	2.33/2.32	2.78/2.76	3.13/3.13 (V1) 3.11/3.11 (Y1)	4.00/4.00 (V1) 3.95/3.95 (Y1)	
Indoor unit		Colour	Unit	White				
Indoor unit	Decoration panel		White					
	Airflow rate (H)		m³/min	11.5	14	17	19	
	cfm			405	494	600	670	
	Sound level (H/L) ²		dB(A)	38/32	39/34	41/35	41/35	
	Dimensions (H×W×D)		mm	300×700×800	300×700×800	300×1,000×800	300×1,000×800	
Machine weight		kg	55×880×500	55×880×500	55×1,100×500	55×1,100×500	55×1,500×500	
Machine weight		kg	30	31	41	41	51	
Machine weight		kg	3.5	3.5	4.5	4.5	6.5	
Certified operation range		iCWB	14 to 23		14 to 25			
Outdoor unit		Ivory white						
Outdoor unit	Compressor		Hermetically sealed rotary type				Hermetically sealed scroll type	
	Motor output		kW	1.1	1.7	2.2	2.24	3.00
	Refrigerant charge (R-22)		kg	1.10	1.20	1.50	2.8	3.7
	Sound level ²		dB(A)	48	49	54	48	49
	Dimensions (H×W×D)		mm	540×750×270	540×750×270	685×800×300	770×900×320	1,170×900×320
Machine weight		kg	37	42	61	72 (V1), 71 (Y1)	87 (V1), 84 (Y1)	98
Certified operation range		iCDB	19.4 to 46	19.4 to 54	19.4 to 46	21 to 46, -15 to 46 ³ (Option installed)		
Piping connections		Liquid (Flare)	mm	ø6.4	ø6.4	ø6.4	ø9.5	ø9.5
		Gas (Flare)	mm	ø12.7	ø15.9	ø15.9	ø15.9	ø19.1
		Drain	Indoor unit	mm	I.Dø25×O.Dø32	I.Dø25×O.Dø32	I.Dø25×O.Dø32	I.Dø25×O.Dø32
		Outdoor unit	mm	ø18.0 (Hole)	ø18.0 (Hole)	ø18.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)
Max. interunit piping length		m	25	30	50 (equivalent length 70 m)			
Max. installation level difference		m		15	30			
Heat insulation		Both liquid and gas piping						

WALL MOUNTED TYPE

Model	Indoor unit	71	100				
Name	Outdoor unit	FAY71LVE	FAY100FAVE				
Power supply							
VE: 1 Phase, 220–240/220 V, 50/60 Hz V1: 1 Phase, 220–240 V, 50 Hz Y1: 3 Phase, 380–415 V, 50 Hz							
Cooling capacity ^{1a/1b}		kW	7.8/7.7				
Btu/h			26,600/26,200				
kcal/h			6,700/6,600				
Power consumption ^{1a/1b}		kW	2.98/2.98 (V1) 2.96/2.96 (Y1)				
Indoor unit		White					
Indoor unit	Airflow rate (H)		m³/min				
	cfm						
	Sound level (H/L) ²		dB(A)				
	Dimensions (H×W×D)		mm				
	Machine weight		kg				
Certified operation range		iCWB	14 to 25				
Outdoor unit		Ivory white					
Outdoor unit	Compressor		Hermetically sealed scroll type				
	Motor output		kW	2.24	3.00		
	Refrigerant charge (R-22)		kg	2.8 (Charged for 30 m)	3.7 (Charged for 30 m)		
	Sound level ²		dB(A)	48	49		
	Dimensions (H×W×D)		mm	770×900×320	1,170×900×320		
Machine weight		kg	72 (V1), 71 (Y1)	87 (V1), 84 (Y1)			
Certified operation range		iCDB	21 to 46, -15 to 46 ³ (Option installed)				
Piping connections		Liquid (Flare)	mm	ø9.5	ø9.5		
		Gas (Flare)	mm	ø15.9	ø19.1		
		Drain	Indoor unit	mm	I.Dø20×O.Dø26	I.Dø20×O.Dø26	I.Dø20×O.Dø26
		Outdoor unit	mm	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)
Max. interunit piping length		m		50 (equivalent length 70 m)			
Max. installation level difference		m		30			
Heat insulation		Both liquid and gas piping					

FLOOR STANDING TYPE

Model	Indoor unit	71	100	125			
Name	Outdoor unit	FVY71LAVE	FVY100LAVE	FVY125LAVE			
Power supply							
Cooling capacity ^{1a/1b}		kW	7.8/7.7	10.6/10.5			
Btu/h			26,600/26,200	36,100/35,700			
kcal/h			6,700/6,600	9,100/9,000			
Power consumption ^{1a/1b}		kW	3.18/3.18 (V1) 3.16/3.16 (Y1)	4.03/4.03 (V1) 3.98/3.98 (Y1)			
Indoor unit		White					
Indoor unit	Airflow rate (H)		m³/min	18			
	cfm			635			
	Sound level (H/L) ²		dB(A)	41/35			
	Dimensions (H×W×D)		mm	1,850×600×270			
	Machine weight		kg	39			
Certified operation range		iCWB	14 to 25				
Outdoor unit		Ivory white					
Outdoor unit	Compressor		Hermetically sealed scroll type				
	Motor output		kW	2.24	3.00		
	Refrigerant charge (R-22)		kg	2.8 (Charged for 30 m)	3.7 (Charged for 30 m)		
	Sound level ²		dB(A)	48	49		
	Dimensions (H×W×D)		mm	770×900×320	1		

SPECIFICATIONS

DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE

		71	100	125	140	180		
Model□ Name	Indoor unit	FDMG71AV1	FDMG100AV1	FDMG125AV1	FDMG140AV1	FDMG180AV1		
	Outdoor unit	RG71AV1	R100FUV1	R125FUV1	RG140AY1	RG180AY1		
Power supply		V1: 1 Phase, 220–240 V, 50 Hz Y1: 3 Phase, 380–415 V, 50 Hz						
Cooling capacity ^{1a/1b}		kW	8.8/8.7	10.6/10.5	13.1/12.9	14.5/14.2	17.2/16.8	
Btu/h			30,000/29,600	36,100/35,700	44,500/43,600	49,400/48,400	58,700/57,500	
kcal/h			7,600/7,500	9,100/9,000	11,200/11,000	12,500/12,200	14,700/14,400	
Power consumption ^{1a/1b}		kW	3.15/3.13	4.08/4.04	4.89/4.85	5.25/5.25	6.45/6.45	
Indoor unit	Colour		—					
	Fan	Airflow rate (H)	m³/min	23	34	37	42	42
			cfm	811	1,200	1,306	1,412	1,482
	Sound level (H) ²	dB(A)		42	44	45	46	47
	Dimensions (H×W×D)	mm	305×1,350×680	305×1,550×680	305×1,550×680	305×1,550×680	305×1,900×680	
Outdoor unit	Machine weight	kg	43	51	52	52	58	
	Certified operation range	iCWB	14 to 25					
	Colour		Ivory white					
	Compressor	Type	Hermetically sealed type					
	Motor output	kW	2.20	3.00	3.75	4.50	4.50	
Refrigerant charge (R-22)		kg	2.4 (Charged for 5 m)	2.4 (Charged for 5 m)	2.8 (Charged for 5 m)	2.9 (Charged for 5 m)	2.8 (Charged for 5 m)	
Sound level ²		dB(A)	52	56	57	55	56	
Dimensions (H×W×D)		mm	816×880×370	1,215×880×370	1,215×880×370	1,345×880×370	1,345×880×370	
Machine weight		kg	87 (V1), 84 (Y1)	117 (V1), 109 (Y1)	110	113	114	
Certified operation range		iCDB	21 to 52					
Piping connections	Liquid (Flare)	mm	ø9.5	ø9.5	ø9.5	ø9.5	ø9.5	
	Gas (Flare)	mm	ø15.9	ø19.1	ø19.1	ø19.1	ø19.1	
	Drain	Indoor unit	mm	3/4B	3/4B	3/4B	3/4B	
Outdoor unit		mm	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	
Max. interunit piping length		m	50 (equivalent length 70 m)					
Max. installation level difference		m	30					
Heat insulation		Both liquid and gas piping						

		71	100	125	140		
Model□ Name	Indoor unit	FDYM03FAV1	FDYM04FAV1	FDYM05FAV1	FDYM06FAV1		
	Outdoor unit	R71LUV1	R100LUV1	R125LUY1	R140LUY1		
Power supply		V1: 1 Phase, 220–240 V, 50 Hz Y1: 3 Phase, 380–415 V, 50 Hz					
Cooling capacity ^{1a/1b}		kW	7.8/7.7	10.6/10.5	13.0/12.8	14.5/14.2	
Btu/h			26,600/26,200	36,100/35,700	44,500/43,600	49,400/48,400	
kcal/h			6,700/6,600	9,100/9,000	11,200/11,000	12,500/12,200	
Power consumption ^{1a/1b}		kW	3.25/3.25 (V1) 3.23/3.23 (Y1)	4.08/4.08 (V1) 4.03/4.03 (Y1)	5.06/5.06	5.18/5.18	
Indoor unit	Colour		—				
	Fan	Airflow rate (H)	m³/min	20	26	35	37
			cfm	706	917	1,235	1,306
	External static pressure	Pa/mmH ₂ O		98(10)	98(10)	98(10)	98(10)
	Sound level (H) ²	dB(A)		39	39	44	46
Dimensions (H×W×D)		mm	295×1,100×680	295×1,500×680	295×1,500×680	295×1,500×680	
Machine weight		kg	42	56	57	57	
Certified operation range		iCWB	14 to 25				
Outdoor unit	Colour		Ivory white				
	Compressor	Type	Hermetically sealed scroll type				
	Motor output	kW	2.24	3.00	3.75	4.50	
	Refrigerant charge (R-22)	kg	2.8 (Charged for 30 m)	3.7 (Charged for 30 m)	3.7 (Charged for 30 m)	4.1 (Charged for 30 m)	
	Sound level ²	dB(A)		48	49	49	54
Dimensions (H×W×D)		mm	770×900×320	1,170×900×320	1,170×900×320	1,345×900×320	
Machine weight		kg	72 (V1), 71 (Y1)	87 (V1), 84 (Y1)	98	109	
Certified operation range		iCDB	21 to 46, -15 to 46 ³ (Option installed)				
Piping connections	Liquid (Flare)	mm	ø9.5	ø9.5	ø9.5	ø9.5	
	Gas (Flare)	mm	ø15.9	ø19.1	ø19.1	ø19.1	
	Drain	Indoor unit	mm	I.D.ø25×O.D.ø32	I.D.ø25×O.D.ø32	I.D.ø25×O.D.ø32	I.D.ø25×O.D.ø32
Outdoor unit		mm	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	
Max. interunit piping length		m	50 (equivalent length 70 m)				
Max. installation level difference		m	30				
Heat insulation		Both liquid and gas piping					

Note : ¹Rated cooling capacities are based on the following conditions:

^{1a}Suction temp., 27°CDB, 19.5°CWB; outdoor temp. 35°CDB. Equiv. refrigeration piping, 5 m (horizontal).

^{1b}Suction temp., 27°CDB, 19.0°CWB; outdoor temp. 35°CDB. Equiv. refrigeration piping, 5 m (horizontal). (R71LU-R140LU is 7.5 m.)

²Anechoic chamber conversion value, measured according to JIS parameters and criteria.

During operation these values are somewhat higher owing to ambient conditions.

³This value is for when year-round cooling kit (option) is installed.

DUCT CONNECTION HIGH STATIC PRESSURE TYPE

		71	100	125	140	
Model□ Name	Indoor unit	FD03KY1	FD04KY1	FD05KY1	FD06KY1	
	Outdoor unit	R71FUY1	R100FUY1	R125FUY1	RU06KY1	
Power supply		Y1: 3 phase, 380–415 V, 50 Hz				
Cooling capacity ^{1a/1b}		kW	8.1/7.9	11.0/10.8	14.0/13.8	17.4/17.2
Btu/h			27,800/27,000	37,700/36,900	47,600/46,800	59,500/58,800
kcal/h			7,000/6,800	9,500/9,300	12,000/11,800	15,000/14,800
Power consumption ^{1a/1b}		kW	2.50/2.48	3.52/3.48	4.19/4.15	5.7/5.7
Indoor unit</td						

SPECIFICATIONS

DUCT CONNECTION HIGH STATIC PRESSURE TYPE

		200	250	400	500
Model Name	Indoor unit	FD08KY1	FD10KY1	FD15KY1	FD20KY1
	Outdoor unit	RU08KY1	RU10KY1	RU08KY1×2	RU10KY1×2
Power supply					
Cooling capacity ^{1a/b}	kW	24.3/24.0	29.7/29.2	48.6/47.9	59.3/58.4
Btu/h		83,000/81,800	101,200/99,600	166,000/163,500	202,400/199,400
kcal/h		20,900/20,600	25,500/25,100	41,800/41,200	51,000/50,200
Power consumption ^{1a/b}	kW	7.5/7.4	9.9/9.8	15.0/14.8	19.8/19.6
Indoor unit	Colour				
Airflow rate (H)	m³/min	68	83	136	166
	cfm	2,400	2,929	4,800	5,859
Fan	External static pressure [Pa/mmH ₂ O]	98 (10)		147 (15)	
Driving system			Belt drive		
Sound level (H) ²	dB(A)	51	53	58	60
Dimensions (H×W×D)	mm	500×1,130×850	500×1,330×850	625×1,620×850	625×1,980×850
Machine weight	kg	93	104	161	187
Certified operation range	iCWB		14 to 25		
Outdoor unit	Colour		Ivory white		
Compressor	Type		Hermetically sealed scroll type		
Motor output	kW	7.5	9.0	7.5×2	9.0×2
Refrigerant charge (R-22)	kg	5.0	6.1	5.0	6.1
(Field charge required for 5 m) ⁴		(Field charge required for 5 m) ⁴	(Field charge required for 5 m) ⁴ × 2	(Field charge required for 5 m) ⁴ × 2	
Sound level ²	dB(A)	60	61	60 ³	61 ³
Dimensions (H×W×D)	mm	1,220×1,280×690	1,440×1,280×690	(1,220×1,280×690)×2	(1,440×1,280×690)×2
Machine weight	kg	177	190	177×2	190×2
Certified operation range	iCDB		21 to 52		
Piping connections	Liquid (Brazing)	mm	ø12.7	ø15.9	ø12.7×2
	Gas (Brazing)	mm	ø25.4	ø31.8	ø25.4×2
Drain	Indoor unit	mm	3/4B		1B
	Outdoor unit	mm			
Max. interunit piping length	m		50 (equivalent length 70 m)		
Max. installation level difference	m		30		
Heat insulation			Both liquid and gas piping		

Note : Models RU08K(U)Y1 and RU10K(U)Y1 are recommended for commercial facilities.

¹Rated cooling capacities are based on the following conditions:

²Suction temp., 27°CDB, 19.5°CWB; outdoor temp. 35°CDB. Equiv. refrigeration piping, 5 m (horizontal).

³Bsuction temp., 27°CDB, 19.0°CWB; outdoor temp. 35°CDB. Equiv. refrigeration piping, 5 m (horizontal).

⁴Anechoic chamber conversion value, measured according to JIS parameters and criteria.

During operation these values are somewhat higher owing to ambient conditions.

³Specification for outdoor unit is for a single unit only.

⁴This is the amount of refrigerant required for piping of five meters or less.

Since the unit does not contain refrigerant when shipped from the factory, it must be added at the installation site.

For details, please refer to the installation manual.

SPECIFICATIONS

Simultaneous operation system TWIN & TRIPLE & DOUBLE TWIN MULTI

CEILING MOUNTED CASSETTE TYPE

		71	100	125	140	200	250
Model Name	Indoor unit	FHYC35KVE×2	FHYC50KVE×2	FHYC60KVE×2	FHYC71KVE×2	FHYC100KVE×2	FHYC125KVE×2
	Outdoor unit	R71LUV1	R100LUV1	R125LUY1	R140LUY1	R200KUY1	R250KUY1
Power supply							
Cooling capacity ^{1a/b}	kW	7.8/7.7	10.6/10.5	13.0/12.8	14.5/14.2	22.5/22.2	27.1/26.6
Btu/h		26,600/26,200	36,100/35,700	44,500/43,600	49,400/48,400	76,800/75,800	92,500/90,800
kcal/h		6,700/6,600	9,100/9,000	11,200/11,000	12,500/12,200	19,400/19,100	23,300/22,900
Power consumption ^{1a/b}	kW	3.17/3.17 (V1) 3.15/3.15 (Y1)	4.06/4.06 (V1) 4.01/4.01 (Y1)	5.01/5.01	5.02/5.02	7.7/7.6	9.7/9.7
Indoor unit ³	Colour						
	Decoration panel						
						White	
Airflow rate (H)	m³/min	14	15	19	19	28	33
	cfm	494	529	670	670	988	1,164
Sound level (H/L) ²	dB(A)	33/29	33/29	35/30	35/30	39/34	42/36
Dimensions (H×W×D)	Unit	mm	230×840×840	230×840×840	230×840×840	288×840×840	288×840×840
	Decoration panel	mm	40×950×950	40×950×950	40×950×950	40×950×950	40×950×950
	Machine weight	kg	24	24	24	28	28
	Decoration panel	kg	5	5	5	5	5
Certified operation range	iCWB		14 to 25				
Outdoor unit	Colour		Ivory white				
	Type		Hermetically sealed scroll type				
Compressor	Motor output	kW	2.24	3.00	3.75	4.50	5.5
	Refrigerant charge (R-22)	kg	2.8	3.7	3.7	4.1	5.3
			(Charged for 30 m)	(Charged for 30 m)	(Charged for 30 m)	(Charged for 30 m)	(Charged for 5 m)
Sound level ²	dB(A)	48	49	49	54	60	61
Dimensions (H×W×D)	mm	770×900×320	1,170×900×320	1,170×900×320	1,345×900×320	1,220×1,280×690	1,440×1,280×690
Machine weight	kg	72 (V1), 71 (Y1)	87 (V1), 84 (Y1)	98	109	178	202
Certified operation range	iCDB		21 to 46, -15 to 46 ⁴ (Option installed)				-5 to 52
Piping connections	Liquid (Flare)	mm	ø9.5	ø9.5	ø9.5	ø12.7	ø15.9
	Gas	mm	ø15.9 (Flare)	ø19.1 (Flare)	ø19.1 (Flare)	ø19.1 (Flare)	ø28.6 (Flange)
Drain	Indoor unit	mm	I.Dø25×O.Dø32	I.Dø25×O.Dø32	I.Dø25×O.Dø32	I.Dø25×O.Dø32	I.Dø25×O.Dø32
	Outdoor unit	mm	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	—
Max. interunit piping length	m				50 (equivalent length 70 m)		
Max. installation level difference	m				30		
Heat insulation					Both liquid and gas piping		

		140	200	200	250
Model Name	Indoor unit	FHYC50KVE×3	FHYC71KVE×3	FHYC50KVE×4	FHYC60KVE×4
	Outdoor unit	R140LUV1	R200KUY1	R200KUY1	R250KUY1
Power supply					
Cooling capacity ^{1a/b}	kW	14.5/14.2	22.5/22.2	22.5/22.2	27.1/26.6
Btu/h		49,400/48,400	76,800/75,800	76,800/75,800	92,500/90,800
kcal/h		12,500/12,200	19,400/19,100	19,400/19,100	23,300/22,900
Power consumption ^{1a/b}	kW	5.02/5.02	7.7/7.6	7.7/7.6	9.7/9.7
Indoor unit ³	Colour				
	Decoration panel				
					White
Airflow rate (H)	m³/min	15	19	15	19
	cfm	529	670	529	670
Sound level (H/L) ²	dB(A)	33/29	35/30	33/29	35/30
Dimensions (H×W×D)	Unit	mm	230×840×840	230×840×840	230×840×840
	Decoration panel	mm	40×950×950	40×950×950	40×950×950
	Machine weight	kg	24	24	24
	Decoration panel	kg	5	5	5
Certified operation range	iCWB		14 to 25		
Outdoor unit	Colour		Ivory white		
	Type		Hermetically sealed scroll type		
Compressor					

SPECIFICATIONS

Simultaneous operation system TWIN & TRIPLE & DOUBLE TWIN MULTI

CEILING SUSPENDED TYPE

		71	100	125	140	200	250
Model□ Name	Indoor unit	FHY35BVE × 2	FHY50BVE × 2	FHY60BVE × 2	FHY71BVE × 2	FHY100BVE × 2	FHY125BVE × 2
	Outdoor unit	R71LUV1	R100LUV1	R125LUY1	R140LUY1	R200KUY1	R250KUY1
Power supply		VE: 1 Phase, 220–240/220 V, 50/60 Hz V1: 1 Phase, 220–240 V, 50 Hz Y1: 3 Phase, 380–415 V, 50 Hz					
Cooling capacity ^{1a/1b}	kW	7.8/7.7	10.6/10.5	13.0/12.8	14.5/14.2	22.5/22.2	27.1/26.6
Btu/h		26,600/26,200	36,100/35,700	44,500/43,600	49,400/48,400	76,800/75,800	92,500/90,800
kcal/h		6,700/6,600	9,100/9,000	11,200/11,000	12,500/12,200	19,400/19,100	23,300/22,900
Power consumption ^{1a/1b}	kW	3.20/3.20 (V1) 3.18/3.18 (Y1)	3.95/3.95 (V1) 3.90/3.90 (Y1)	4.98/4.98	5.17/5.17	7.7/7.6	9.7/9.7
Indoor unit ³	Colour	White					
Airflow rate (H)	m ³ /min	13	13	16	17	24	30
	cfm	458	458	564	600	847	1,059
Sound level (H/L) ²	dB(A)	37/32	38/33	38/33	39/35	42/37	44/39
Dimensions (H×W×D)	mm	195×960×680	195×960×680	195×1,160×680	195×1,160×680	195×1,400×680	195×1,590×680
Machine weight	kg	23	24	26	27	32	35
Certified operation range	iCWB	14 to 25					
Outdoor unit	Colour	Ivory white					
Compressor	Type	Hermetically sealed scroll type					
Motor output	kW	2.24	3.00	3.75	4.50	5.5	9.0
Refrigerant charge (R-22)	kg	2.8	3.7	3.7	4.1	5.3	5.7
		(Charged for 30 m)	(Charged for 30 m)	(Charged for 30 m)	(Charged for 30 m)	(Charged for 5 m)	(Charged for 5 m)
Sound level ²	dB(A)	48	49	49	54	60	61
Dimensions (H×W×D)	mm	770×900×320	1,170×900×320	1,170×900×320	1,345×900×320	1,220×1,280×690	1,440×1,280×690
Machine weight	kg	72 (V1), 71 (Y1)	87 (V1), 84 (Y1)	98	109	178	202
Certified operation range	iCDB	21 to 46, -15 to 46 ⁴ (Option installed)					
Piping connections	Liquid (Flare)	mm	ø9.5	ø9.5	ø9.5	ø12.7	ø15.9
	Gas	mm	ø15.9 (Flare)	ø19.1 (Flare)	ø19.1 (Flare)	ø19.1 (Flare)	ø25.4 (Flange)
	Drain	Indoor unit	mm	I.Dø20×O.Dø26	I.Dø20×O.Dø26	I.Dø20×O.Dø26	I.Dø20×O.Dø26
	Outdoor unit	mm	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	—
Max. interunit piping length	m	50 (equivalent length 70 m)					
Max. installation level difference	m	30					
Heat insulation		Both liquid and gas piping					

		140	200	200□	250□		
Model□ Name	Indoor unit	FHY50BVE × 3	FHY71BVE × 3	FHY50BVE × 4	FHY60BVE × 4		
	Outdoor unit	R140LUY1	R200KUY1	R200KUY1	R250KUY1		
Power supply		VE: 1 Phase, 220–240/220 V, 50/60 Hz Y1: 3 Phase, 380–415 V, 50 Hz					
Cooling capacity ^{1a/1b}	kW	14.5/14.2	22.5/22.2	22.5/22.2	27.1/26.6		
Btu/h		49,600/48,400	76,800/75,800	76,800/75,800	92,500/90,800		
kcal/h		12,500/12,200	19,400/19,100	19,400/19,100	23,300/22,900		
Power consumption ^{1a/1b}	kW	5.17/5.17	7.7/7.6	7.7/7.6	9.7/9.7		
Indoor unit ³	Colour	White					
Airflow rate (H)	m ³ /min	13	17	13	16		
	cfm	458	600	458	564		
Sound level (H/L) ²	dB(A)	38/33	39/35	38/33	38/33		
Dimensions (H×W×D)	mm	195×960×680	195×1,160×680	195×960×680	195×1,160×680		
Machine weight	kg	24	27	24	26		
Certified operation range	iCWB	14 to 25					
Outdoor unit	Colour	Ivory white					
Compressor	Type	Hermetically sealed scroll type					
Motor output	kW	4.50	5.5	5.5	9.0		
Refrigerant charge (R-22)	kg	4.1 (Charged for 30 m)	5.3 (Charged for 5 m)	5.3 (Charged for 5 m)	5.7 (Charged for 5 m)		
Sound level ²	dB(A)	54	60	60	61		
Dimensions (H×W×D)	mm	1,345×900×320	1,220×1,280×690	1,220×1,280×690	1,440×1,280×690		
Machine weight	kg	109	178	178	202		
Certified operation range	iCDB	21 to 46, -15 to 46 ⁴ (Option installed)					
Piping connections	Liquid (Flare)	mm	ø9.5	ø12.7	ø12.7	ø15.9	
	Gas	mm	ø19.1 (Flare)	ø25.4 (Flange)	ø25.4 (Flange)	ø28.6 (Flange)	
	Drain	Indoor unit	mm	I.Dø20×O.Dø26	I.Dø20×O.Dø26	I.Dø20×O.Dø26	I.Dø20×O.Dø26
	Outdoor unit	mm	ø26.0 (Hole)	—	—	—	
Max. interunit piping length	m	50 (equivalent length 70 m)					
Max. installation level difference	m	30					
Heat insulation		Both liquid and gas piping					

Note :
Models R200KU and R250KU are recommended for commercial facilities.

¹Rated cooling capacities are based on the following conditions:

²Indoor temp., 27°CDB, 19.5°CWB; outdoor temp. 35°CDB. Equiv. refrigeration piping, 5 m (horizontal).

³Indoor temp., 27°CDB, 19.0°CWB; outdoor temp. 35°CDB. Equiv. refrigeration piping, 5 m (horizontal). (R71LU-R140LU is 7.5 m.)

⁴Anechoic chamber conversion value, measured according to JIS parameters and criteria.

During operation these values are somewhat higher owing to ambient conditions.

⁵Values shown are for a single unit only.

⁶This value is for when year-round cooling kit (option) is installed.

DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE

		200	250	200	
Model□ Name	Indoor unit	FDYM04FAV1 × 2	FDYM05FAV1 × 2	FDYM03FAV1 × 3	
	Outdoor unit	R200KUY1	R250KUY1	R200KUY1	
Power supply		V1: 1 Phase, 220–240 V, 50 Hz Y1: 3 Phase, 380–415 V, 50 Hz			
Cooling capacity ^{1a/1b}		kW	22.5/22.2	27.1/26.6	22.5/22.2
Btu/h			76,800/75,800	92,500/90,800	76,800/75,800
kcal/h			19,400/19,100	23,300/22,900	19,400/19,100
Power consumption ^{1a/1b}		kW	7.7/7.6	9.9/9.9	8.0/7.9
Indoor unit ³	Colour				
Airflow rate (H)	m ³ /min	26	35	20	

SPECIFICATIONS

CEILING MOUNTED CASSETTE TYPE

		35	50	60	71	100	125	140
Model Name	Indoor unit	FHYC35KVE	FHYC50KVE	FHYC60KVE	FHYC71KVE	FHYC100KVE	FHYC125KVE	FHYC140KVE
	Outdoor unit	RY35FV1A	RY50GAV1A	RY60GAV1A	RY71LUV1	RY100LUV1	RY125LUV1	RY140LUV1
Power supply								
VE: 1 Phase 220—240/220 V, 50/60 Hz		V1: 1 Phase 220—240 V, 50 Hz	V1: 3 Phase, 380—415 V, 50 Hz					
Cooling capacity ^{1a/1b}		kW	3.79/3.75	5.27/5.2	6.24/6.15	7.8/7.7	10.5/10.4	13.0/12.8
Btu/h		12,900/12,800	18,000/17,800	21,300/21,000	26,600/26,200	35,700/35,300	44,500/43,600	49,400/48,400
kcal/h		3,260/3,230	4,530/4,470	5,370/5,290	6,700/6,600	9,000/8,900	11,200/11,000	12,500/12,200
Heating capacity ²		kW	4.22	5.8	7.0	7.9	11.2	14.2
Btu/h		14,400	19,800	23,900	27,000	38,100	48,400	56,000
kcal/h		3,630	4,990	6,020	6,800	9,600	12,200	14,000
Power consumption	Cooling ^{1a/1b}	kW	1.51/1.50	1.92/1.91	2.35/2.33	3.01/3.01 (Y1), 2.99/2.99 (Y1)	3.39/3.33 (Y1), 3.38/3.38 (Y1)	4.89/4.89
	Heating ²	kW	1.37	1.68	2.26	2.84 (V1), 2.82 (Y1)	3.64 (V1), 3.60 (Y1)	4.68
Indoor unit		Colour	Unit	Unit	Unit	Unit	Unit	Unit
		Decoration panel	White	White	White	White	White	White
Airflow rate (H)		m³/min	14	15	19	28	33	35
		cfm	494	529	670	988	1,164	1,235
Sound level (H/L) ³		dB(A)	33/29	33/29	35/30	35/30	39/34	44/37
Dimensions (H×W×D)		Unit	mm	230×840×840	230×840×840	230×840×840	288×840×840	288×840×840
		Decoration panel	mm	40×950×950	40×950×950	40×950×950	40×950×950	40×950×950
Machine weight		Unit	kg	24	24	24	28	28
		Decoration panel	kg	5	5	5	5	5
Certified operation range		Cooling	iCWB	14 to 23			12 to 25	
		Heating	iCDB	15 to 28			15 to 27	
Outdoor unit		Colour	Ivory white					
Compressor		Type	Hermetically sealed rotary type	Hermetically sealed scroll type				
		Motor output	kW	1.3	1.7	2.2	2.24	3.00
Refrigerant charge (R-22)		kg	1.12 (Charged for 10 m)	1.55 (Charged for 10 m)	1.75 (Charged for 5 m)	2.8 (Charged for 30 m)	3.7 (Charged for 30 m)	4.1 (Charged for 30 m)
Sound level (Cooling/Heating) ³		dB(A)	47/48	49/51	54/54	48/49	49/52	54/56
Dimensions (H×W×D)		mm	540×750×270	685×800×300	685×880×350	770×900×320	1,170×900×320	1,170×900×320
Machine weight		kg	41	51	75	73 (V1), 72 (Y1)	89 (V1), 86 (Y1)	101
Certified operation range		Cooling	iCDB	19.4 to 46		-5 to 46	-10 to 15	
		Heating	iCWB	-10 to 15.5		-10 to 15		
Piping connections		Liquid (Flare)	mm	ø6.4	ø6.4	ø6.4	ø9.5	ø9.5
		Gas (Flare)	mm	ø12.7	ø15.9	ø15.9	ø15.9	ø19.1
		Drain	Indoor unit	mm	I.D.ø25×O.D.ø32	I.D.ø25×O.D.ø32	I.D.ø25×O.D.ø32	I.D.ø25×O.D.ø32
		Outdoor unit	mm	ø18.0 (Hole)	ø18.0 (Hole)	ø18.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)
Max. interunit piping length		m	20	30			50 (equivalent length 70 m)	
Max. installation level difference		m	15			30		
Heat insulation								Both liquid and gas piping

CEILING SUSPENDED CASSETTE TYPE

		71	100	125
Model Name	Indoor unit	FUY71FJV1	FUY100FJV1	FUY125FJV1
	Outdoor unit	RY71LUV1	RY100LUV1	RY125LUV1
Power supply				
Cooling capacity ^{1a/1b}		kW	7.8/7.7	10.5/10.4
Btu/h		26,600/26,200	35,700/35,300	44,500/43,600
kcal/h		6,700/6,600	9,000/8,900	11,200/11,000
Heating capacity ²		kW	7.9	11.2
Btu/h		27,000	38,100	48,400
kcal/h		6,800	9,600	12,200
Power consumption		Cooling ^{1a/1b}	kW	3.02/3.02 (V1), 3.00/3.00 (Y1)
		Heating ²	kW	2.87 (V1), 2.84 (Y1)
Indoor unit		Colour	Unit	Unit
		Decoration panel	White	White
Airflow rate (H)		m³/min	19	29
		cfm	670	1,023
Sound level (H/L) ³		dB(A)	40/35	43/38
Dimensions (H×W×D)		mm	165×895×895	230×895×895
Machine weight		kg	25	31
Certified operation range		Cooling	iCWB	12 to 25
		Heating	iCDB	15 to 27
Outdoor unit		Colour	Ivory white	Ivory white
Compressor		Type	Hermetically sealed scroll type	Hermetically sealed scroll type
		Motor output	kW	2.24
Refrigerant charge (R-22)		kg	2.8 (Charged for 30 m)	3.7 (Charged for 30 m)
Sound level (Cooling/Heating) ³		dB(A)	48/49	49/52
Dimensions (H×W×D)		mm	770×900×320	1,170×900×320
Machine weight		kg	73 (V1), 72 (Y1)	89 (V1), 86 (Y1)
Certified operation range		Cooling	iCDB	-5 to 46
		Heating	iCWB	-10 to 15
Piping connections		Liquid (Flare)	mm	ø9.5
		Gas (Flare)	mm	ø15.9
		Drain	Indoor unit	mm
		Outdoor unit	mm	I.D.ø20×O.D.ø26
Max. interunit piping length		m	50 (equivalent length 70 m)	50 (equivalent length 70 m)
Max. installation level difference		m	30	30
Heat insulation				Both liquid and gas piping

CEILING SUSPENDED TYPE

		35	50	60	71	100	125
Model Name	Indoor unit	FHY35BVE	FHY50BVE	FHY60BVE	FHY71BVE	FHY100BVE	FHY125BVE</

SPECIFICATIONS

CEILING MOUNTED BUILT-IN TYPE

		35	45	60	71	100	125
Model Name	Indoor unit	FHYB35FV1	FHYB45FV1	FHYB60FV1	FHYB71FV1	FHYB100FV1	FHYB125FV1
	Outdoor unit	RY35FV1A	RY50GAV1A	RY60GAV1A	RY71LUV1	RY100LUV1	RY125LUY1
Power supply							
Cooling capacity ^{1a/1b}		kW	3.5/3.5	5.0/4.85	6.3/6.15	7.8/7.7	10.5/10.4
Btu/h			12,100/11,900	16,900/16,600	21,400/21,000	26,600/26,200	35,700/35,300
kcal/h			3,040/3,000	4,260/4,200	5,390/5,300	6,700/6,600	9,000/8,900
Heating capacity ²		kW	4.1	5.5	7.1	7.9	11.2
Btu/h			14,000	18,800	24,200	27,000	38,100
kcal/h			3,520	4,750	6,100	6,800	9,600
Power consumption		Cooling ^{1a/1b}	kW	1.53/1.52	1.97/1.96	2.91/2.89	3.07/3.07 (V1), 3.05/3.05 (Y1)
		Heating ²	kW	1.34	1.92	2.71	3.06 (V1), 3.03 (Y1)
Indoor unit		Colour	Unit				
		Decoration panel					
Airflow rate (H)		m³/min	11.5	14	17	19	27
		cfm	405	494	600	670	953
Sound level (H/L) ³		dB(A)	38/32	39/34	41/35	41/35	44/38
Dimensions (H×W×D)		Unit	mm	300×700×800	300×700×800	300×1,000×800	300×1,400×800
		Decoration panel	mm	55×880×500	55×880×500	55×1,100×500	55×1,500×500
Machine weight		Unit	kg	30	31	41	51
		Decoration panel	kg	3.5	3.5	4.5	4.5
Certified operation range		Cooling	iCWB	14 to 23		12 to 25	
		Heating	iCDB	15 to 28		15 to 27	
Outdoor unit		Colour					Ivory white
		Compressor	Type	Hermetically sealed rotary type		Hermetically sealed scroll type	
		Motor output	kW	1.3	1.7	2.2	2.24
			kg	1.12	1.55	1.75	2.24
Refrigerant charge (R-22)		kg	(Charged for 10 m)	(Charged for 10 m)	(Charged for 5 m)	(Charged for 30 m)	(Charged for 30 m)
Sound level (Cooling/Heating) ³		dB(A)	47/48	49/51	54/54	48/49	49/52
Dimensions (H×W×D)		mm	540×750×270	685×800×300	685×880×350	770×900×320	1,170×900×320
Machine weight		kg	41	51	75	73 (V1), 72 (Y1)	89 (V1), 86 (Y1)
Certified operation range		Cooling	iCDB	19.4 to 46		-5 to 46	-5 to 46
		Heating	iCWB	-10 to 15.5		-10 to 15	-10 to 15
Piping connections		Liquid (Flare)	mm	ø6.4	ø6.4	ø6.4	ø9.5
		Gas (Flare)	mm	ø12.7	ø15.9	ø15.9	ø19.1
		Drain	Indoor unit	mm	I.D.ø25×O.D.ø32	I.D.ø25×O.D.ø32	I.D.ø25×O.D.ø32
			Outdoor unit	mm	ø18.0 (Hole)	ø18.0 (Hole)	ø26.0 (Hole)
Max. interunit piping length		m	20	30		50 (equivalent length 70 m)	
Max. installation level difference		m		15		30	
Heat insulation							

WALL MOUNTED TYPE

		71	100
Model Name	Indoor unit	FAY71LVE	FAY100FAVE
	Outdoor unit	RY71LUV1	RY100LUV1
Power Supply			
Cooling capacity ^{1a/1b}		kW	7.8/7.7
		Btu/h	26,600/26,200
		kcal/h	6,700/6,600
Heating capacity ²		kW	7.9
		Btu/h	27,000
		kcal/h	6,800
Power consumption		Cooling ^{1a/1b}	kW
		Heating ²	kW
Indoor unit		Colour	
		Airflow rate (H)	m³/min
			19
		cfm	670
		Sound level (H/L) ³	dB(A)
			43/37
Dimensions (H×W×D)		mm	290×1,050×230
Machine weight		kg	13
Certified operation range		Cooling	iCWB
		Heating	iCDB
		12 to 25	15 to 27
Outdoor unit		Colour	Ivory white
		Compressor	Type
		Motor output	kW
			2.24
Refrigerant charge (R-22)		kg	2.8 (Charged for 30 m)
Sound level (Cooling/Heating) ³		dB(A)	48/49
Dimensions (H×W×D)		mm	770×900×320
Machine weight		kg	73 (V1), 72 (Y1)
Certified operation range		Cooling	iCDB
		Heating	iCWB
		-5 to 46	-10 to 15
Piping connections		Liquid (Flare)	mm
		Gas (Flare)	mm
		Drain	Indoor unit
			mm
		Outdoor unit	mm
Max. interunit piping length		m	50 (equivalent length 70 m)
Max. installation level difference		m	30
Heat insulation		Both liquid and gas piping	

Note : ¹Rated cooling capacities are based on the following conditions:

(FHYB) ^{1a}Suction temp., 27°CDB, 19.5°CWB; outdoor temp. 35°CDB. Equiv. refrigeration piping, 5 m (horizontal).

^{1b}Suction temp., 27°CDB, 19.0°CWB; outdoor temp. 35°CDB. Equiv. refrigeration piping, 5 m (horizontal). (RY71LU-RY125LU is 7.5 m.)

(FAY) ^{1a}Indoor temp., 27°CDB, 19.5°CWB; outdoor temp. 35°CDB. Equiv. refrigeration piping, 5 m (horizontal).

^{1b}Indoor temp., 27°CDB, 19.0°CWB; outdoor temp. 35°CDB. Equiv. refrigeration piping, 7.5 m (horizontal).

²Rated heating capacities are based on the following conditions:

(FHYB) Suction temp., 20°CDB; outdoor temp., 7°CDB, 6°CWB. Equiv. refrigeration piping, 5 m (horizontal). (RY71LU-RY125LU is 7.5 m.)

(FAY) Indoor temp., 20°CDB; outdoor temp., 7°CDB, 6°CWB. Equiv. refrigeration piping, 7.5 m (horizontal).

³Anechoic chamber conversion value, measured according to JIS parameters and criteria.

During operation these values are somewhat higher owing to ambient conditions.

FLOOR STANDING TYPE

		71	100	125
Model Name	Indoor unit	FVY71LAVE	FVY100LAVE	FVY125LAVE
	Outdoor unit	RY71LUV1	RY100LUV1	RY125LUV1
VE: 1 Phase, 220–240/220 V, 50/60 Hz				
Cooling capacity ^{1a/1b}		kW	7.8/7.7	10.5/10.4
		Btu/h	26,600/26,200	35,700/35,300

SPECIFICATIONS

DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE

		71	100	125	140	
Model Name	Indoor unit	FDY03FAV1	FDY04FAV1	FDY05FAV1	FDY06FAV1	
	Outdoor unit	RY71LUV1	RY100LUV1	RY125LUY1	RY140LUY1	
		V1: 1 Phase, 220–240 V, 50 Hz Y1: 3 Phase, 380–415 V, 50 Hz				
Power supply		kW	7.8/7.7	10.5/10.4	13.0/12.8	
Cooling capacity ^{1a/1b}		Btu/h	26,600/26,200	35,700/35,300	44,500/43,600	
		kcal/h	6,700/6,600	9,000/8,900	11,200/11,000	
Heating capacity ²		kW	7.9	11.2	14.2	
		Btu/h	27,000	38,100	48,400	
		kcal/h	6,800	9,600	12,200	
Power consumption		Cooling ^{1a/1b}	kW	3.19/3.19 (V1), 3.17/3.17 (Y1)	4.00/4.00 (V1), 3.95/3.95 (Y1)	
		Heating ²	kW	2.95 (V1), 2.92 (Y1)	3.91 (V1), 3.86 (Y1)	
Indoor unit	Colour					
	Fan	Airflow rate (H)	m³/min	20	26	
			cfm	706	917	
		External static pressure	Pa(mH ₂ O)	98 (10)	98 (10)	
		Sound level (H) ³	dB(A)	39	39	
		Dimensions (H×W×D)	mm	295×1,100×680	295×1,500×680	
		Machine weight	kg	42	56	
	Certified operation range	Cooling	°CWB	12 to 25		
		Heating	°CDB	15 to 27		
Outdoor unit	Colour				Ivory white	
	Compressor	Type		Hermetically sealed scroll type		
		Motor output	kW	2.24	3.00	3.75
		Refrigerant charge (R-22)	kg	2.8 (Charged for 30 m)	3.7 (Charged for 30 m)	4.1 (Charged for 30 m)
		Sound level (Cooling/Heating) ³	dB(A)	48/49	49/52	49/52
		Dimensions (H×W×D)	mm	770×900×320	1,170×900×320	1,170×900×320
		Machine weight	kg	73 (V1), 72 (Y1)	89 (V1), 86 (Y1)	101
	Certified operation range	Cooling	°CDB	-5 to 46		
		Heating	°CWB	-10 to 15		
Piping connections	Liquid (Flare)	mm	ø9.5	ø9.5	ø9.5	ø9.5
	Gas (Flare)	mm	ø15.9	ø19.1	ø19.1	ø19.1
	Drain	Indoor unit	mm	I.Dø25×O.Dø32	I.Dø25×O.Dø32	I.Dø25×O.Dø32
		Outdoor unit	mm	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)
	Max. interunit piping length		m	50 (equivalent length 70 m)		
	Max. installation level difference		m	30		
	Heat insulation			Both liquid and gas piping		

DUCT CONNECTION HIGH STATIC PRESSURE TYPE

		140	200	250	400	500
Model Name	Indoor unit	FDY06KAY1	FDY08KAY1	FDY10KAY1	FDY15KAY1	FDY20KAY1
	Outdoor unit	RY140LUY1	RY200KUY1	RY250KUY1	RY200KUY1×2	RY250KUY1×2
		Y1: 3 phase, 380–415 V (4 wires), 50 Hz				
Power supply		kW	14.5/14.2	22.5/22.2	27.6/27.1	44.0/43.5
Cooling capacity ^{1a/1b}		Btu/h	49,500/48,500	76,800/75,700	94,200/92,500	150,000/148,000
		kcal/h	12,500/12,220	19,300/19,100	23,700/23,300	37,800/37,400
Heating capacity ²		kW	15.3	23.2	29.5	44.8
		Btu/h	52,200	79,200	100,700	153,000
		kcal/h	13,200	20,000	25,400	38,500
Power consumption		Cooling ^{1a/1b}	kW	5.14/5.14	7.2/7.1	9.3/9.2
		Heating ²	kW	4.54	6.1	8.8
Indoor unit	Colour					
	Airflow rate (H)	m³/min	52	68	83	136
		cfm	1,835	2,400	2,929	4,800
	Fan	External static pressure	Pa(mH ₂ O)	108 (11)	118 (12)	147 (15)
		Driving system		Belt drive		
		Sound level (H) ³	dB(A)	51	53	58
		Dimensions(H×W×D) ⁵	mm	450×1,130×850	500×1,130×850	500×1,330×850
		Machine weight	kg	80	94	105
	Certified operation range	Cooling	°CWB	12 to 25	14 to 25	
		Heating	°CDB	15 to 27		
Outdoor unit	Colour				Ivory white	
	Compressor	Type		Hermetically sealed scroll type		
		Motor output	kW	4.5	5.5	9.0
		Refrigerant charge (R-22)	kg	4.1 (Charged for 30 m)	4.0 (Charged for 5 m)	5.5 (Charged for 5 m)
		Sound level (Cooling/Heating) ³	dB(A)	54/56	60/62	61/63
		Dimensions (H×W×D)	mm	1,345×900×320	1,220×1,280×690	1,440×1,280×690
		Machine weight	kg	112	180	206
	Certified operation range	Cooling	°CDB	-5 to 46	0 to 50	0 to 50
		Heating	°CWB	-10 to 15	-10 to 15	-10 to 15
Piping connections	Liquid (Flare)	mm	ø9.5	ø12.7	ø15.9	ø12.7×2
	Gas	mm	ø19.1 (Flare)	ø25.4 (Flange)	ø28.6 (Flange)	ø28.6×2 (Flange)
	Drain	Indoor unit	mm	3/4B		1B
		Outdoor unit	mm	ø26.0 (Hole)		
	Max. interunit piping length		m	50 (equivalent length 70 m)		
	Max. installation level difference		m	30		
	Heat insulation			Both liquid and gas piping		

Note : Models RY200KU and RY250KU are recommended for commercial facilities.

^{1a}Rated cooling capacities are based on the following conditions:

^{1b}Suction temp., 27°CDB, 19.5°CWB; outdoor temp., 35°CDB. Equiv. refrigeration piping, 5 m (horizontal).

^{1b}Suction temp., 27°CDB, 19.0°CWB; outdoor temp., 35°CDB. Equiv. refrigeration piping, 5 m (horizontal). (RY71LU-RY140LU is 7.5 m.)

²Rated heating capacities are based on the following conditions:

³Suction temp., 20°CDB; outdoor temp., 7°CDB, 6°CWB. Equiv. refrigeration piping, 5 m (horizontal). (RY71LU-RY140LU is 7.5 m.)

⁴Anechoic chamber conversion value, measured according to JIS parameters and criteria. During operation these values are somewhat higher owing to ambient conditions.

⁵Specification for outdoor unit is for a single unit only.

⁶Without control box.

SPECIFICATIONS

Simultaneous operation system
TWIN & TRIPLE & DOUBLE TWIN MULTI

CEILING MOUNTED CASSETTE TYPE

		71	100	125	140	200	250
Model Name	Indoor unit	FHYC35KVE×2	FHYC50KVE×2	FHYC60KVE×2	FHYC71KVE×2	FHYC100KVE×2	FHYC125KVE×2
	Outdoor unit	RY71LUV1	RY100LUV1	RY125LUY1	RY140LUY		

SPECIFICATIONS

Simultaneous operation system TWIN & TRIPLE & DOUBLE TWIN MULTI

CEILING SUSPENDED TYPE

		71	100	125	140	200	250		
Model Name	Indoor unit	FHY35BVE x 2	FHY50BVE x 2	FHY60BVE x 2	FHY71BVE x 2	FHY100BVE x 2	FHY125BVE x 2		
	Outdoor unit	RY71LUY1	RY100LUY1	RY125LUY1	RY140LUY1	RY200KUY1	RY250KUY1		
Power supply									
Cooling capacity ^{1a/1b}	kW	7.8/7.7	10.5/10.4	13.0/12.8	14.5/14.2	22.5/22.2	27.1/26.6		
	Btu/h	26,600/26,200	35,700/35,300	44,500/43,600	49,400/48,400	76,800/75,800	92,500/90,800		
	kcal/h	6,700/6,600	9,000/8,900	11,200/11,000	12,500/12,200	19,400/19,100	23,300/22,900		
Heating capacity ²	kW	7.9	11.2	14.2	16.3	22.7	28.4		
	Btu/h	27,000	38,100	48,400	56,000	77,500	97,000		
	kcal/h	6,800	9,600	12,200	14,000	19,500	24,400		
Power consumption	Cooling ^{1a/1b}	kW	3.14/3.14 (V1) 3.12/3.12 (Y1)	3.87/3.87 (V1) 3.82/3.82 (Y1)	4.91/4.91	5.10/5.10	7.77.6		
	Heating ²	kW	3.08 (V1), 3.05 (Y1)	3.74 (V1), 3.69 (Y1)	4.83	4.99	6.5		
							9.2		
Indoor unit ³	Colour		White						
	Airflow rate (H)	m ³ /min	13	13	16	17	24		
		cfm	458	458	564	600	847		
Sound level (H/L) ⁴	dB(A)	37/32	38/33	38/33	39/35	42/37	44/39		
	Dimensions (H×W×D)	mm	195×960×680	195×960×680	195×1,160×680	195×1,160×680	195×1,400×680		
	Machine weight	kg	23	24	26	27	32		
Certified operation range	Cooling	°CWB	12 to 25			14 to 25			
	Heating	°CDB	15 to 27			15 to 27			
Outdoor unit	Colour		Ivory white						
	Compressor	Type	Hermetically sealed scroll type						
		Motor output	kW	2.24	3.00	3.75	4.50		
Refrigerant charge (R-22)	kg		2.8	3.7	3.7	4.1	5.5		
		(Charged for 30 m)	(Charged for 30 m)	(Charged for 30 m)	(Charged for 30 m)	(Charged for 5 m)	(Charged for 5 m)		
Sound level (Cooling/Heating) ⁴	dB(A)	48/49	49/52	49/52	54/56	60/62	61/63		
	Dimensions (H×W×D)	mm	770×900×320	1,170×900×320	1,170×900×320	1,345×900×320	1,220×1,280×690		
	Machine weight	kg	73 (V1), 72 (Y1)	89 (V1), 86 (Y1)	101	112	180		
Certified operation range	Cooling	°CDB	-5 to 46			0 to 50			
	Heating	°CWB	-10 to 15			-10 to 15			
Piping connections	Liquid (Flare)	mm	ø9.5	ø9.5	ø9.5	ø9.5	ø12.7		
	Gas	mm	ø15.9 (Flare)	ø19.1 (Flare)	ø19.1 (Flare)	ø19.1 (Flare)	ø25.4 (Flange)		
	Drain	Indoor unit	mm	I.Dø20×O.Dø26	I.Dø20×O.Dø26	I.Dø20×O.Dø26	I.Dø20×O.Dø26		
Max. interunit piping length	Indoor unit	mm	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	ø26.0 (Hole)	—		
	Outdoor unit	mm	—	—	—	—	—		
			50 (equivalent length 70 m)						
Max. installation level difference	m		30						
	Heat insulation		Both liquid and gas piping						

DUCT CONNECTION LOW STATIC PRESSURE TYPE

		200	200	250
Model Name	Indoor unit	FDYB50KAVE x 4	FDYB71KAVE x 3	FDYB60KAVE x 4
Outdoor unit		RY200KUY1	RY200KUY1	RY250KUY1
Power supply				
Cooling capacity ^{1a/1b}	Cooling capacity ^{1a/1b}	kW	22.5/22.2	22.5/22.2
		Btu/h	76,800/75,800	76,800/75,800
		kcal/h	19,400/19,100	19,400/19,100
Heating capacity ²	Heating capacity ²	kW	22.7	22.7
		Btu/h	77,500	77,500
		kcal/h	19,500	19,500
Power consumption	Cooling ^{1a/1b}	kW	7.7/7.6	7.7/7.6
	Heating ²	kW	6.5	6.5
			—	9.2
Indoor unit ³	Colour		White	
	Airflow rate (H)	m ³ /min	13	18
		cfm	458	635
Fan External static pressure	External static pressure	Pa(mH ₂ O)	20 (2)	
	Sound level (H)	dB(A)	41	43
	Dimensions (H×W×D)	mm	260×900×580	260×1,300×580
Machine weight	Machine weight	kg	23	31
	Certified operation range	Cooling	°CWB	14 to 25
	Heating	°CDB	°CWB	15 to 27
Outdoor unit	Colour		Ivory white	
	Compressor	Type	Hermetically sealed scroll type	
		Motor output	kW	5.5
Refrigerant charge (R-22)	Refrigerant charge (R-22)	kg	4.0 (Charged for 5 m)	4.0 (Charged for 5 m)
				5.5 (Charged for 5 m)
Sound level (Cooling/Heating) ⁴	Sound level (Cooling/Heating) ⁴	dB(A)	60/62	60/62
	Dimensions (H×W×D)	mm	1,220×1,280×690	1,220×1,280×690
	Machine weight	kg	180	180
Certified operation range	Cooling	°CDB	0 to 50	0 to 50
	Heating	°CWB	—	—
Piping connections	Liquid	mm	ø12.7 (Flare)	ø12.7 (Flare)
	Gas	mm	ø25.4 (Flange)	ø25.4 (Flange)
	Drain	Indoor unit	mm	—
Max. interunit piping length	Indoor unit	mm	—	3/4B
	Outdoor unit	mm	—	—
				50 (equivalent length 70 m)
Max. installation level difference	m		30	
	Heat insulation		Both liquid and gas piping	

DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE

		200	250	200
Model Name	Indoor unit	FDYMO4FAV1 x 2	FDYMO5FAV1 x 2	FDYMO3FAV1 x 3
Outdoor unit		RY200KUY1	RY250KUY1	RY200KUY1
Power supply				
Cooling capacity ^{1a/1b}	Cooling capacity ^{1a/1b}	kW	22.5/22.2	27.1/26.6
		Btu/h	76,800/75,800	92,500/90

OPTIONS

Indoor unit

CEILING MOUNTED CASSETTE TYPE

Name of option	Remark	Kit name			
		Cooling only		Heat pump	
		FHC35K/50K/60K FYHC35K/50K/60K/71K	FHYC100K/125K/140K	FHYC35K/50K/60K/71K	FHYC100K/125K/140K
Decoration panel		BYC125K-W1		BYC125K-W1	
Sealing member for air discharge outlet		KDBHJ55K160		KDBHJ55K160	
Panel spacer		KDBP55H160WA		KDBP55H160WA	
Fresh air intake kit ¹	Chamber type	KDDP55D160		KDDP55D160	
	Without the T-joint pipe and fan	KDDP55D160		KDDP55D160	
	With the T-joint pipe, without fan	KDDP55D160K		KDDP55D160K	
Direct installation type		KDDJ55X160		KDDJ55X160	
Chamber connection kit ²		KKSJ55K160		KKSJ55K160	
High-efficiency filter	(Colorimetric method 65%)	KAFP556D80	KAFP556D160	KAFP556D80	KAFP556D160
	(Colorimetric method 90%)	KAFP557D80	KAFP557D160	KAFP557D80	KAFP557D160
Replacement high-efficiency filter	(Colorimetric method 65%)	KAFP552H80	KAFP552H160	KAFP552H80	KAFP552H160
	(Colorimetric method 90%)	KAFP553H80	KAFP553H160	KAFP553H80	KAFP553H160
High-efficiency filter chamber		KDDFP55D160		KDDFP55D160	
Replacement long-life filter		KAFJ55K160		KAFJ55K160	
Ultra long-life filter		KAFP55D160		KAFP55D160	
Replacement ultra long-life filter		KAFJ55K160H		KAFJ55K160H	
Branch duct chamber		KDJ55K80	KDJ55K160	KDJ55K80	KDJ55K160
Remote controller	Wired type ³	BRC1C61		BRC1C61	
	Wireless type	BRC7C613W		BRC7C612W	
Wired LCD remote controller with weekly schedule timer		BRC1D61		BRC1D61	
Central remote controller ⁴		DCS302CA61		DCS302CA61	
Unified ON/OFF controller ⁴		DCS301BA61		DCS301BA61	
Schedule timer ⁴		DST301BA61		DST301BA61	
intelligent Touch Controller ⁴		DCS601C51		DCS601C51	
Adaptor for wiring ⁵		KRP1BA57		KRP1BA57	
Wiring adaptor for electrical appendices ⁵		KRP4AA53		KRP4AA53	
Interface adaptor for SkyAir series		DTA102A52		DTA102A52	
Installation box for adaptor PCB		KRP1B98		KRP1B98	

Note:
¹Refer to page 14 for the details.
²Required for installing high-efficiency or ultra long-life filter.
³Wiring for wired remote controller to be procured locally.
⁴This optional accessory requires DTA102A52.
⁵Installation box for adaptor PCB (KRP1B98) is necessary.

CEILING SUSPENDED TYPE

Name of option	Remark	Kit name			
		Cooling only		Heat pump	
		FH(Y)35B	FH(Y)50B	FHY160B	FHY71B
Replacement long-life filter	Resin net	KAFJ501D56	KAFJ501D80	KAFJ501D112	KAFJ501D160
Drain-up kit		KDU50B50VE	KDU50B71VE	KDU50B125VE	KDU50B50VE
L-type piping kit (for upward direction)		KHFJ5F50	KHFJ5F60	KHFJ5F80	KHFJ5F160
Remote controller	Wired type ¹	BRC1C61		BRC1C61	
	Wireless type	BRC7EA66		BRC7E63W	
Wired LCD remote controller with weekly schedule timer		BRC1D61		BRC1D61	
Central remote controller ²		DCS302CA61		DCS302CA61	
Unified ON/OFF controller ²		DCS301BA61		DCS301BA61	
Schedule timer ²		DST301BA61		DST301BA61	
intelligent Touch Controller ²		DCS601C51		DCS601C51	
Adaptor for wiring		KRP1BA54		KRP1BA54	
Wiring adaptor for electrical appendices ³		KRP4AA52		KRP4AA52	
Interface adaptor for SkyAir series		DTA102A52		DTA102A52	
Installation box for adaptor PCB		KRP1CA93		KRP1CA93	

Note:
¹Wiring for wired remote controller to be procured locally.
²This optional accessory requires DTA102A52.
³Installation box for adaptor PCB (KRP1CA93) is necessary.

CEILING SUSPENDED CASSETTE TYPE

Name of option	Remark	Kit name			
		Cooling only		Heat pump	
		FUY71FJ	FUY100FJ/125FJ	FUY71FJ	FUY100FJ/125FJ
Replacement long-life filter		KAFJ495F140		KAFJ495F140	
Sealing member for air discharge outlet ¹		KDBHJ49F80	KDBHJ49F140	KDBHJ49F80	KDBHJ49F140
Decoration panel for air discharge		KDBTJ49F80	KDBTJ49F140	KDBTJ49F80	KDBTJ49F140
Vertical flap kit		KDGJ49F80	KDGJ49F140	KDGJ49F80	KDGJ49F140
L-connection piping kit		KHFJ49F80	KHFJ49F140	KHFJ49F80	KHFJ49F140
Remote controller	Wired type ²	BRC1C61		BRC1C61	
	Wireless type	BRCTC529W		BRCTC528W	
Wired LCD remote controller with weekly schedule timer		BRCTC61		BRCTC61	
Central remote controller ³		DCS302CA61		DCS302CA61	
Unified ON/OFF controller ³		DCS301BA61		DCS301BA61	
Schedule timer ³		DST301BA61		DST301BA61	
intelligent Touch Controller ³		DCS601C51		DCS601C51	
Wiring adaptor for electrical appendices ⁴		KRP4AA53		KRP4AA53	
Interface adaptor for SkyAir series		DTA102A52		DTA102A52	
Installation box for adaptor PCB		KRP1B97		KRP1B97	

Note:
¹Required at time of installation for setting two-way opposing air flow.
²Wiring for wired remote controller to be procured locally.
³This optional accessory requires DTA102A52.
⁴Installation box for adaptor PCB (KRP1B97) is necessary.

CEILING MOUNTED CASSETTE CORNER TYPE

Name of option	Remark	Kit name			
		Cooling only		Heat pump	
Decoration panel		BYK45FJW1		BYK45FJW1	
Panel spacer		KPB52F56W		KPB52F56W	
Air discharge blind panel		KDBJ52F56W		KDBJ52F56W	
Replacement long-life filter	Resin net	KAFJ521F56		KAFJ521F56	
Discharge grille		K-HV7AW		K-HV9AW	
Flexible duct with shutter		KFDJ52F56		KFDJ52F80	
Remote controller	Wired type ¹	BRC1C61		BRC1C61	
Wired LCD remote controller with weekly schedule timer		BRC1D61		BRC1D61	
Central remote controller ²		DCS302CA61		DCS302CA61	
Unified ON/OFF controller ²		DCS301BA61		DCS301BA61	
Schedule timer ²		DST301BA61		DST301BA61	
intelligent Touch Controller ²		DCS601C51		DCS601C51	
Adaptor for wiring (interlock for fresh air intake fan)		KRP1B51		KRP1B51	
Wiring adaptor for electrical appendices		KRP4AA51		KRP4AA51	
Interface adaptor for SkyAir series		DTA102A52		DTA102A52	

Note: ¹Wiring for wired remote controller to be procured locally.

²This optional accessory requires DTA102A52.

CEILING MOUNTED BUILT-IN TYPE

Name of option	Remark	Kit name			
		Cooling only		Heat pump	
FHB35F/45F		FHB60F/FHYB71F		FHYB100F	
		FHYB125F		FHYB60F/71F	
		FHYB100F		FHYB100F	
		FHYB125F		FHYB125F	
Decoration panel		BYBS45DJW1		BYBS71DJW1	
Service access panel		KTBJ25K56W		KTBJ25K80W	
High-efficiency filter	(Colorimetric method 65%)	KAFJ25L56	KAFJ25L80		

OPTIONS

Indoor unit

DUCT CONNECTION TYPE

Name of option	Remark	Low static pressure type		Middle static pressure type		High static pressure type	
		Cooling only	Heat pump	Cooling only	Heat pump	Cooling only	Heat pump
FDBG25A/ 35A/50A	FDBG60A/ 71A	FDB35KA/ 50KA	FDYB60KA/ 71KA	FDMG71A/ 100A/125A/ 140A/180A	FDYMO3FA/ 04FA/05FA/ 06FA	FDYMO3FA/ 04K/05K/ 06K/08K/ 10K	FDY06KA/08KA/ 10KA/15KA/20KA
Wired LCD remote controller with weekly schedule timer	—	BRC1D61	—	BRC1D61	BRC1D61	—	BRC1D61
Remote controller	KRC47-1A	—	—	KRC47-1A	—	KRC47-3A/ KRC17-2B ⁵	—
Wired LCD remote controller	—	BRC1C61	—	BRC1C61	BRC1C61	—	BRC1C61
Digital remote controller	KRC47-2A	—	—	KRC47-2A	—	—	—
Digital remote controller for duct heater use	KRC47-4A	—	—	KRC47-4A	—	—	—
Wireless remote controller	—	BRC4C62	—	BRC4C64	BRC4C62	—	BRC4C62
Central remote controller	—	DCS302CA61 ¹	—	DCS302CA61 ¹	DCS302CA61 ¹	DCS302CA61 ²	DCS302CA61 ¹
Unified ON/OFF controller	—	DCS301BA61 ¹	—	DCS301BA61 ¹	DCS301BA61 ¹	DCS301BA61 ²	DCS301BA61 ¹
Schedule timer	—	DST301BA61 ¹	—	DST301BA61 ¹	DST301BA61 ¹	DST301BA61 ²	DST301BA61 ¹
intelligent Touch Controller	—	DCS601C51 ¹	—	DCS601C51 ¹	DCS601C51 ²	DCS601C51 ¹	DCS601C51 ¹
Remote sensor (for indoor temperature)	—	—	—	—	KRC501-1B	—	—
Central control adaptor kit	—	—	—	—	DTA107A55	—	—
Adaptor for wiring	—	KRP1BA54	—	—	—	KRP1BA57 ³	—
Wiring adaptor for electrical appendices	—	KRP4AA52 ³	—	KRP4AA51 ⁴	KRP4AA51 ⁴	—	KRP4AA53 ³
Switch box for adaptor kit	—	KRP1B100	—	—	—	—	—
Interface adaptor for SkyAir series	—	DTA102A52	—	DTA102A52	DTA102A52	—	DTA102A52
Installation box for adaptor PCB	—	—	—	—	—	KRP1B100	—
Suction grille	KDGF19A45	KDGF19A71	KDGF19A45	KDGF19A71	—	—	—
Drain pan cover	KKD19A1	KKD19A1	—	—	—	—	—

Note:

¹This optional accessory requires DTA102A52.

²This optional accessory requires DTA107A55.

³This optional accessory requires KRP1B100.

⁴Installation plate for adaptor PCB (KRP4A95) is necessary.

⁵In case of using KRC17-2B or field supplied remote controller, 3-Minutes Timer (field supplied) is required.

intelligent Controller

New communication functions in the user-friendly icon based multilingual controller simplify centralised control of the system

Powerful Functions


- Special Function 1** Doubling of number of connectable indoor unit by adding a DI-III-NET PLUS adaptor (Optional)
- Special Function 2** Support for centralised control from elsewhere, using a PC with a Web browser (Optional)
- Special Function 3** Sending of e-mail alerts to a specified address when malfunctions occur (Optional)
- Special Function 4** Built-in Ethernet port for connecting to the Internet or an intranet
- Special Function 5** Simple interlock function

- Yearly schedule
- Power proportional distribution* (option)
- Auto cool/heat change-over
- Temperature Limitation

- Cost Performance
- Labor saving • Overall energy savings
- Simplified BMS

- Simple Operation
- Colour LCD • Touch panel • Icon display
- Multilingual (English, French, German, Spanish, Italian, or Chinese)

* Limitations apply to some models and functions.
For details please contact your local sales office.

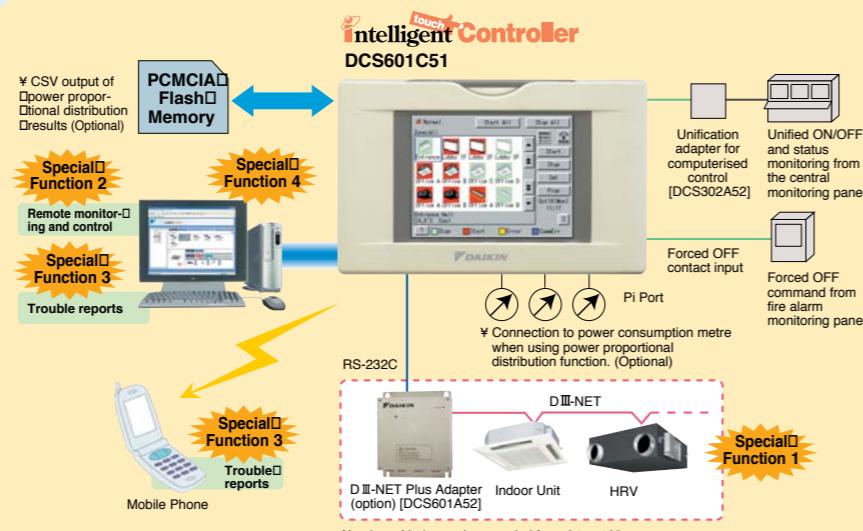

Necessary for optional interface adaptor for SkyAir series (DTA112BA51) with the Intelligent Touch Controller.

Outdoor unit


Name of option	Remark	Kit name									
		Cooling only				Heat pump					
R25J/ R35J	R35GD/ R50GD/ R60G	R71FUD/ R100FUD/ R125FUD	RG71AO/ RG140AO/ RG180A	R71LU	R100LU/ R125LU	R140LU	RY35FD/ RY60GD(A)	RY50G(A)/ RY60G(A)	RY71LU	RY100LU/ RY125LU	RY140LU
Drain piping kit	—	KIS95	—	—	—	KIS95	—	—	—	—	—
Central drain plug	—	—	—	KKPJ5F180	—	—	—	—	KKPJ5F180	—	—
Air direction adjustment grille	KPW937A4	—	—	—	—	—	—	—	—	—	—
Drain plug	KKP937A4 ¹	—	—	—	—	—	—	—	—	—	—
Refrigerant branch piping	For twin multi	—	—	KHR58C21	KHD58C21A	—	KHR58C21	KHD58C21A	—	—	—
	For triple multi	—	—	—	—	KHD58D33	—	—	—	KHD58D33	—
Year-round cooling kit	—	—	—	KRK5F80V1	KRK5F140V1	KRK5F160V1	—	—	—	—	—

Note: ¹One set includes 5 pieces for 5units.


Name of option	Remark	Kit name			
		Cooling only		Heat pump	
R200KU	R250KU	RY200KU	RY250KU		
Refrigerant branch piping	For twin multi	KHD58C23A	KHD58C24A	KHD58C23A	KHD58C24A
	For triple multi	KHR58P322H	—	KHR58P322H	—
	For double twin multi	KHRJ5F224F	KHRJ5F280F	KHRJ5F224F	KHRJ5F280F

DIMENSIONS (Unit: mm)

CEILING MOUNTED CASSETTE TYPE

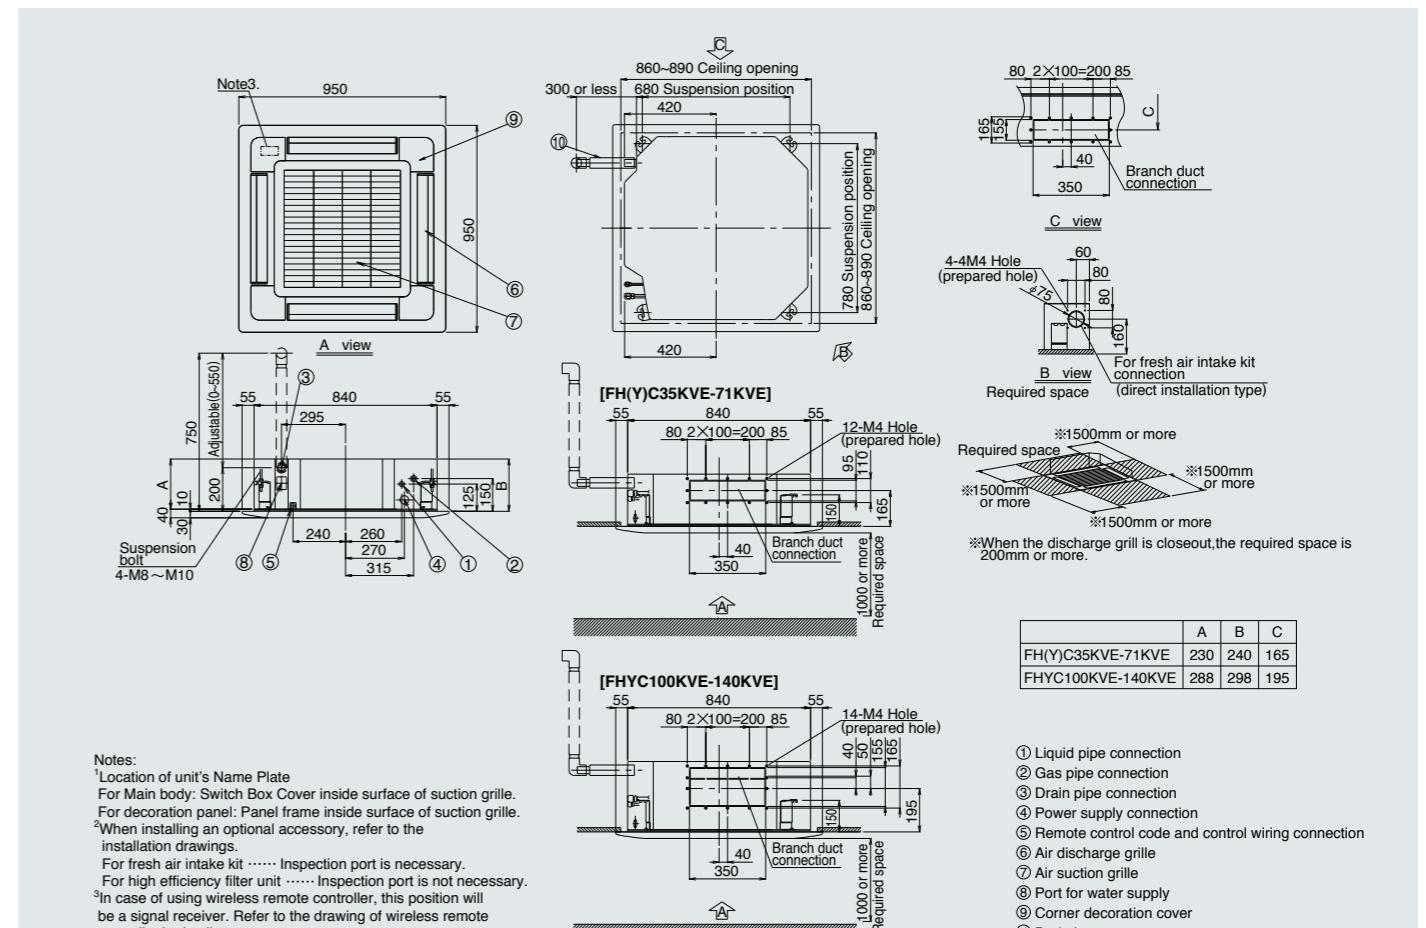


CEILING SUSPENDED TYPE

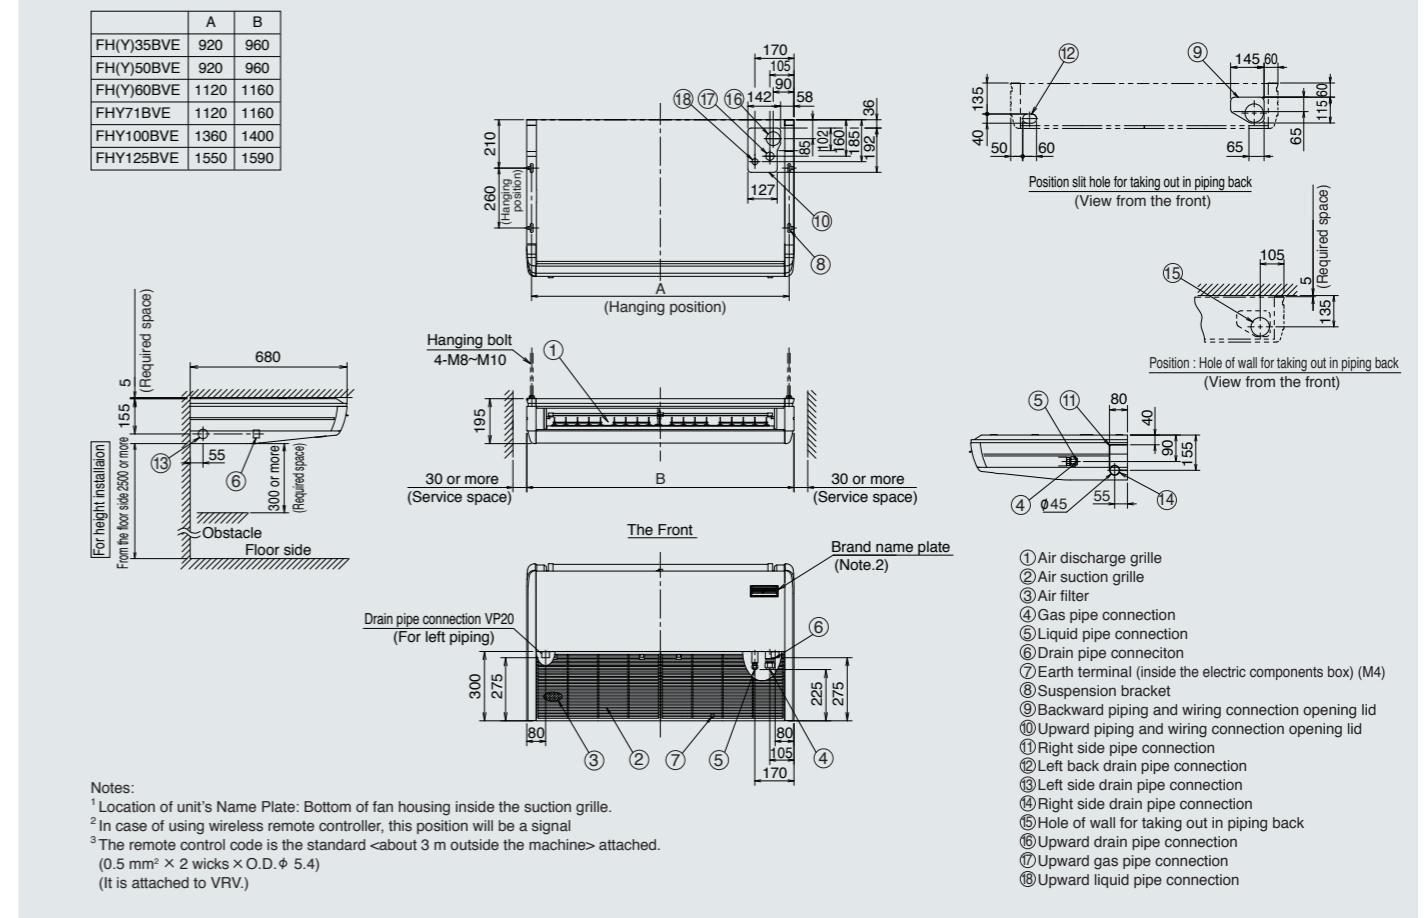


DIMENSIONS (Unit: mm)


CEILING SUSPENDED CASSETTE TYPE

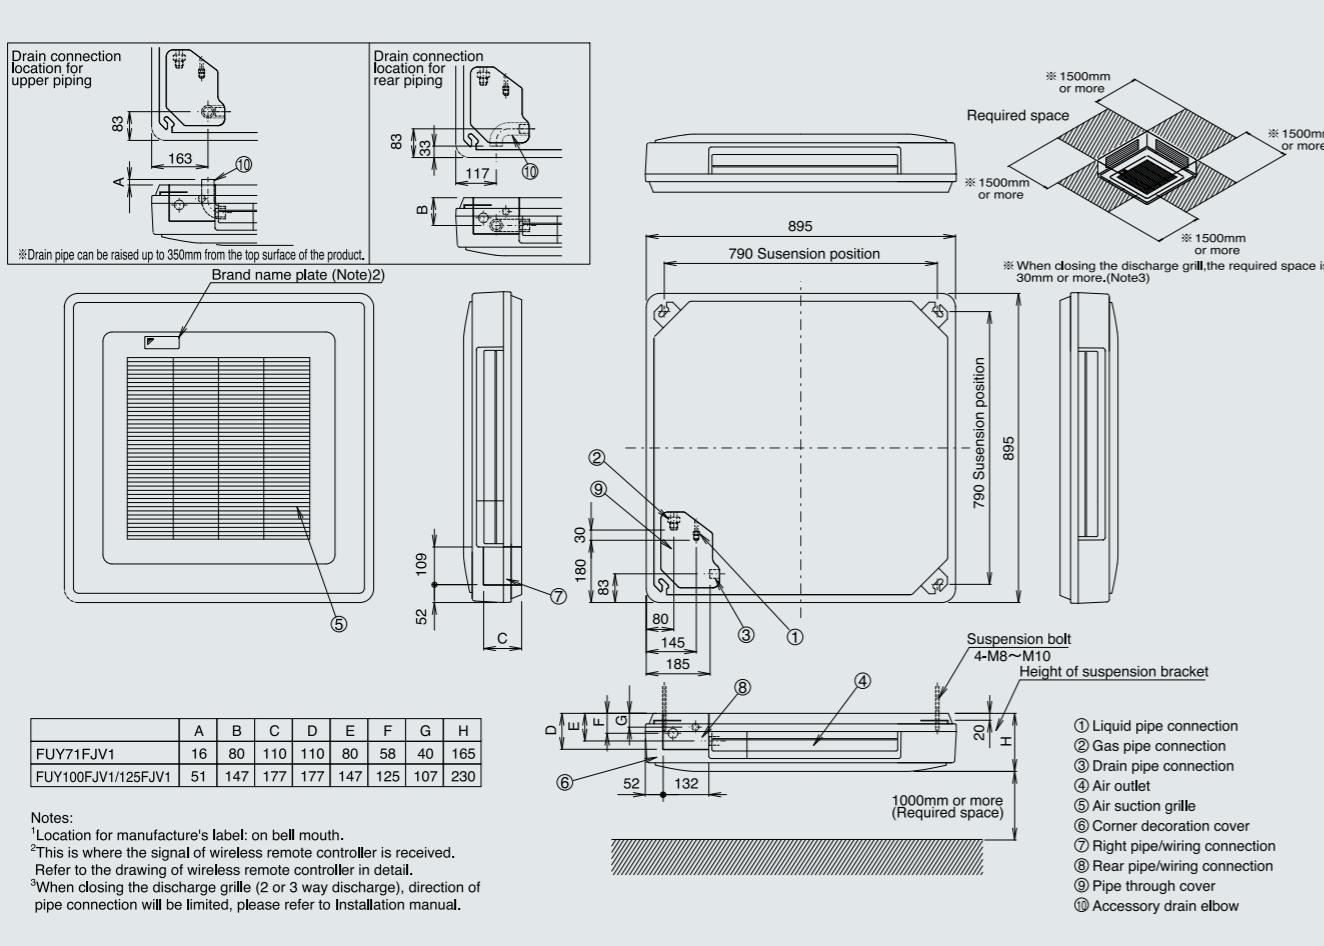


CEILING MOUNTED BUILT-IN TYPE

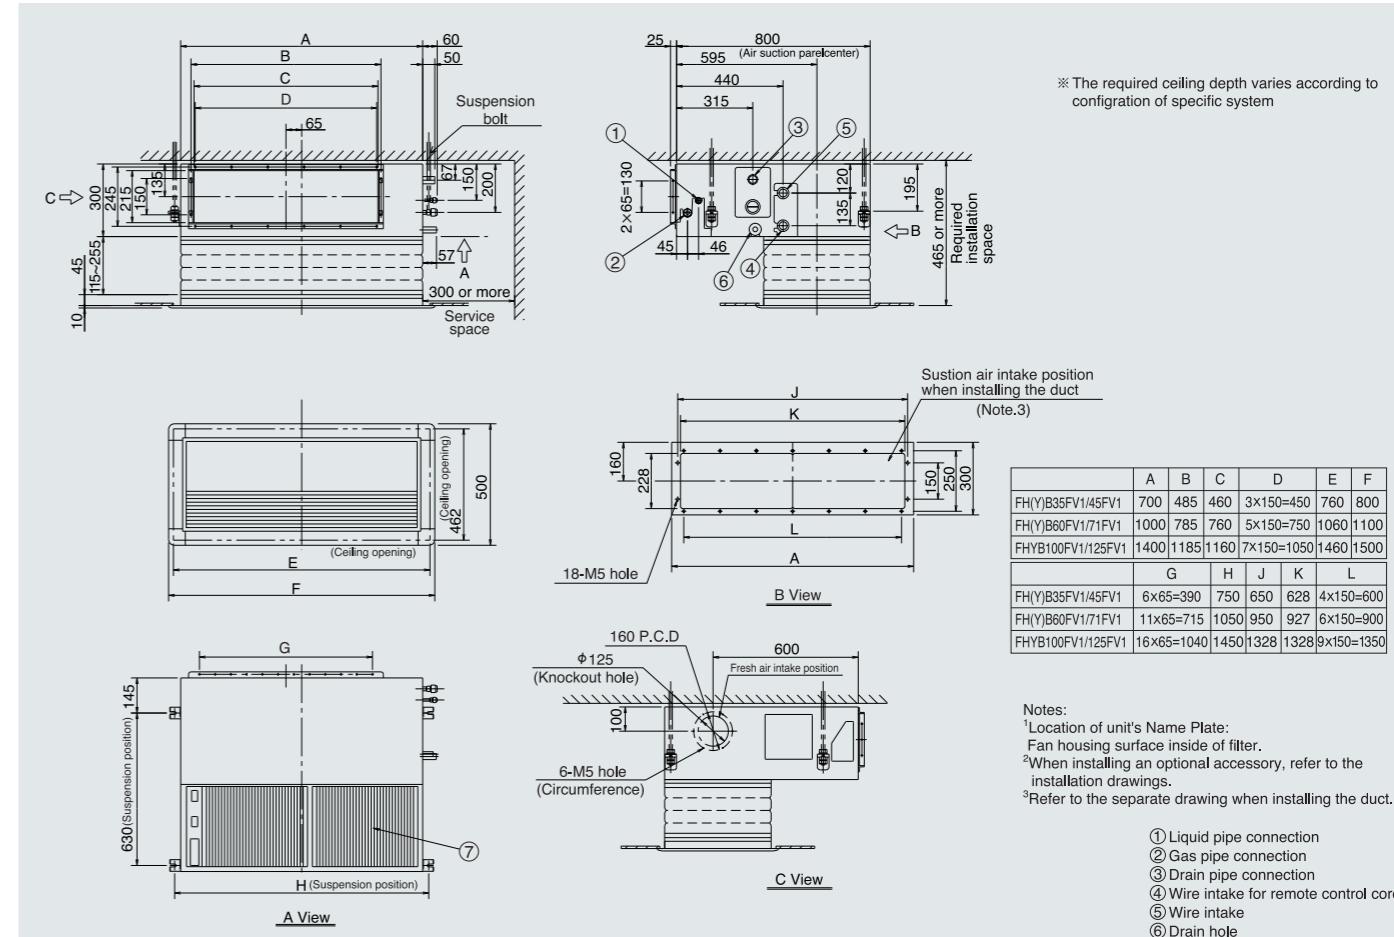

CEILING MOUNTED CASSETTE CORNER TYPE

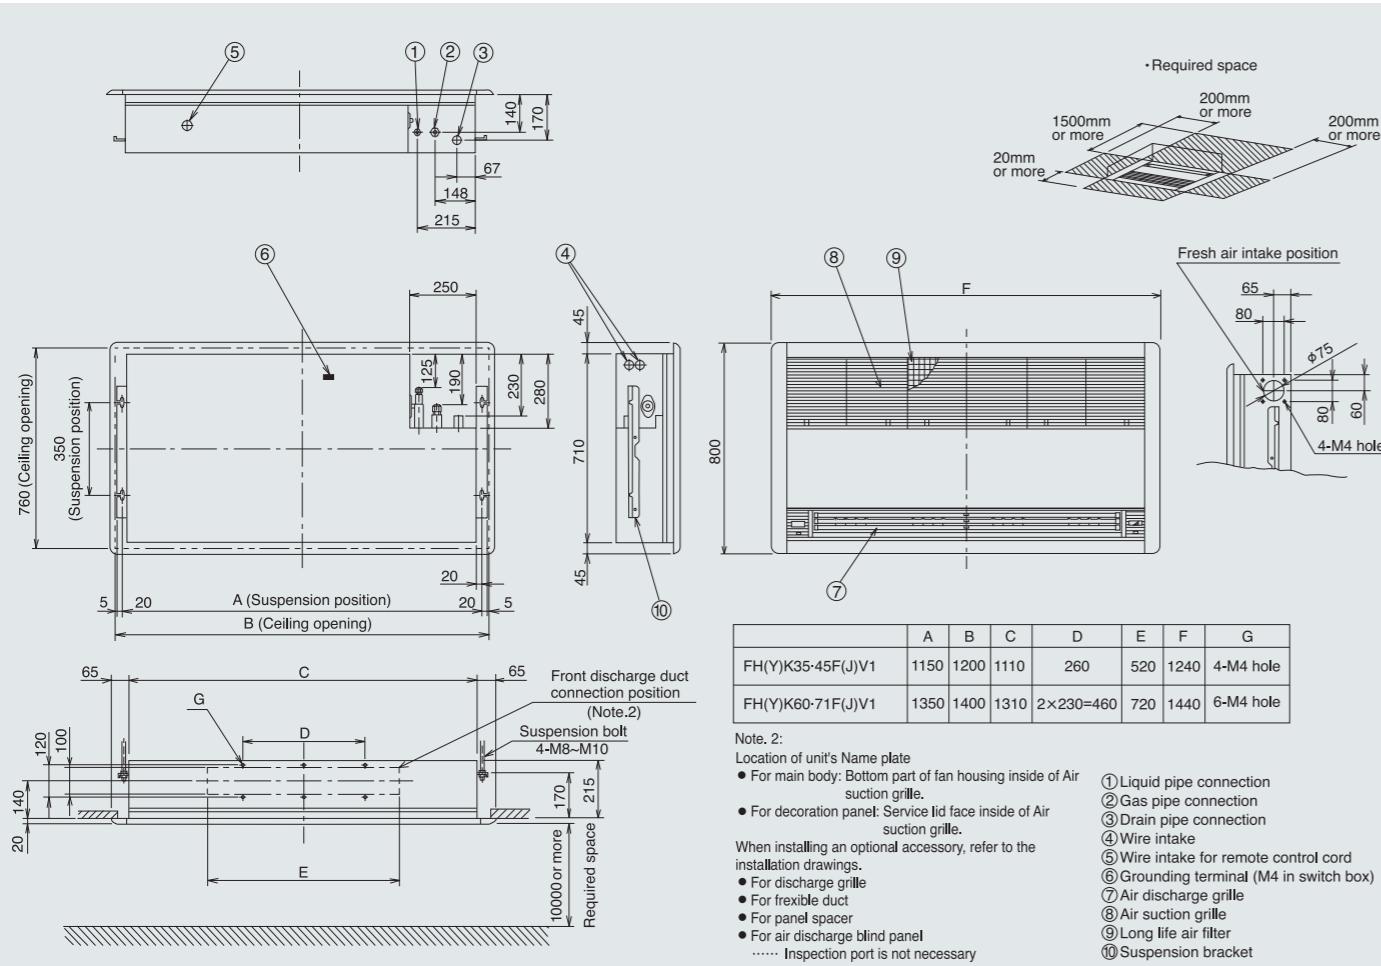


WALL MOUNTED TYPE

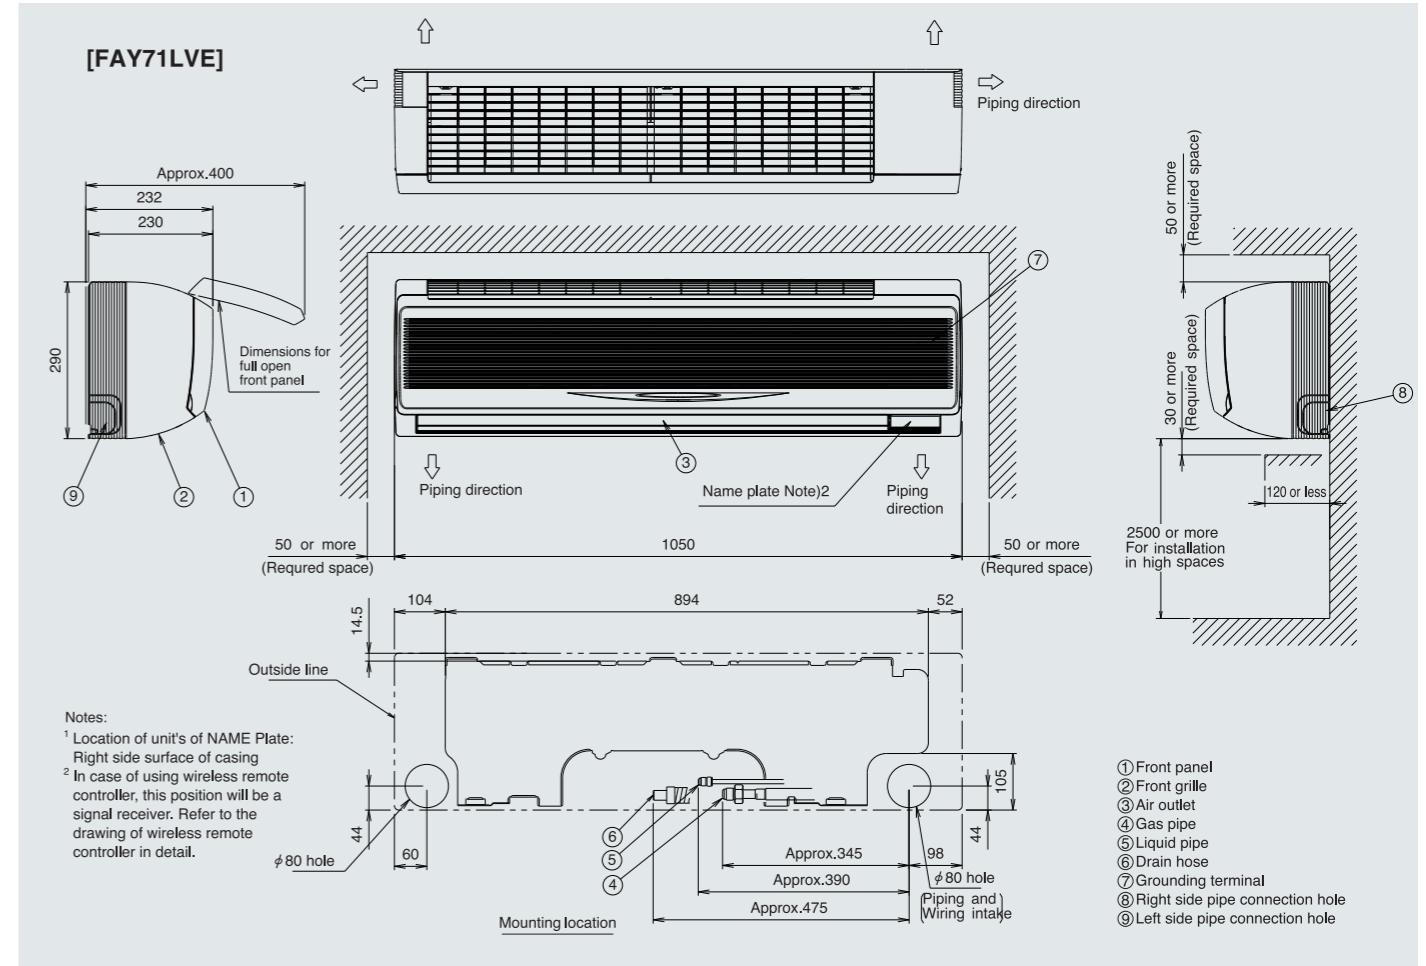


DIMENSIONS (Unit: mm)


WALL MOUNTED TYPE

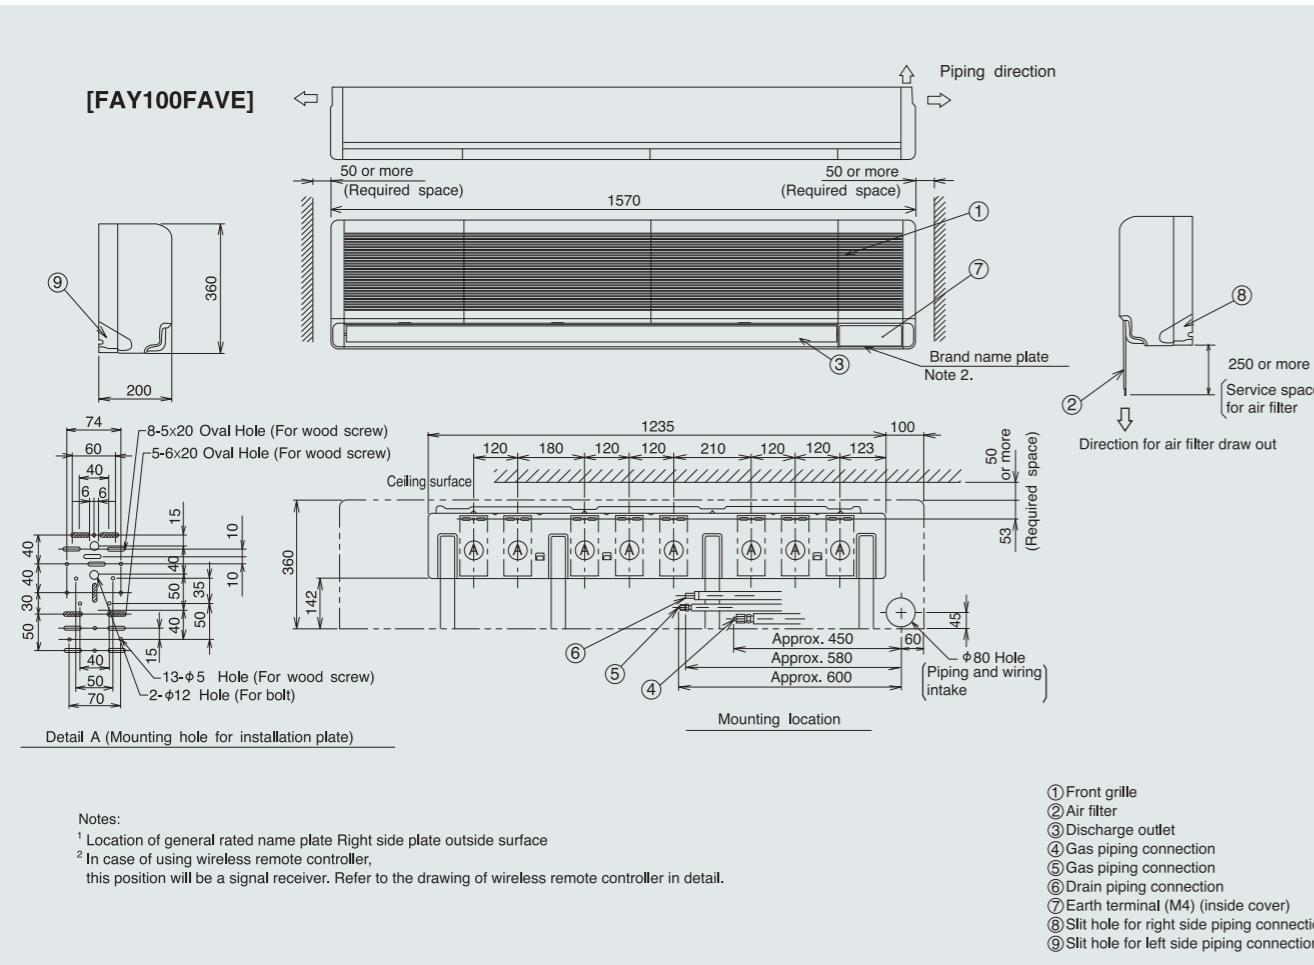


DUCT CONNECTION LOW STATIC PRESSURE TYPE

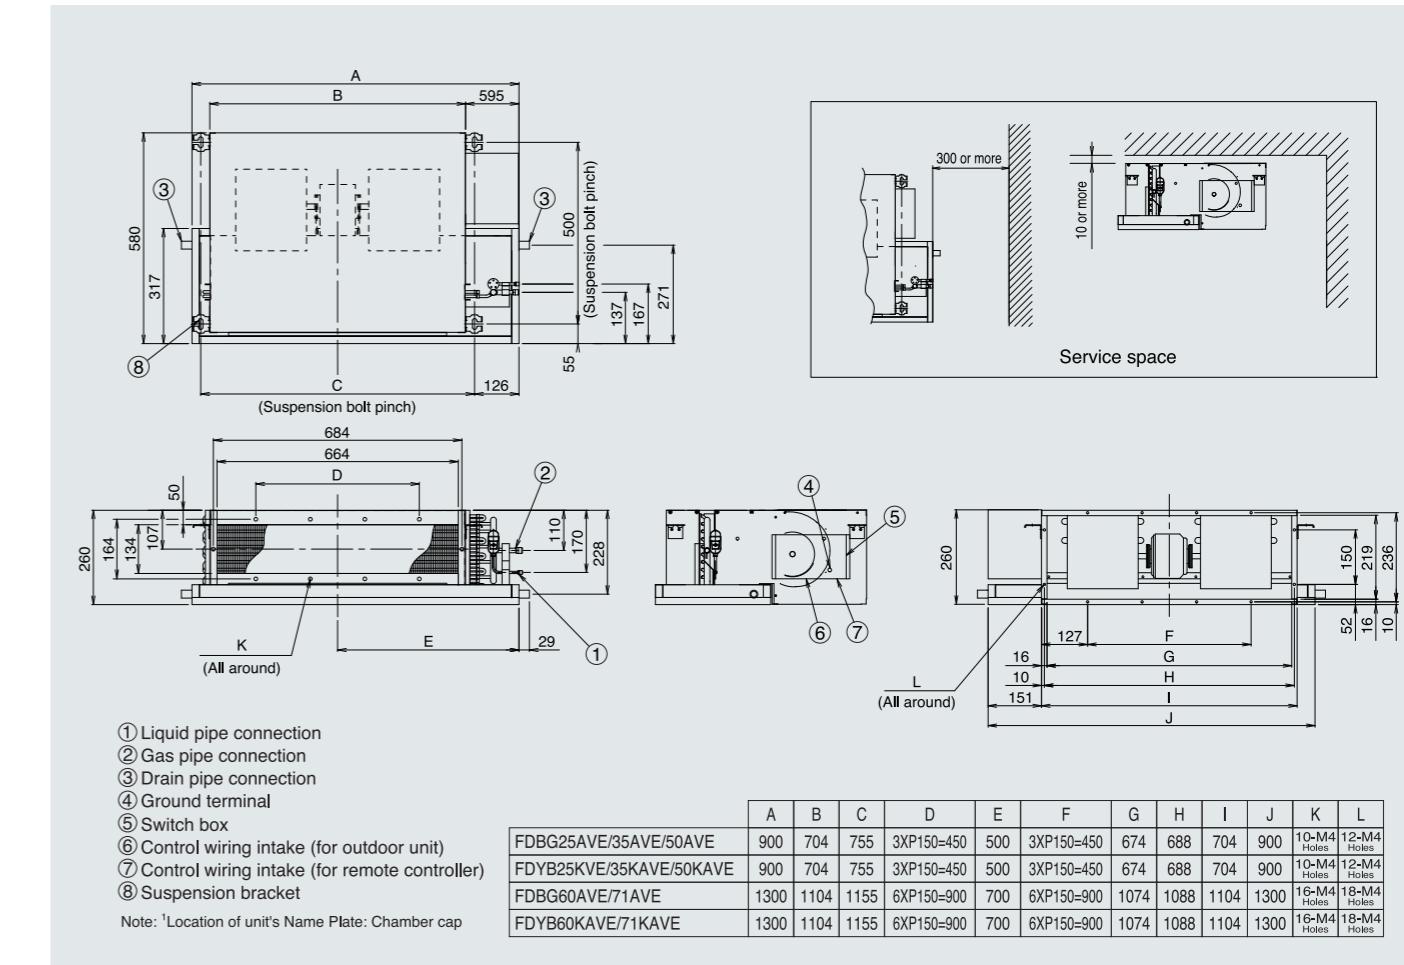

FLOOR STANDING TYPE

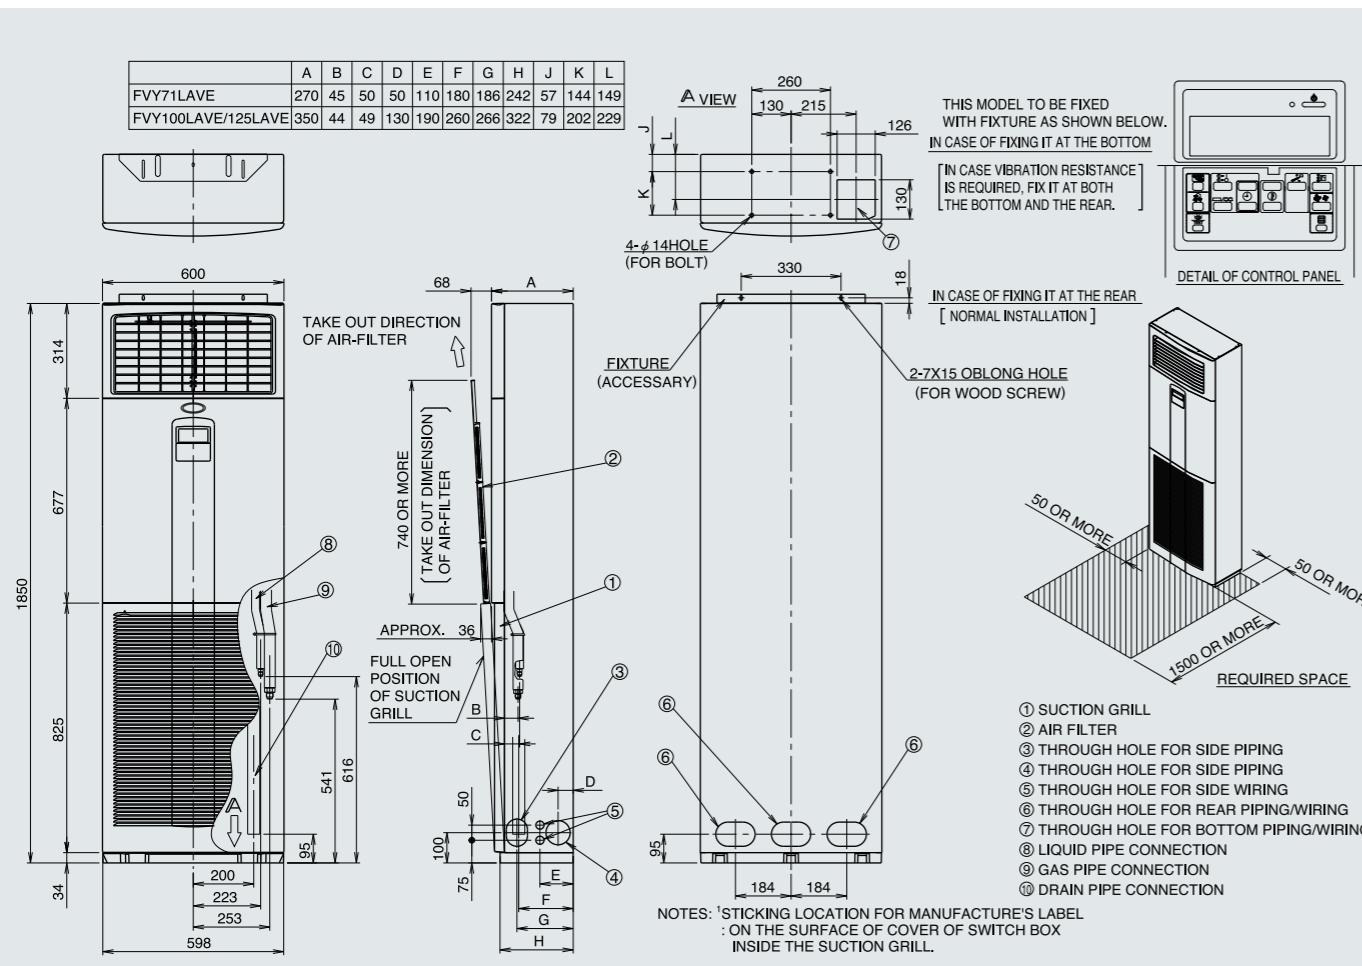


DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE

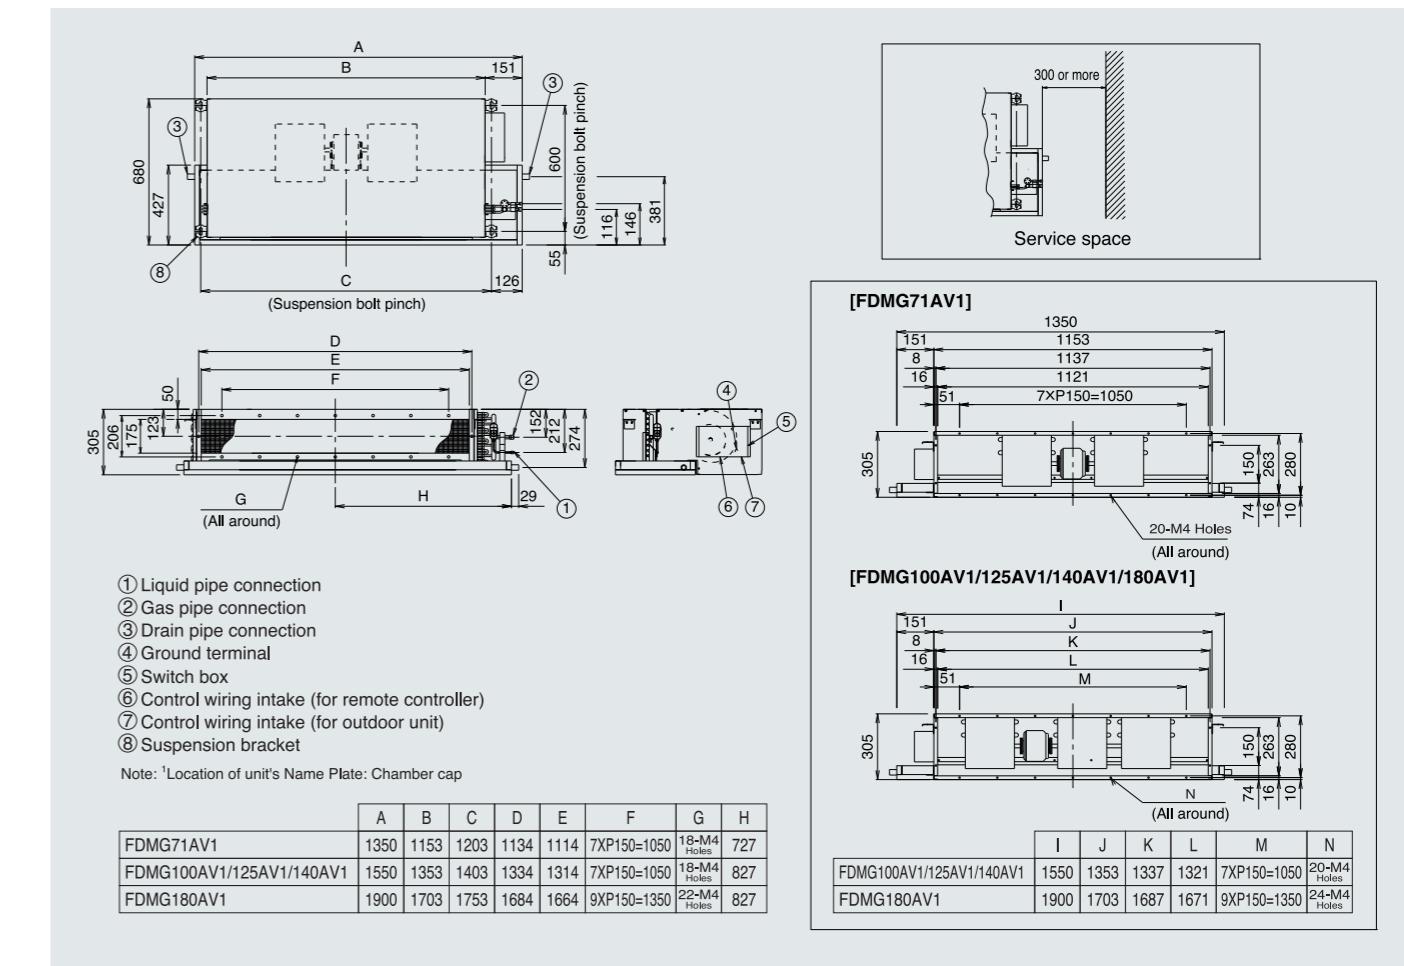


DIMENSIONS (Unit: mm)


DUCT CONNECTION MIDDLE STATIC PRESSURE TYPE

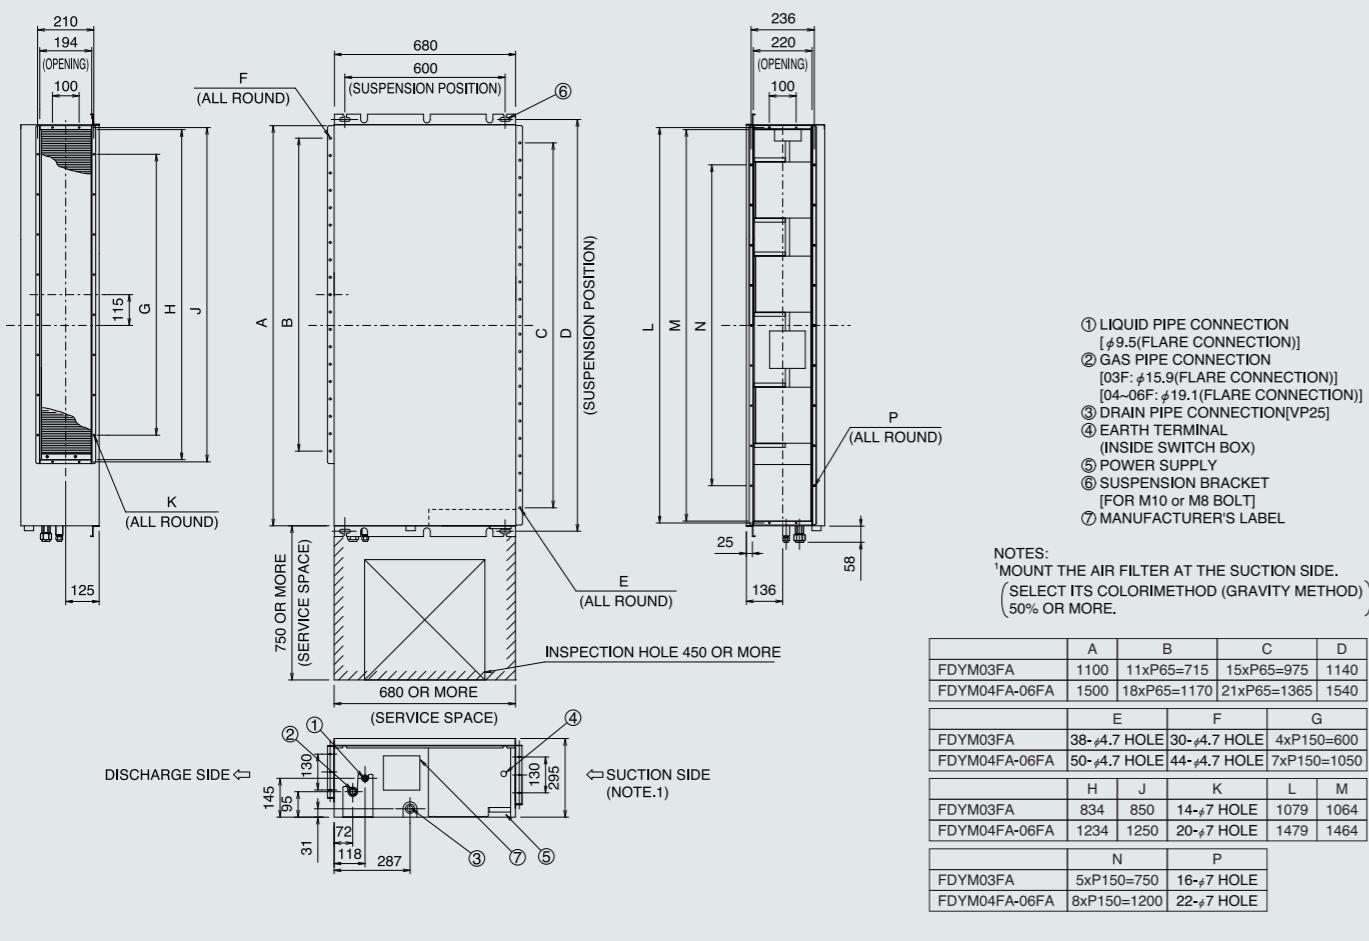


DUCT CONNECTION HIGH STATIC PRESSURE TYPE

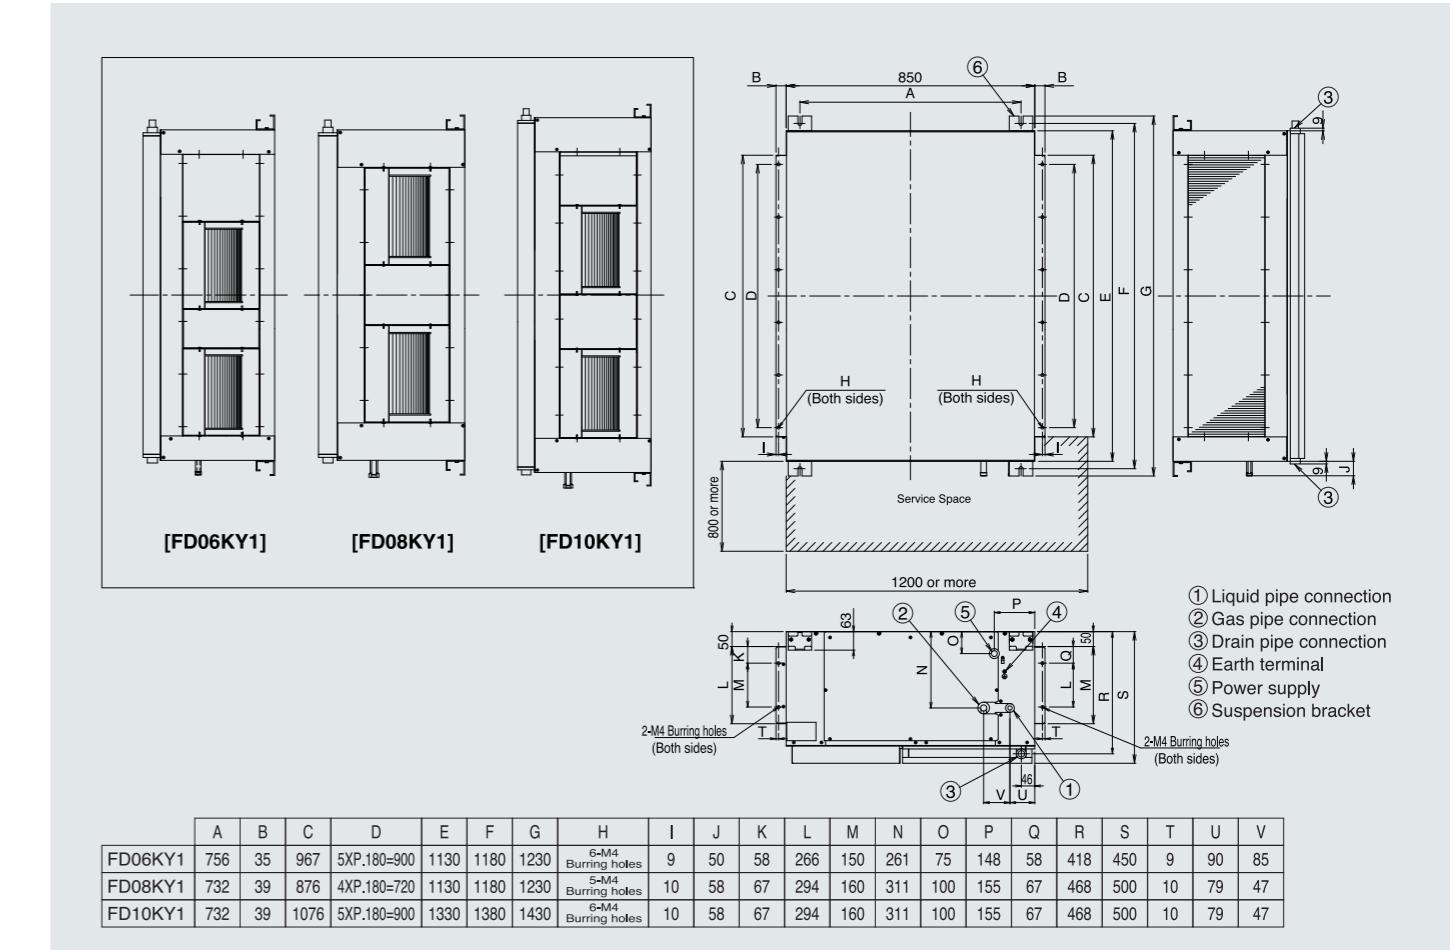

DUCT CONNECTION HIGH STATIC PRESSURE TYPE

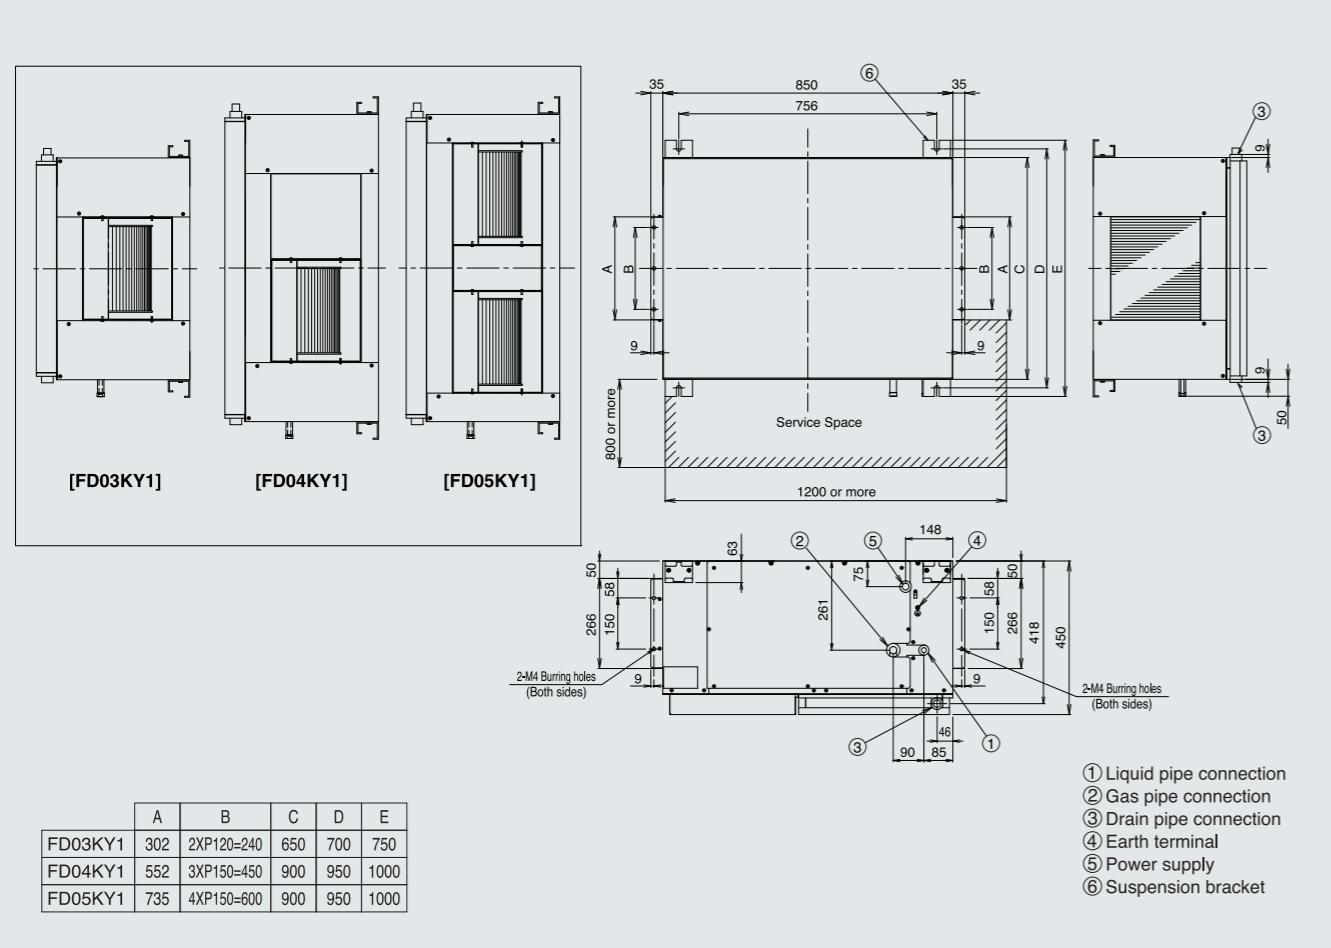


DUCT CONNECTION HIGH STATIC PRESSURE TYPE

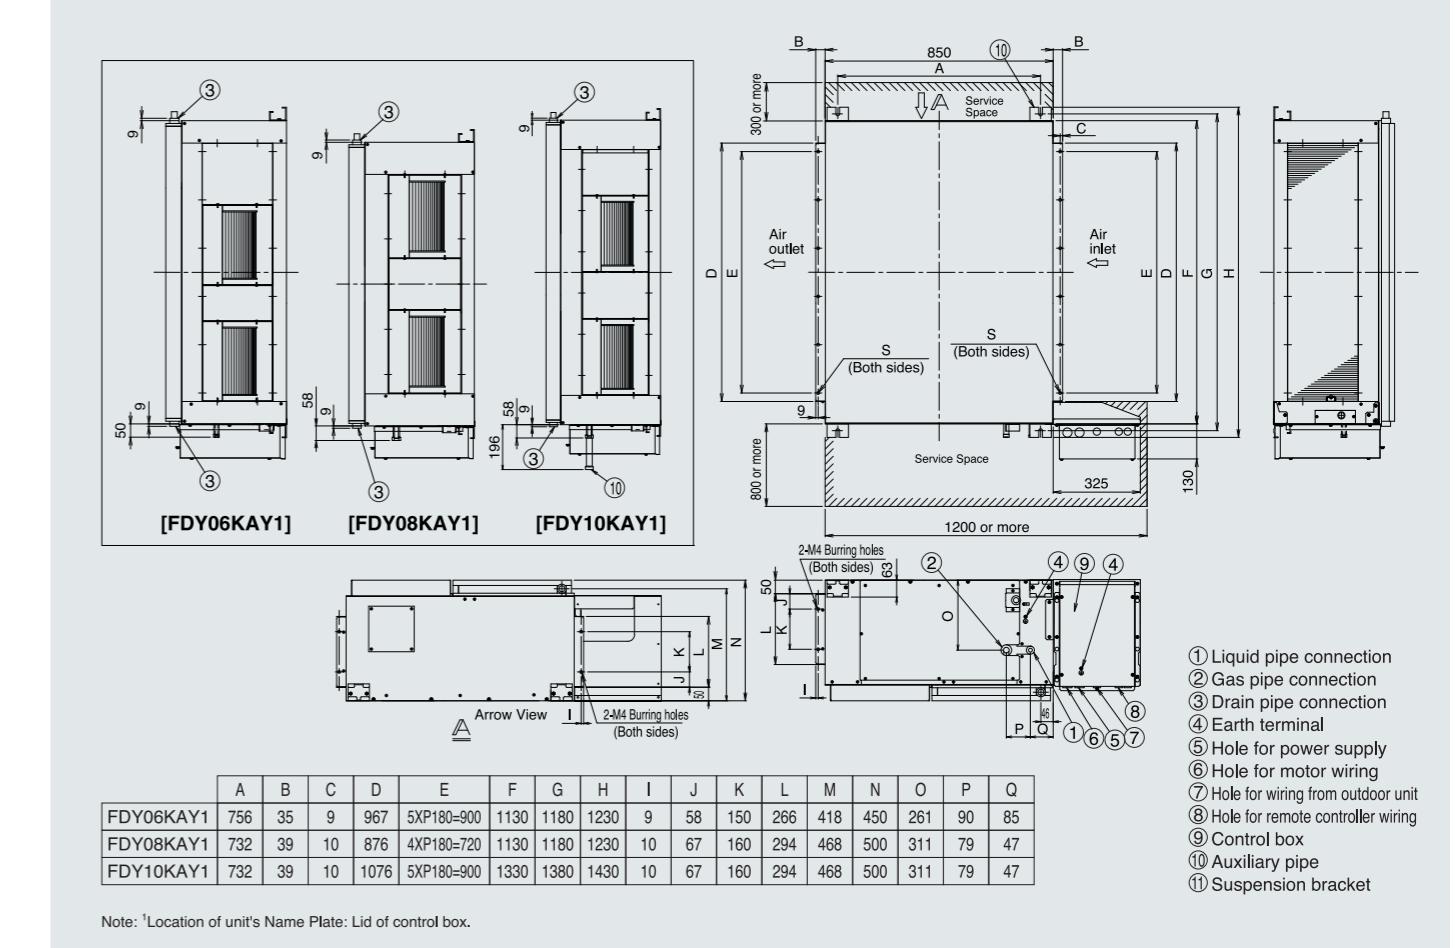


DIMENSIONS (Unit: mm)


DUCT CONNECTION HIGH STATIC PRESSURE TYPE

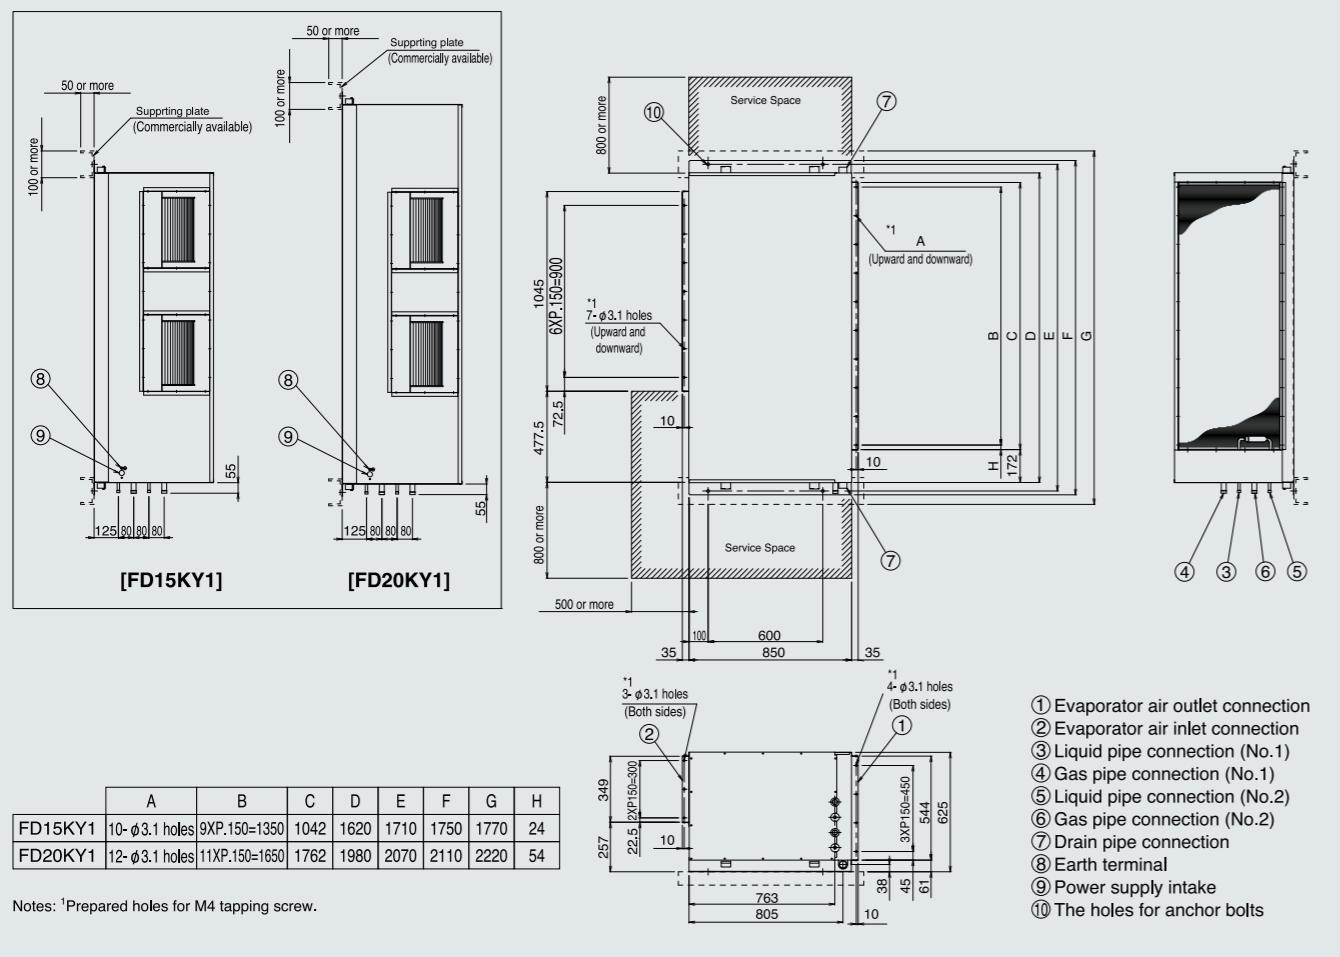


OUTDOOR UNIT // R25JV1, R35JV1

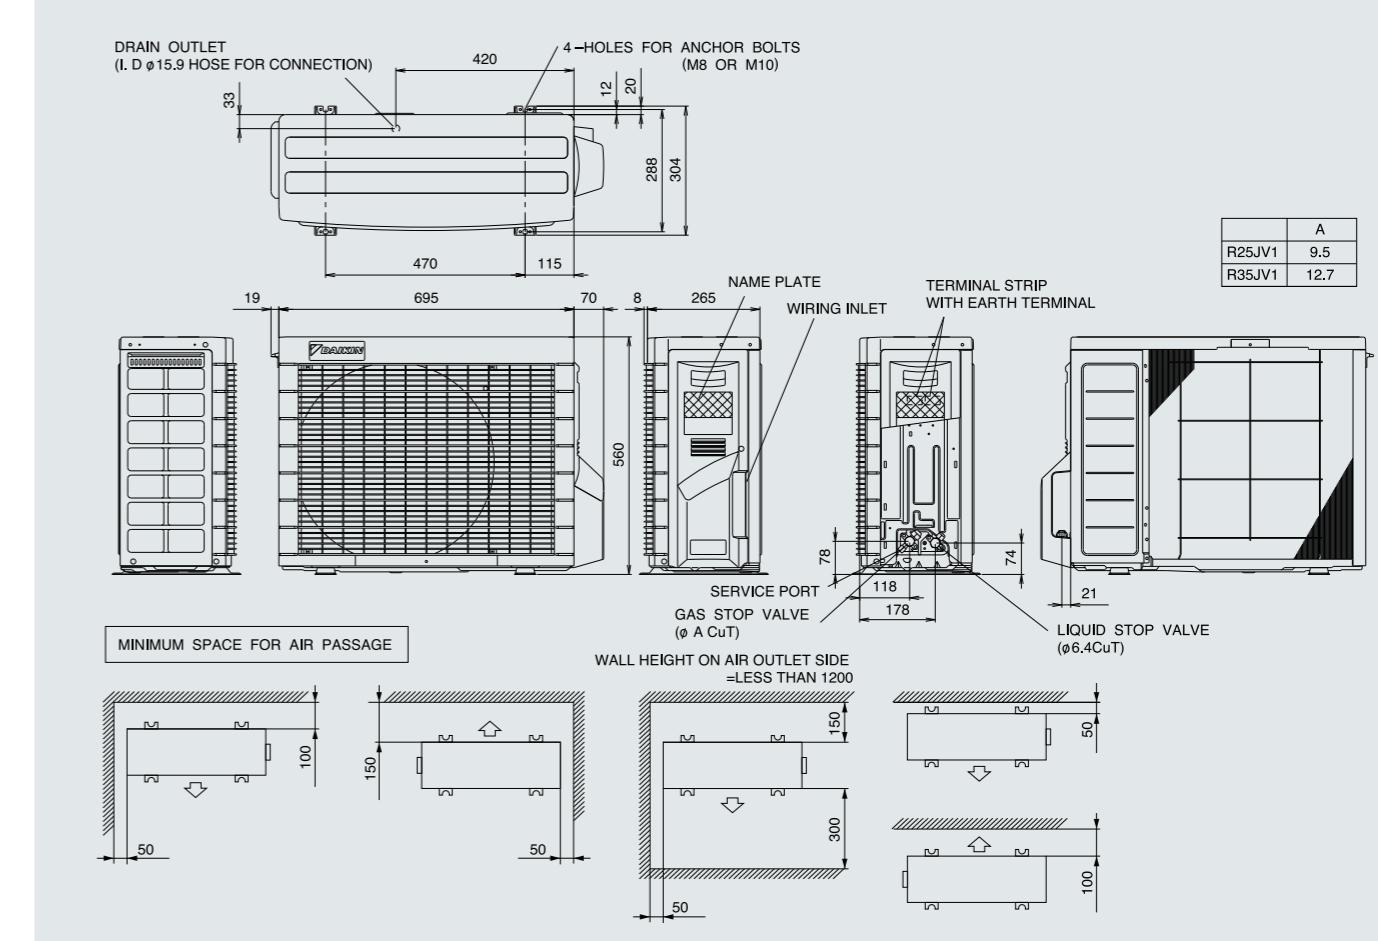

DUCT CONNECTION HIGH STATIC PRESSURE TYPE

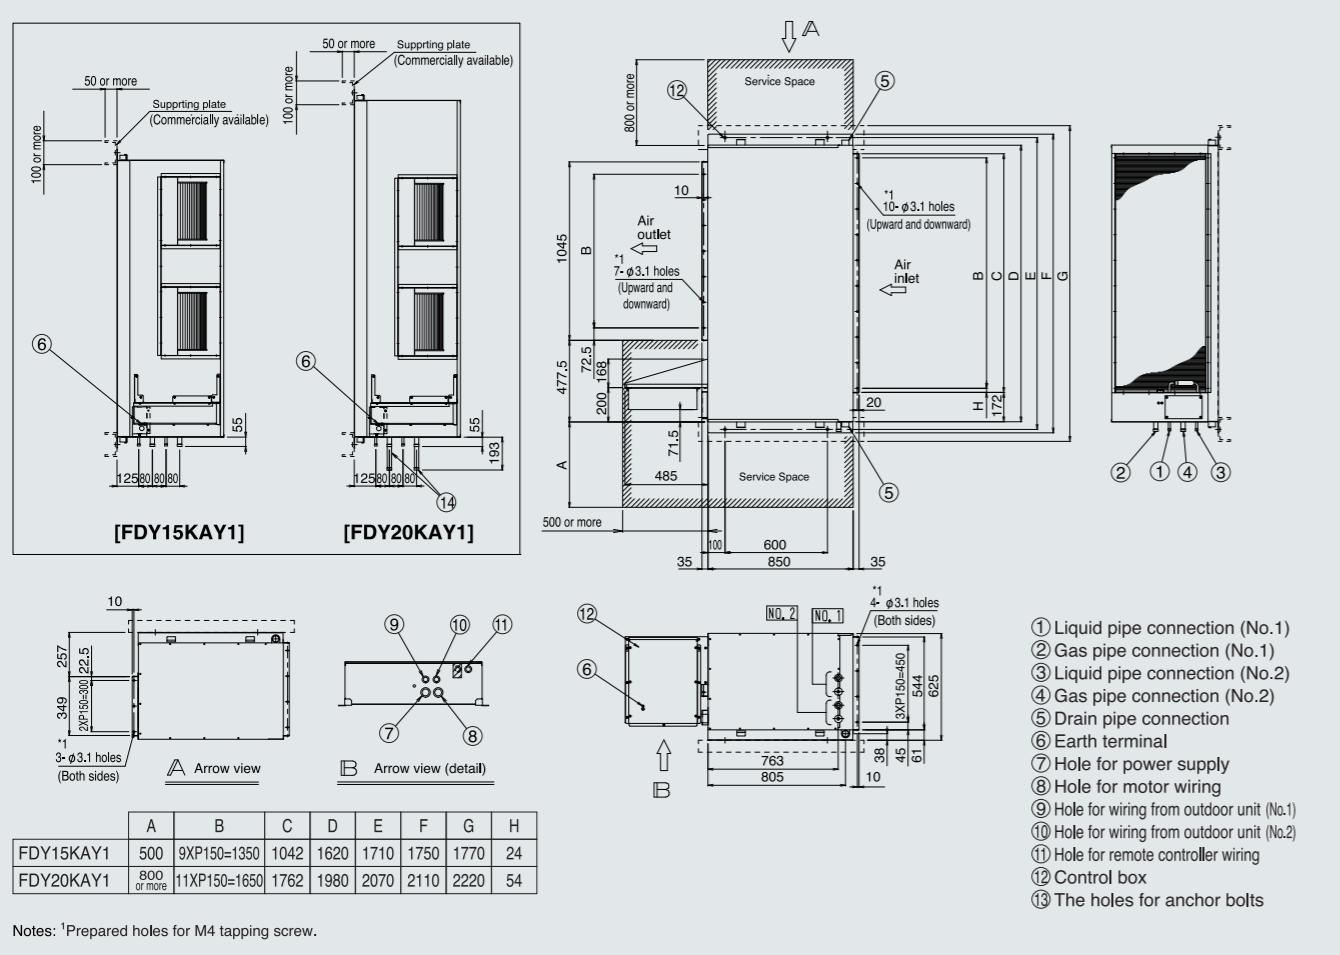


OUTDOOR UNIT // R35GV1, RY35FV1A, R50GV1

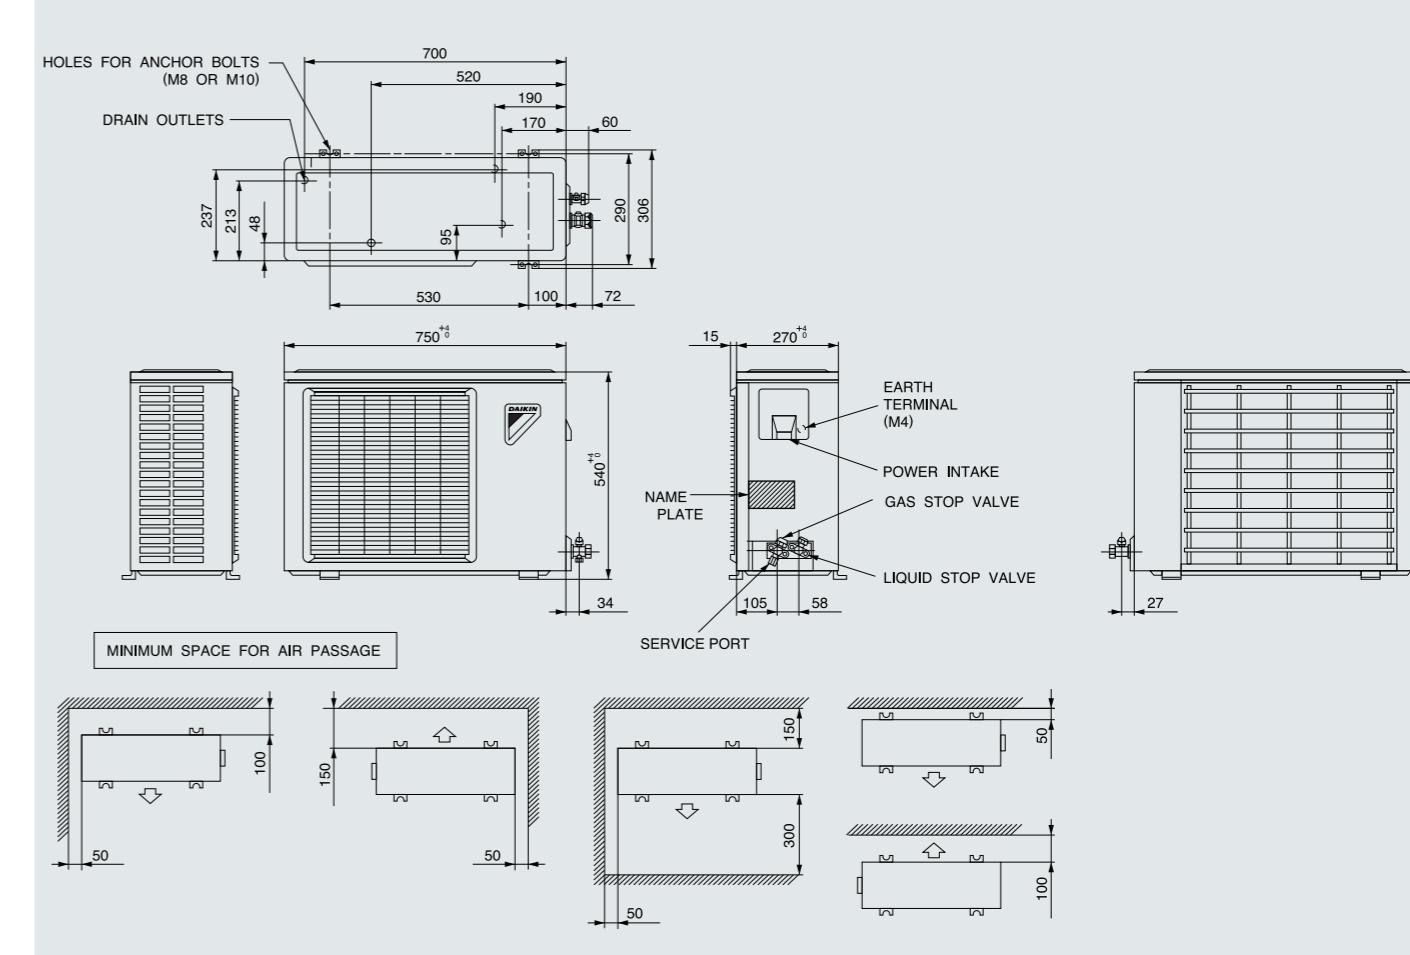


PIMENSIONS (Unit: mm)


OUTDOOR UNIT // RY50GAV1A, R60GV1

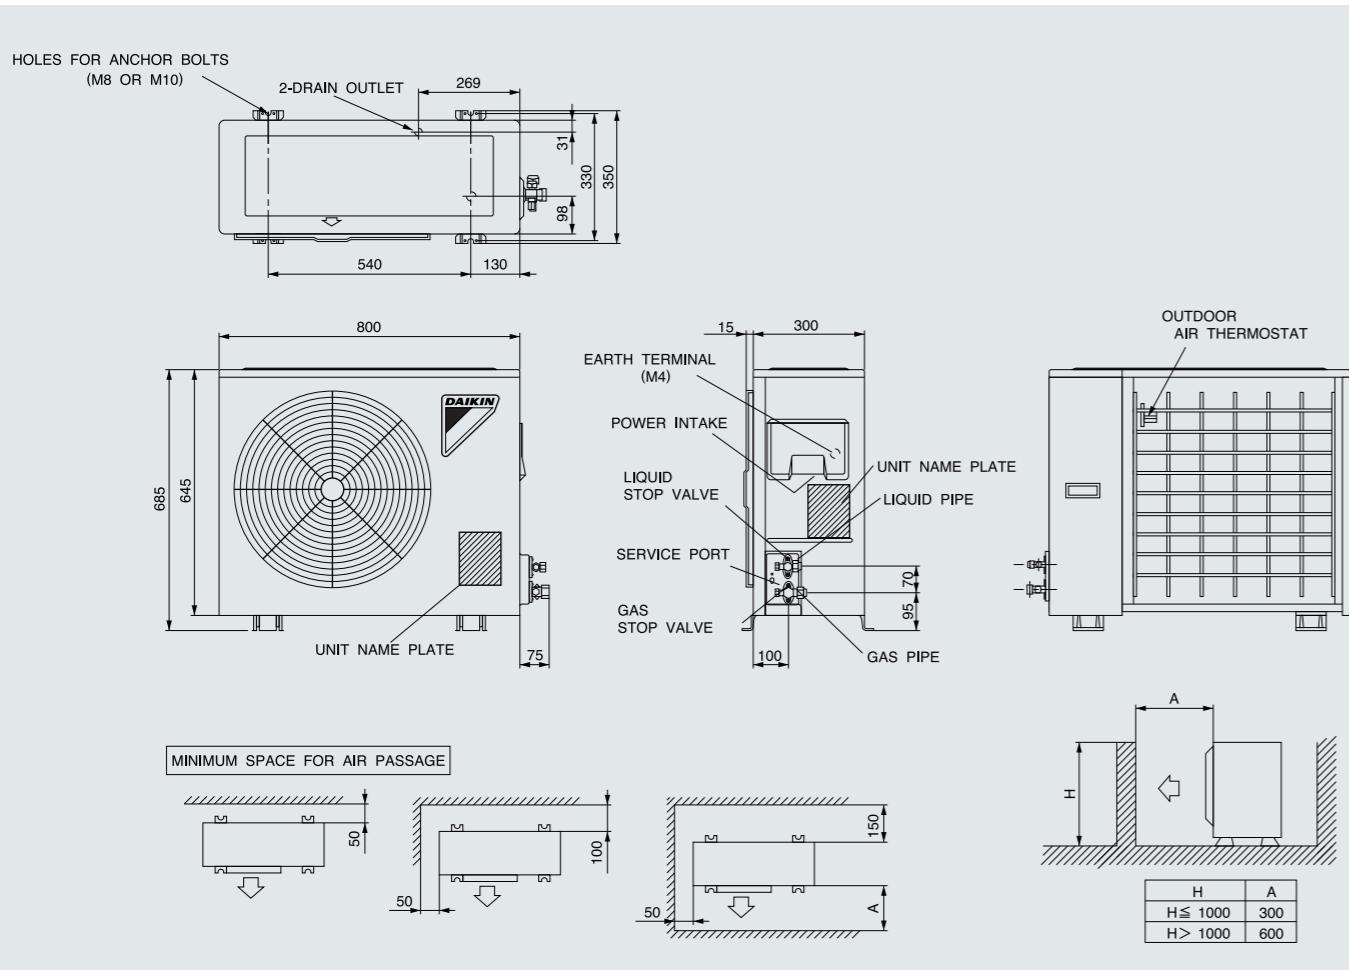


OUTDOOR UNIT // RY60GAV1A

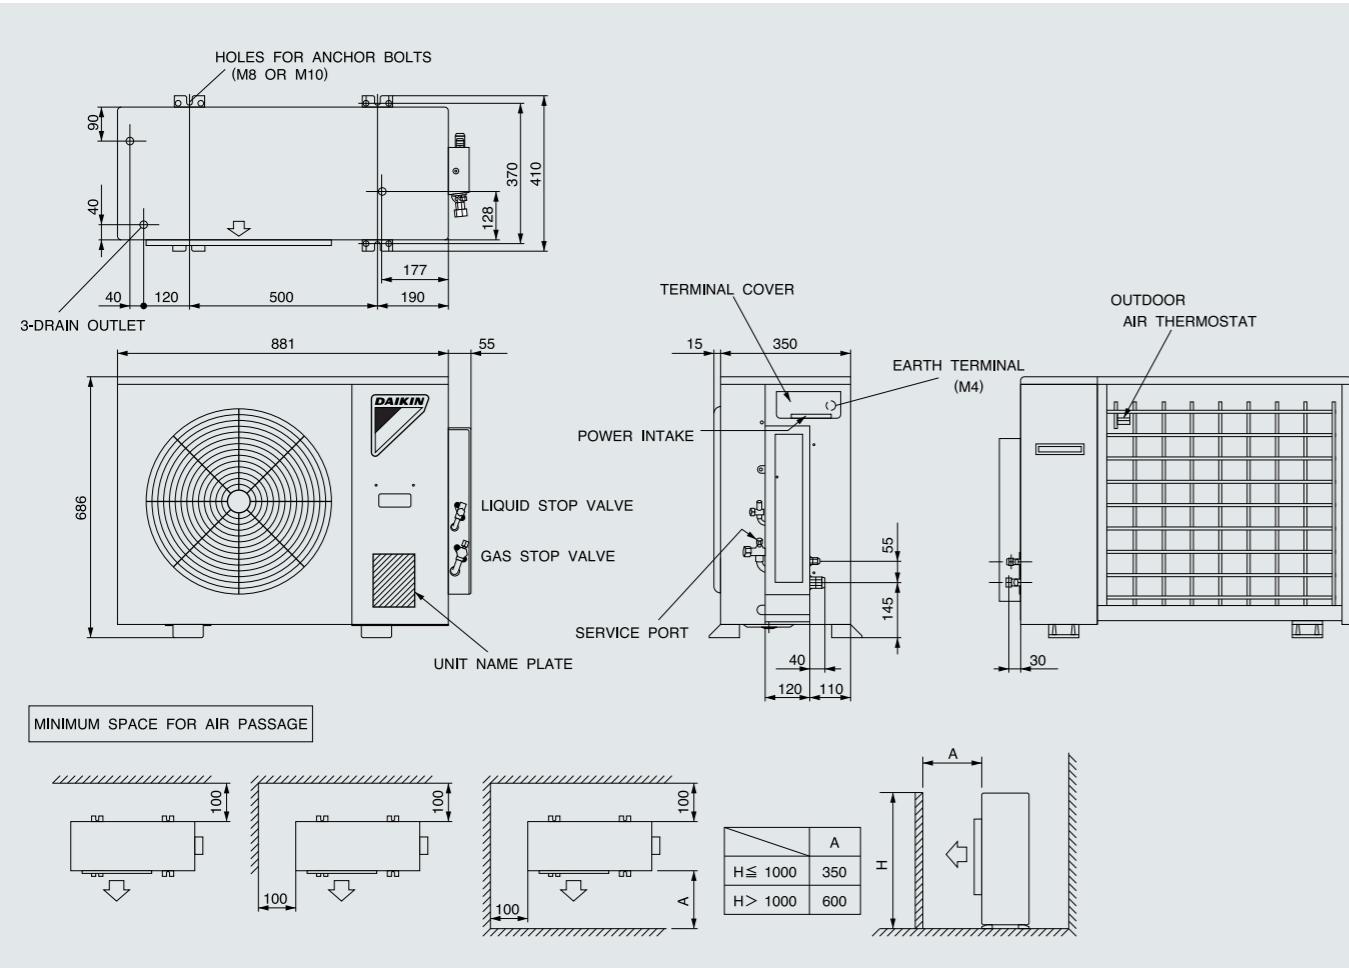

OUTDOOR UNIT // R71FUY1, RG71AV1/AY

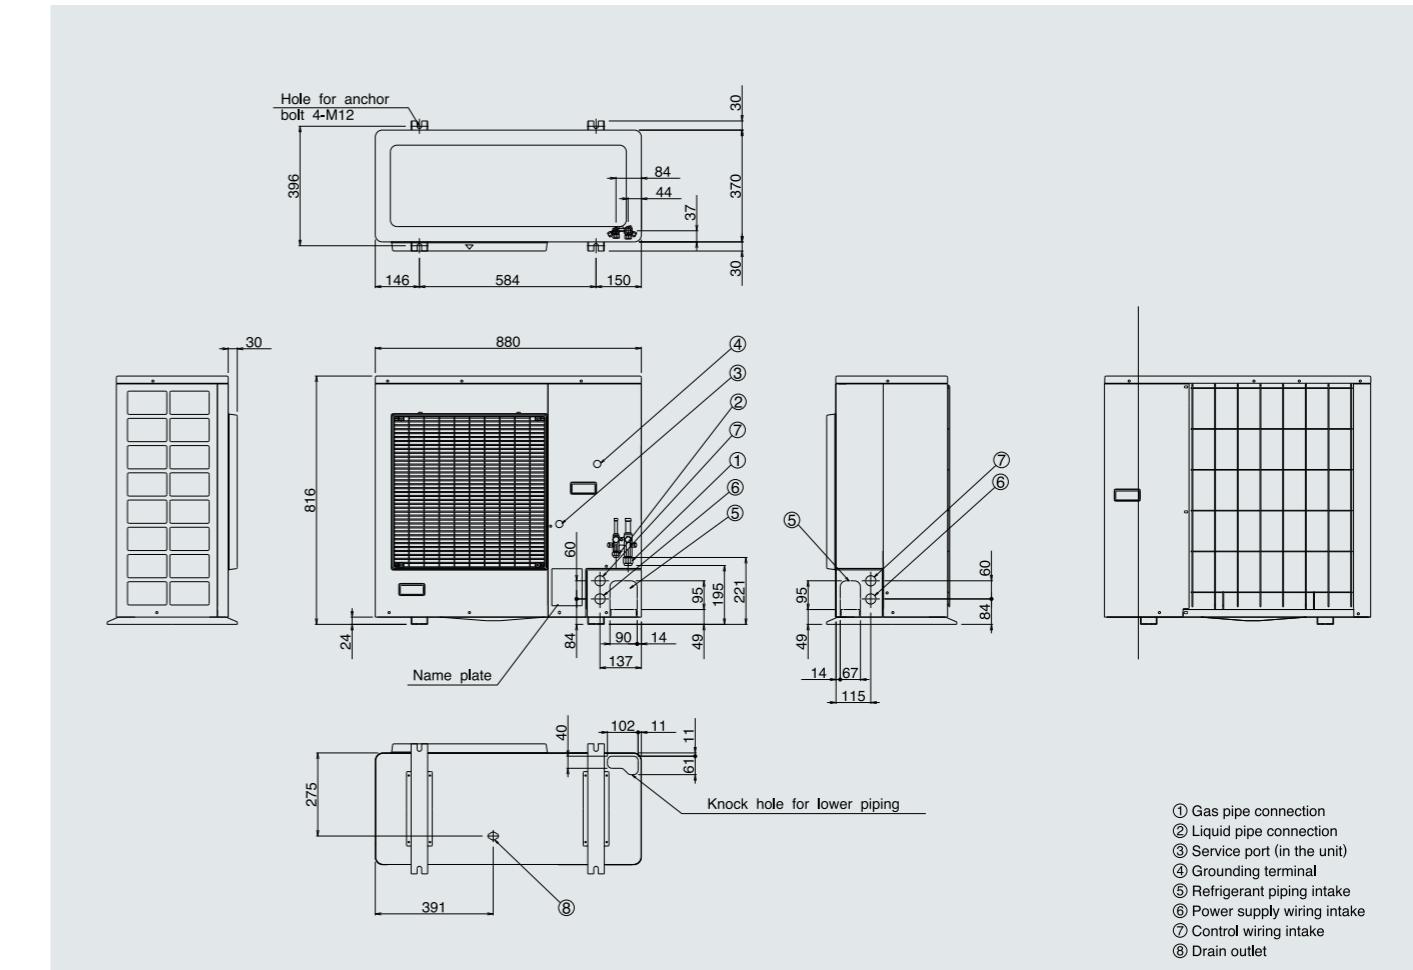


OUTDOOR UNIT // R(Y)71LUV1/Y

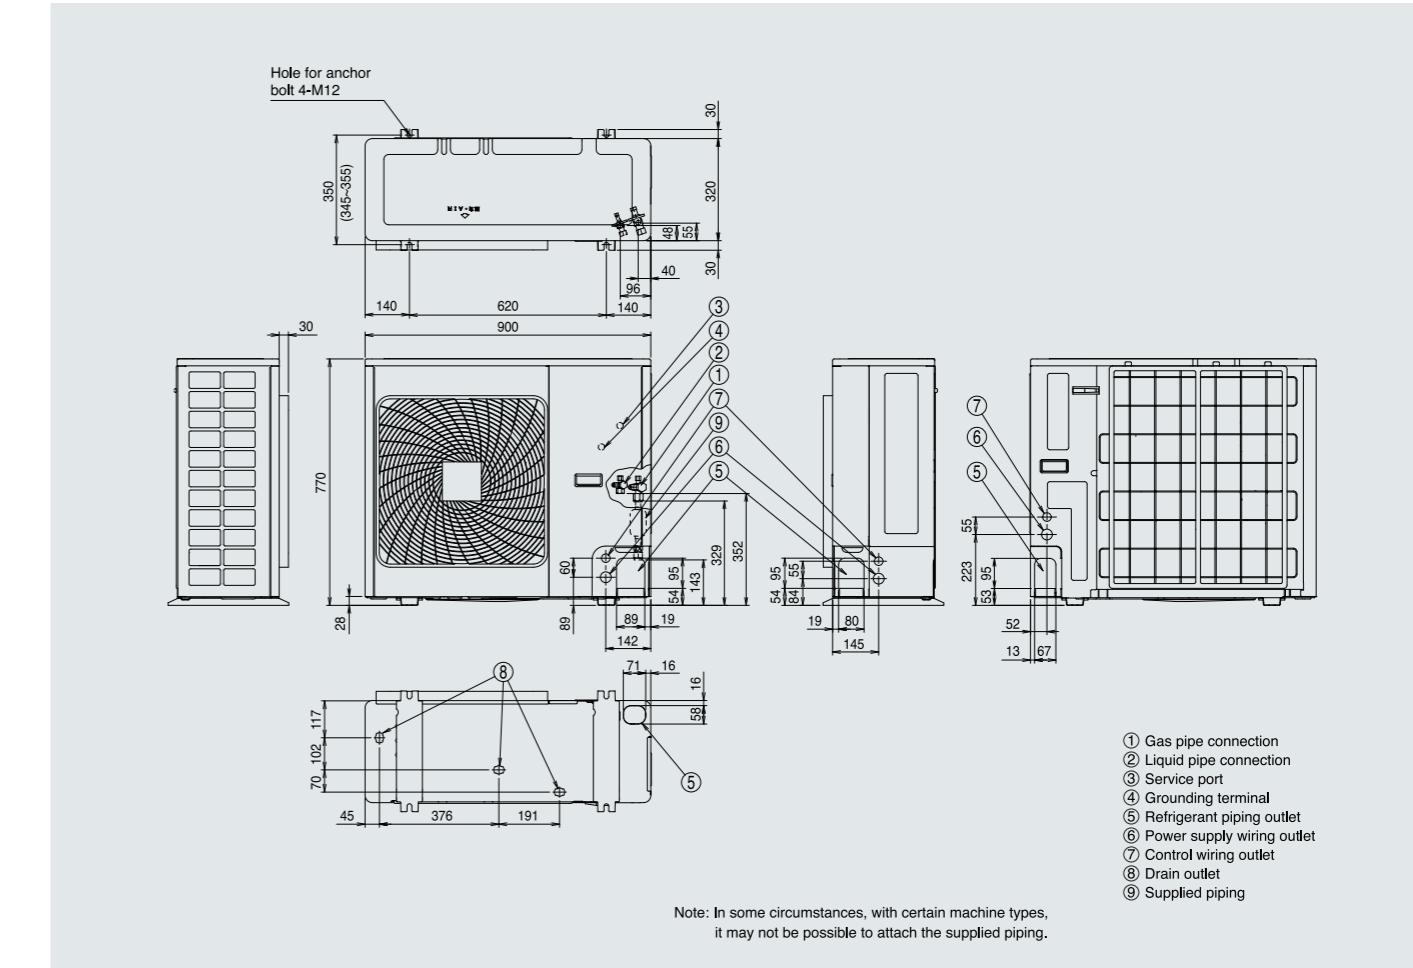


DIMENSIONS (Unit: mm)


OUTDOOR UNIT // R100FUV1/Y1, 125FUY1

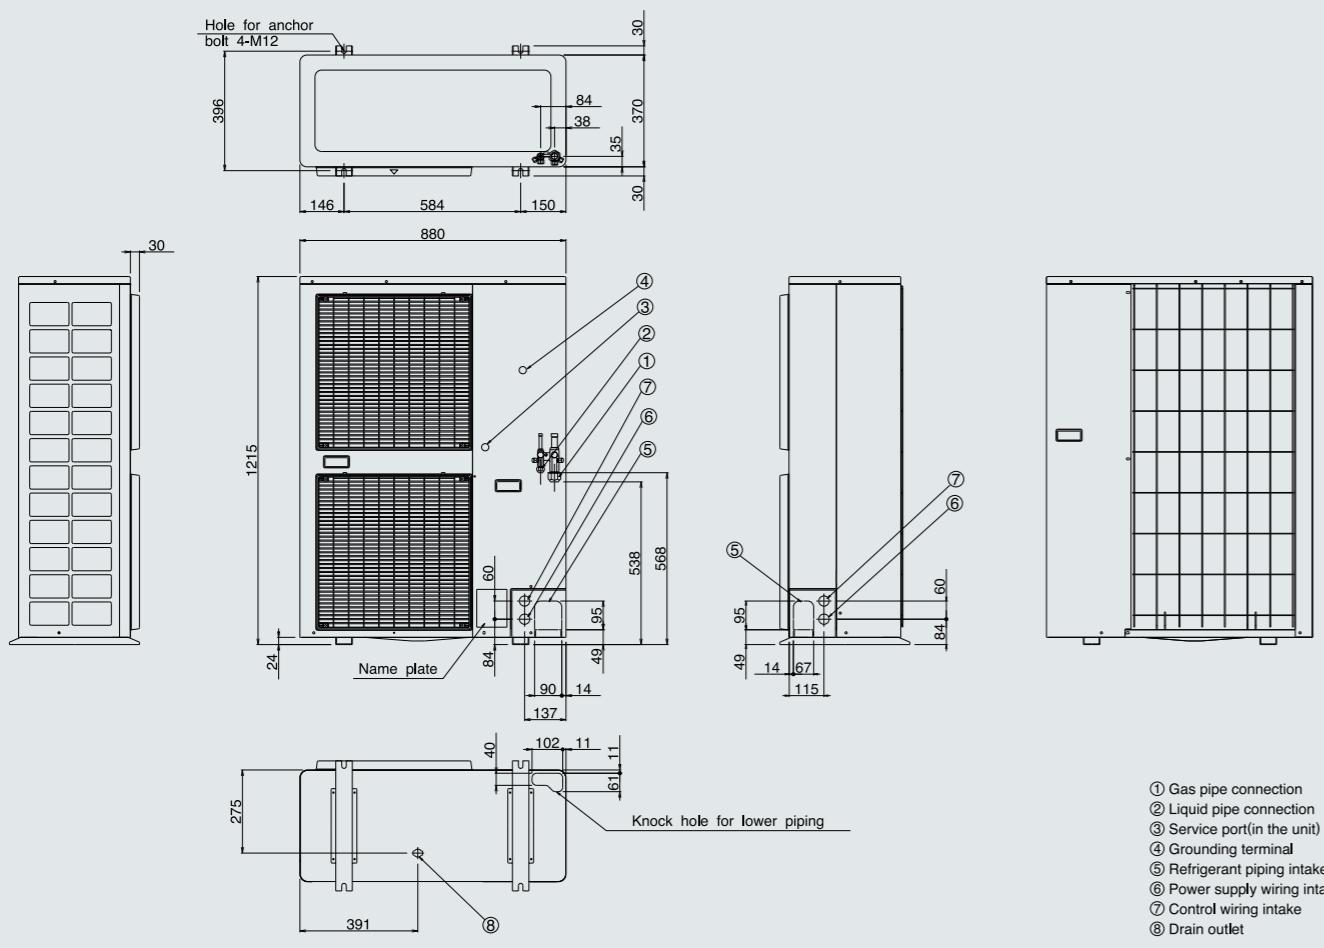


OUTDOOR UNIT // R(Y)125LUY1, 140LUY1

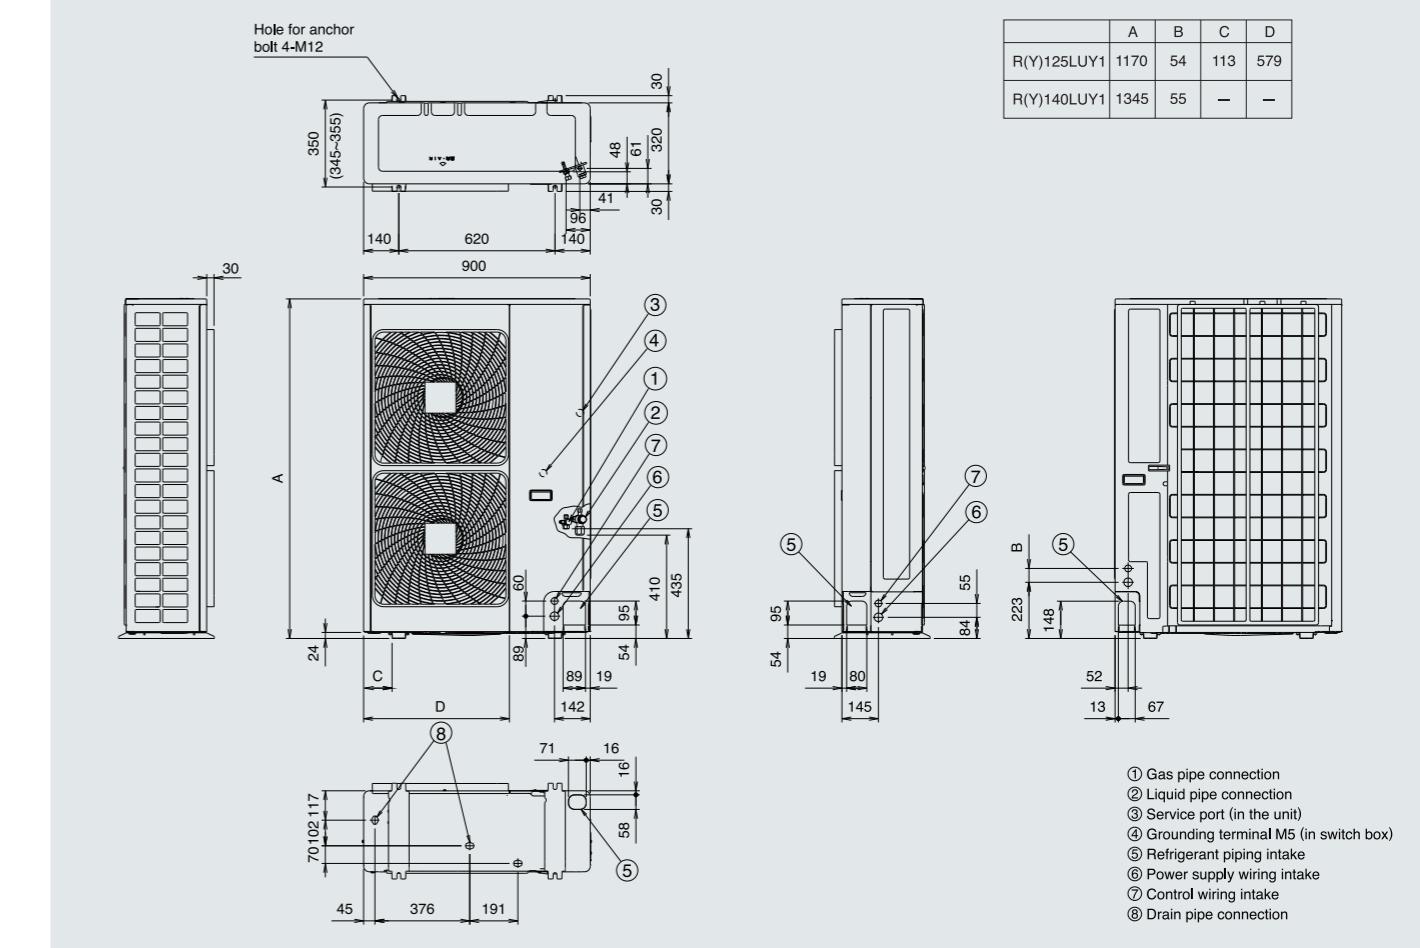

OUTDOOR UNIT // R(Y)100LUV1/Y1

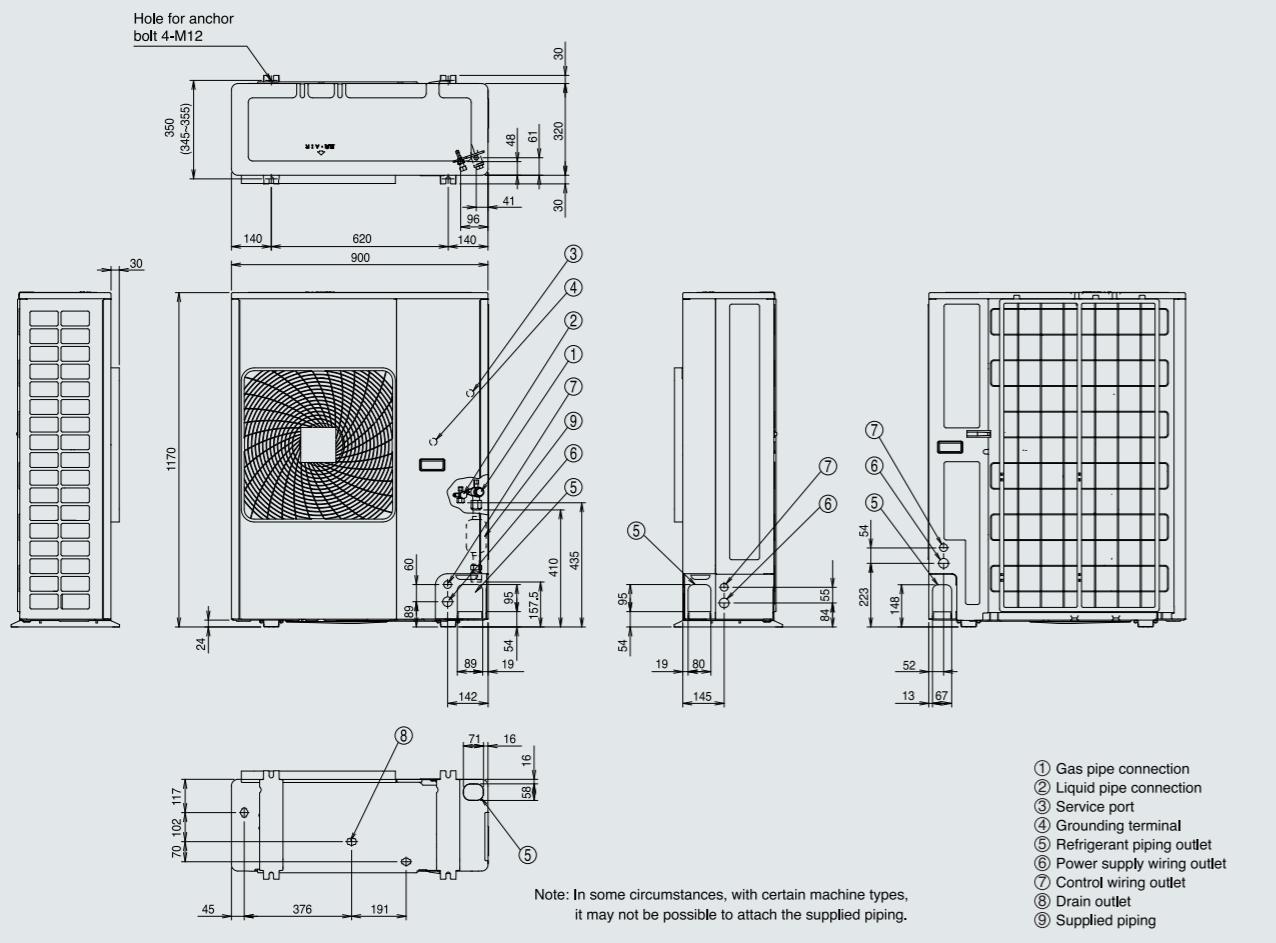


OUTDOOR UNIT // RU06KY1

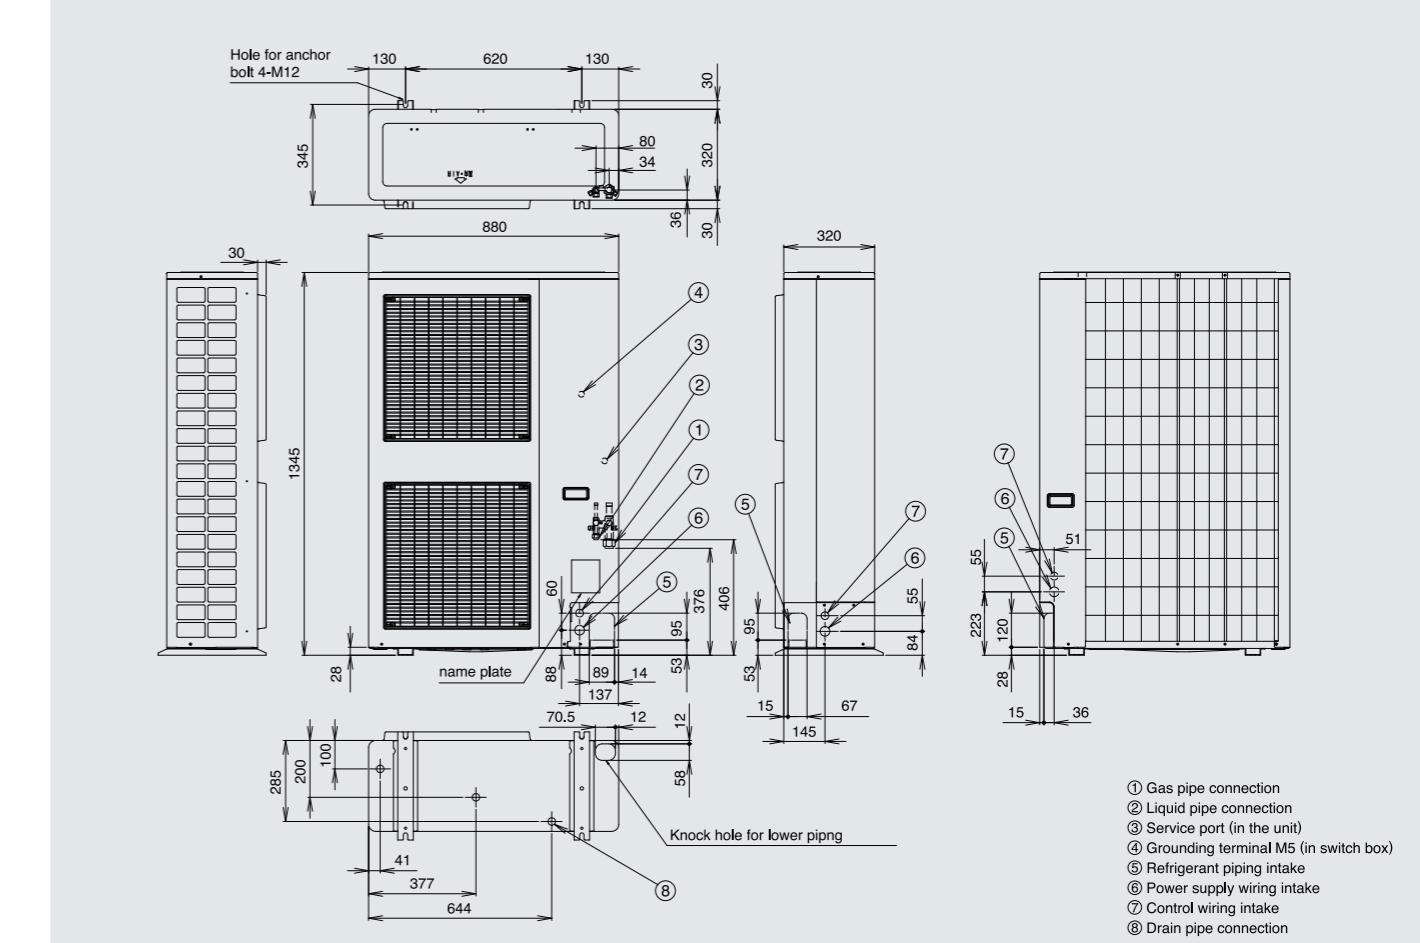


DIMENSIONS (Unit: mm)


OUTDOOR UNIT // RG140AY1/180AY1

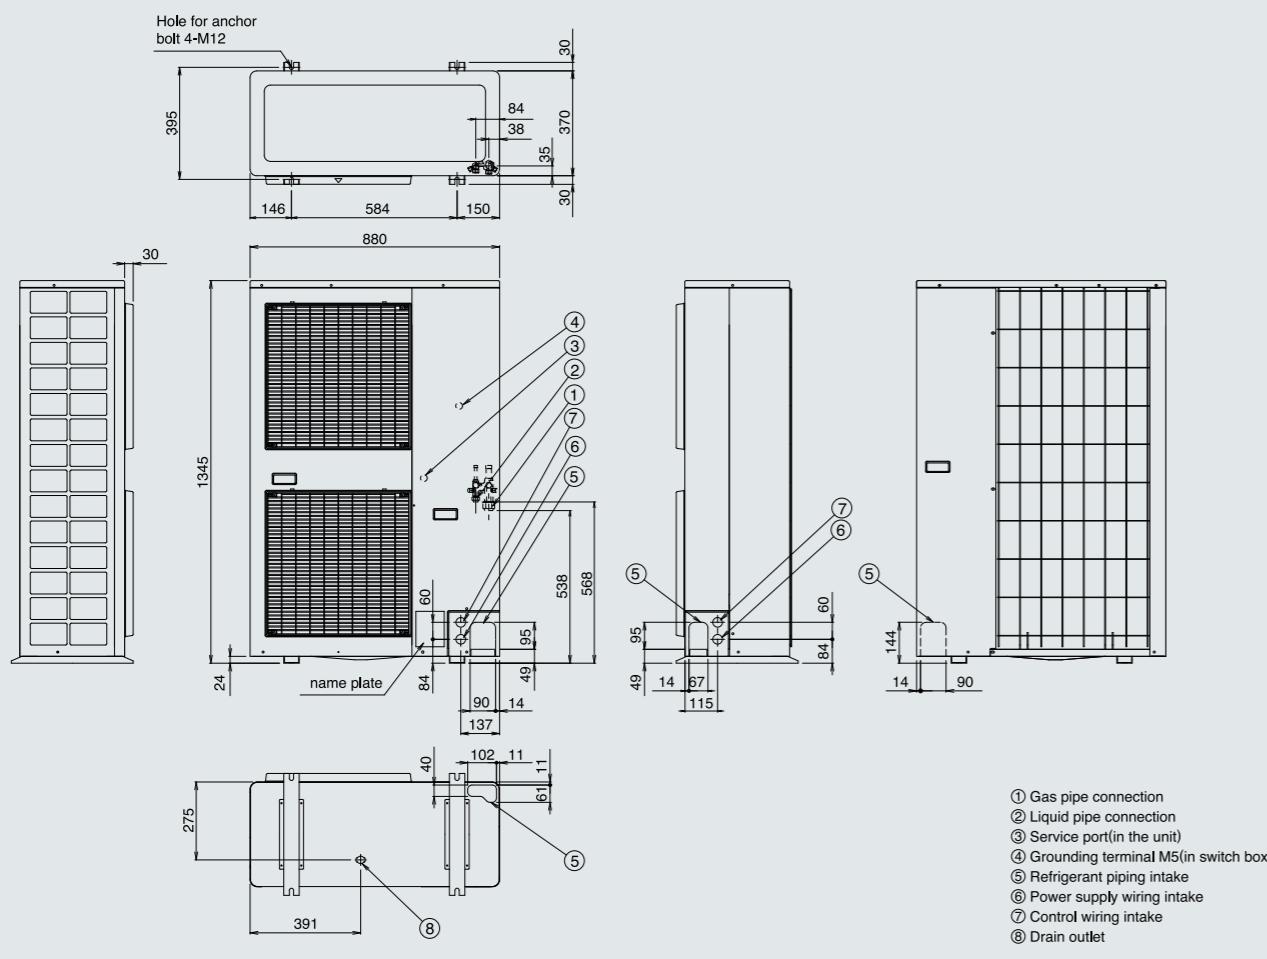


OUTDOOR UNIT // RU08KY1/10KY1

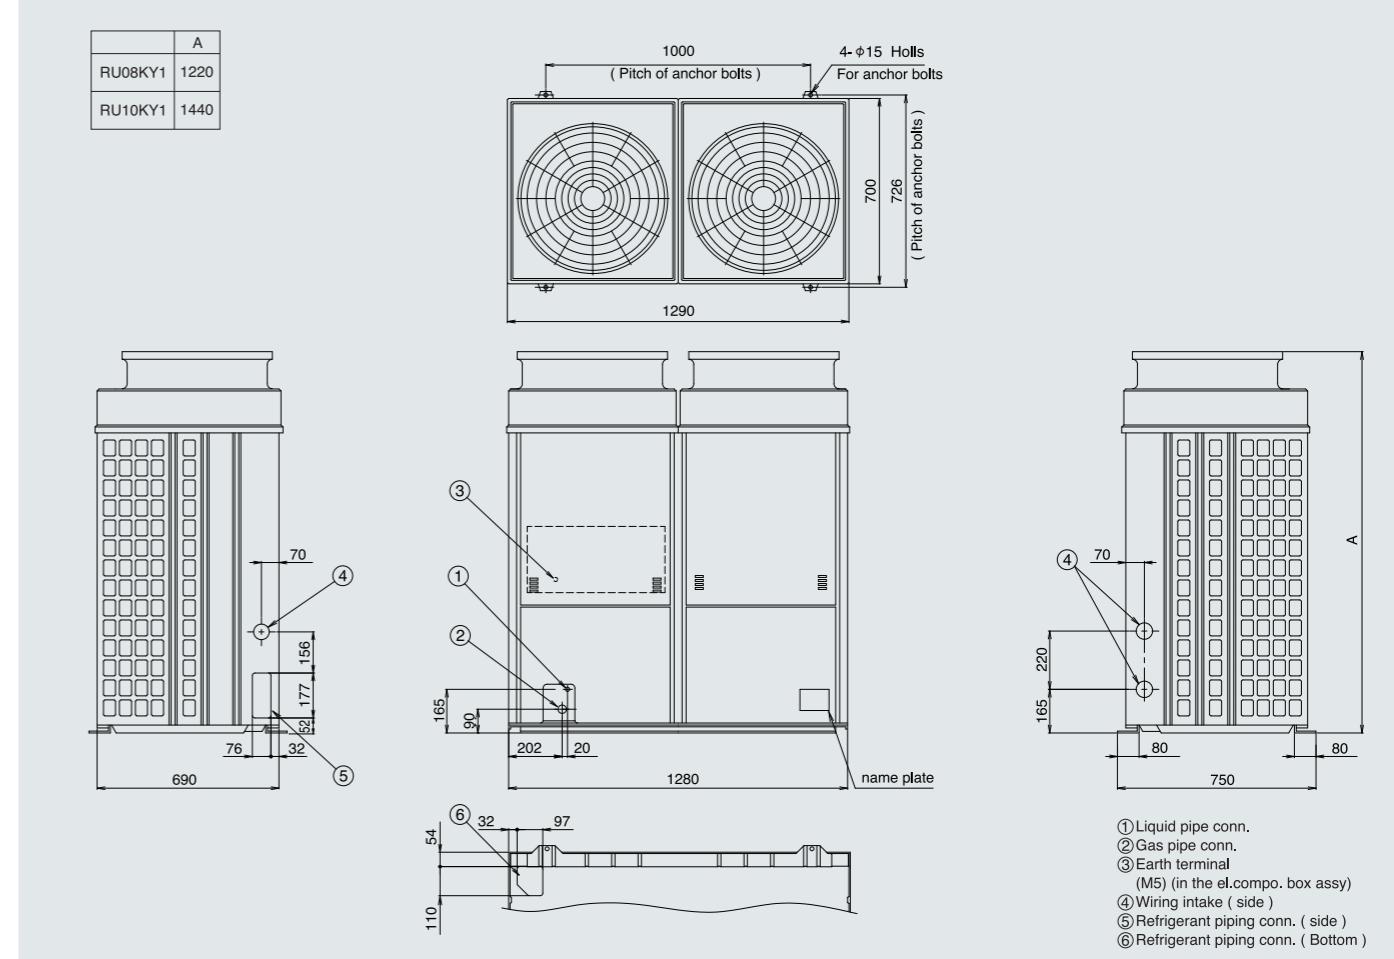

OUTDOOR UNIT // RU08KUY1/10KUY1

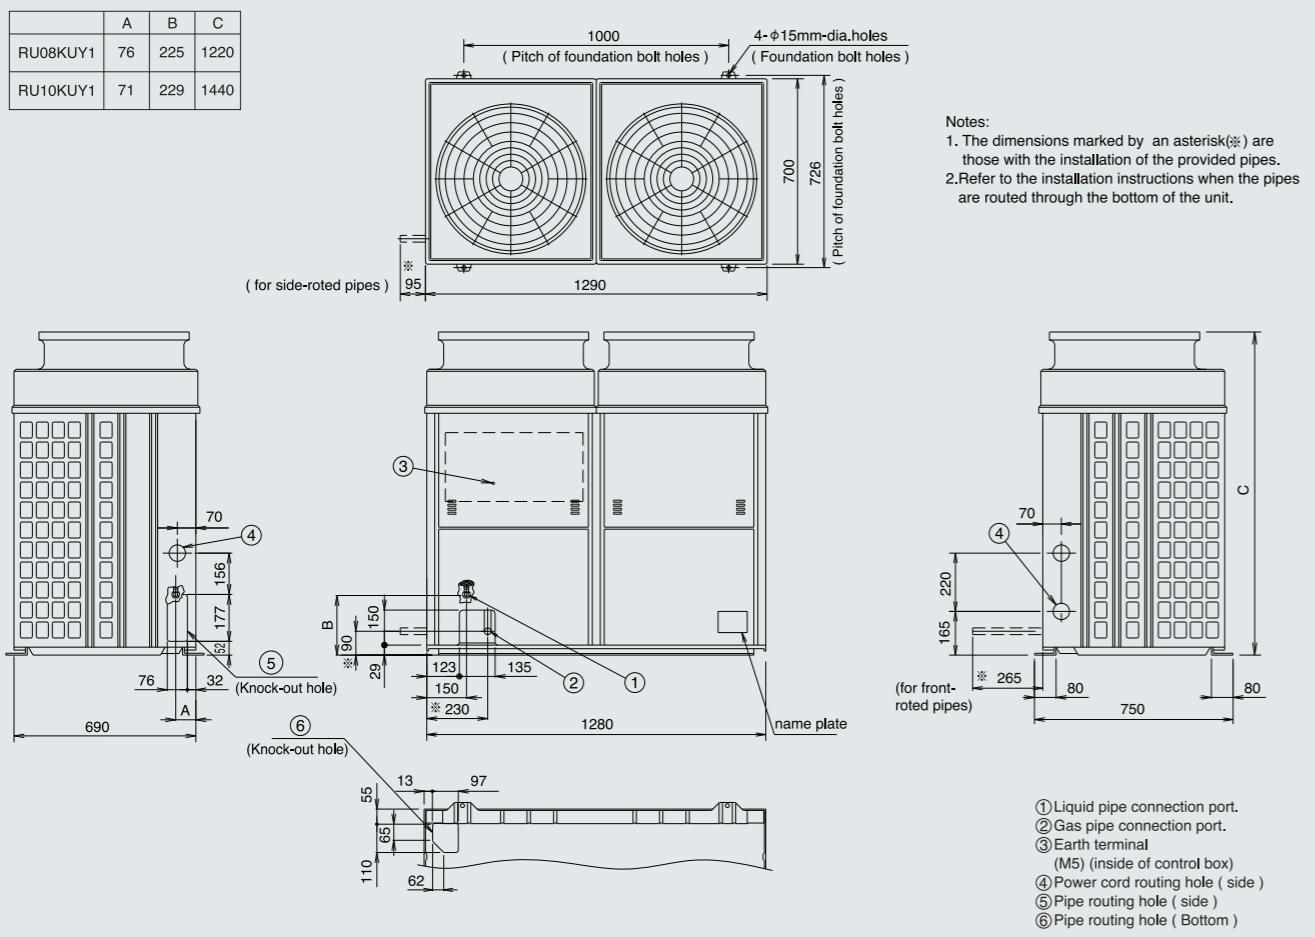


OUTDOOR UNIT // R(Y)200KUY1/250KUY1

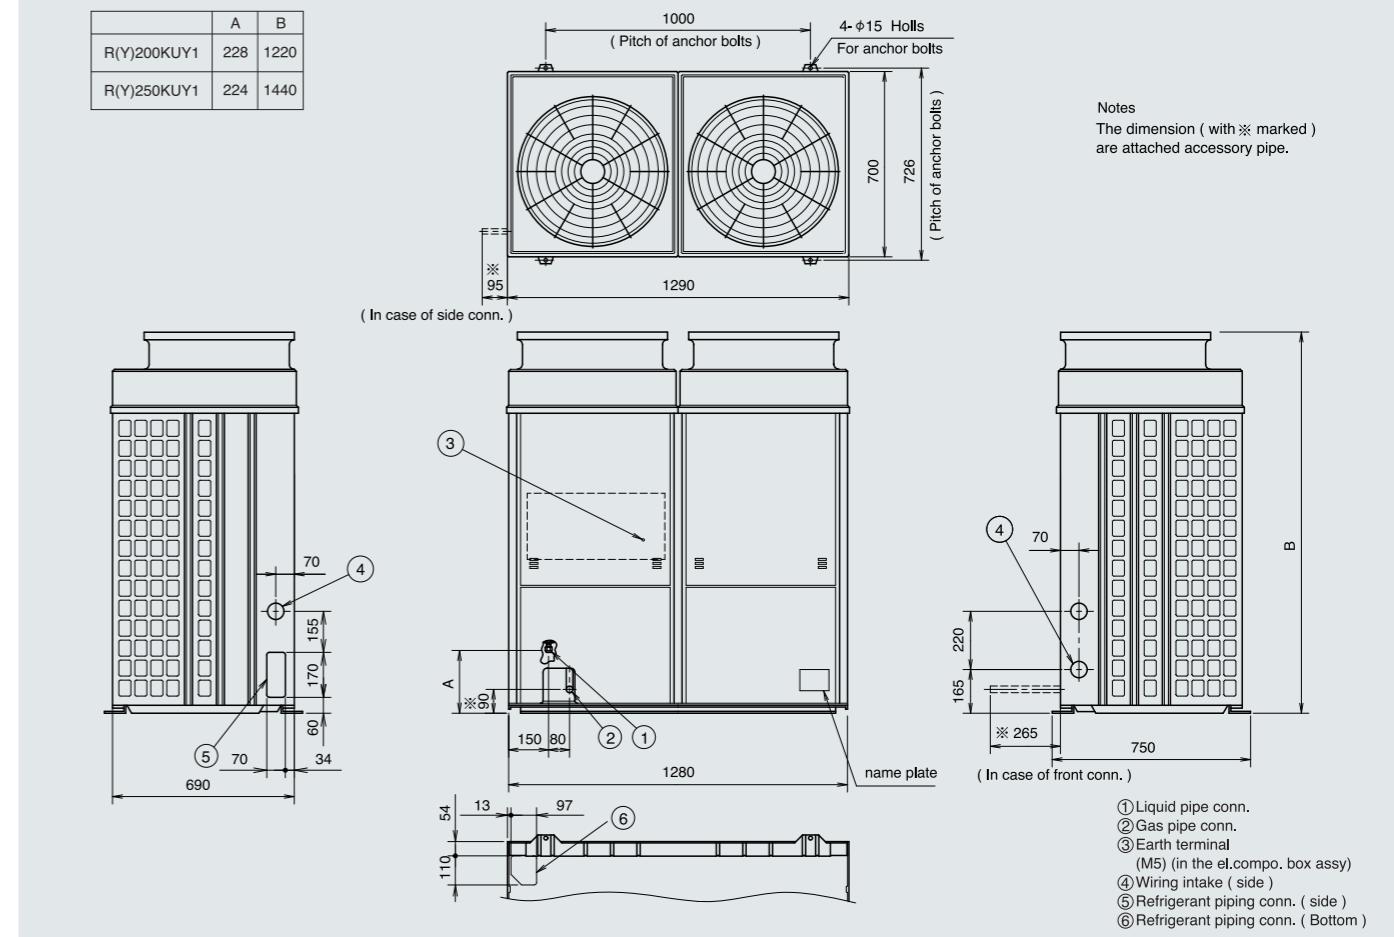


DIMENSIONS (Unit: mm)

REMOTE CONTROLLER


Wireless type

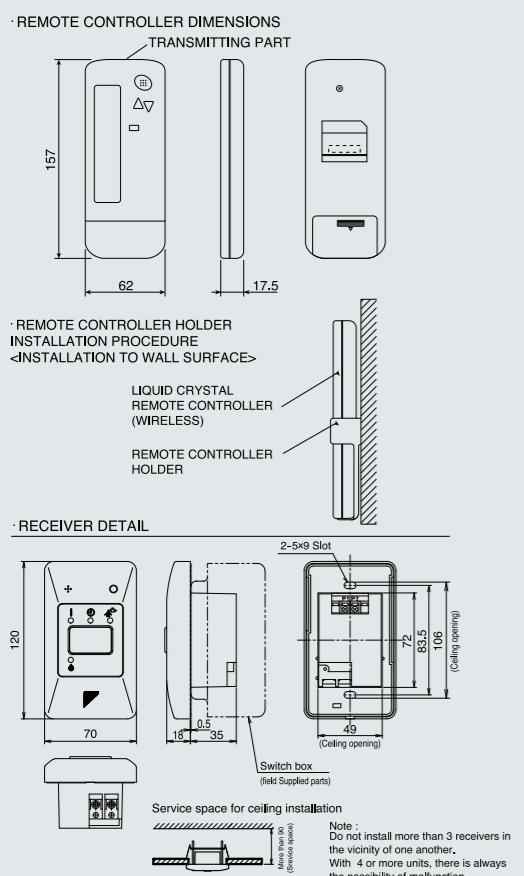

Wired type

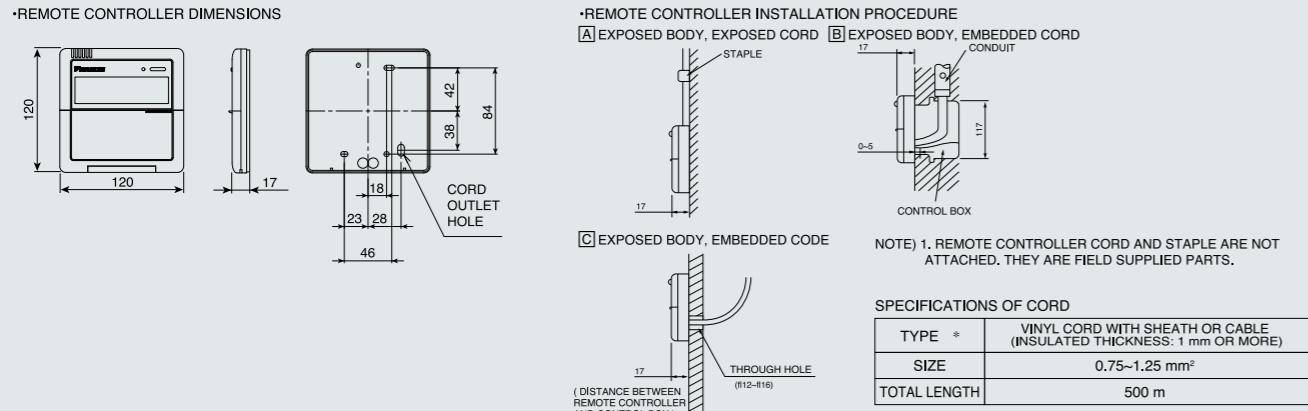

DIGITAL REMOTE CONTROLLER KRC47-2A/KRC47-4A

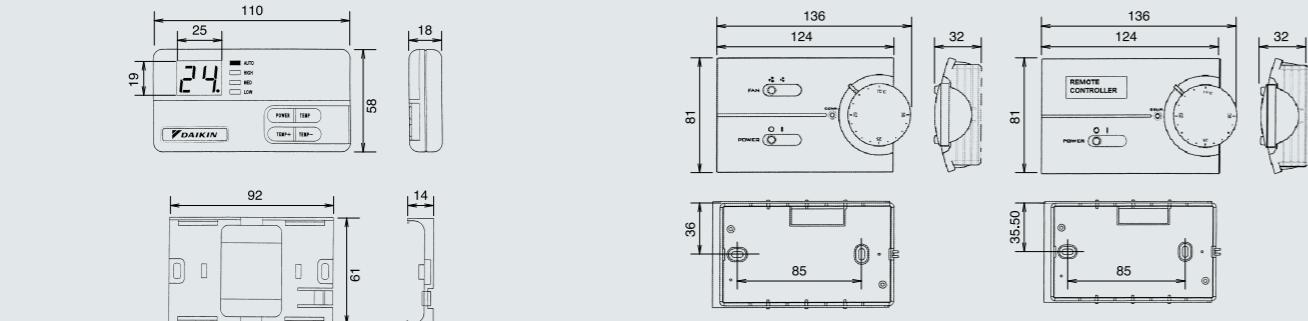

[Space required for outdoor unit installation] (Unit: mm)

Dimensions inside brackets [] indicate case where air direction adjustment guide is adjusted downward.

For R(Y)71LU-140LU


The values represent the case for the R(Y)71 type through R(Y)140 type.
The dimensions in () are for the R(Y)100 and R(Y)140 type (The unit values is mm.)

When there is an obstruction on the inlet side


When the overhead space is open

1. For single unit installation

When there is an obstruction only on the inlet side




When there are obstructions on both sides



2. For series installation (more than two units)

When there are obstructions on the inlet side and both lateral sides




When there is an obstruction in the overhead space

1. For single unit installation


When there is an obstruction on the inlet side

An obstruction in the overhead space



2. For series installation (more than two units)

When there are obstructions on the inlet side and both lateral sides

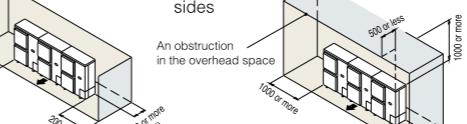


When there is an obstruction on the outlet side

When the overhead space is open

1. For single unit installation


When there is an obstruction only on the outlet side



When there is an obstruction in the overhead space

1. For single unit installation

When there is an obstruction in the overhead space

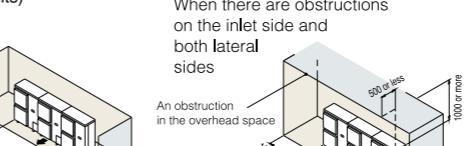


When there are obstructions on both the inlet and outlet sides

When the overhead space is open

1. For single unit installation


When the obstruction on the outlet side is higher than the unit itself (There is no limit to the height of the obstruction on the outlet side.)

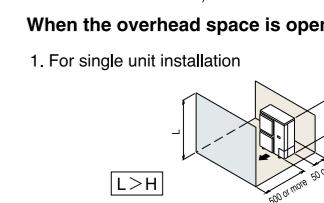

When the overhead space is open

1. For single unit installation


When the obstruction on the outlet side is higher than the unit itself (There is no limit to the height of the obstruction on the outlet side.)

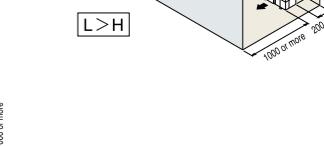


For R(Y)200KU/250KU

In case of single installation


Pattern 1

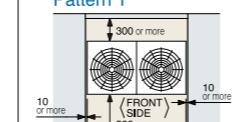

Pattern 2

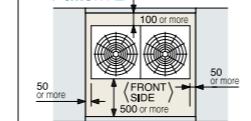


Pattern 3

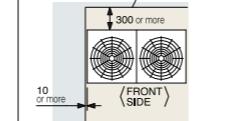


In case of parallel installation


Pattern 1

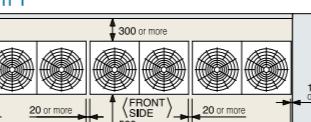

Pattern 2

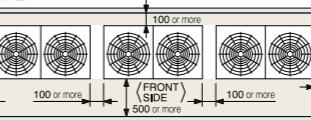


Pattern 3


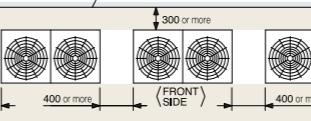


In case of set installation

Pattern 1



Pattern 2

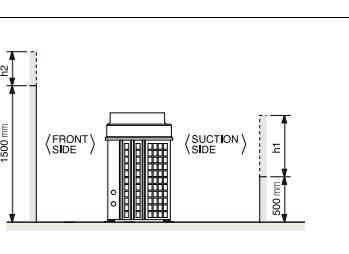

Notes:
① Obstacles height of (Pattern 1) and (Pattern 2) shall be as follows:

Front side 1500 mm

Suction side 500 mm

Side No (imitation)

② For the service space, if the obstacle of height exceeds the above mentioned dimensions, half of the exceeded dimensions shall be added to the standard service space.

③ When installing a unit, choose the most suitable one from this manual depending on actual conditions such as walking passage and ventilation.

(If the number of units is more than that shown in this manual, take short circuit into account.)

④ For the service space for front side, take the service space required for field piping into account.